



Florida Department of Environmental Protection
Division of Waste Management
MS #4500
2600 Blair Stone Road
Tallahassee, Florida 32399-2400

May 3, 2017

To Whom It May Concern:

Attached is a copy of the Initial Notice of Contamination Beyond Property Boundaries form required by 62-780.220(2), Florida Administrative Code.

The PCB impacts referenced in the attached form have been identified as part of a site investigation performed under the review and supervision of United States Environmental Protection Agency (USEPA) pursuant to the Toxic Substance Control Act (TSCA). All assessment and remediation activities regarding these impacts will be reviewed and approved by USEPA as the lead agency for this project.

Please do not hesitate to contact me for additional information.

Sincerely,

Jessica Pennington
Director of Safety and Environmental Compliance
Emerald Transformer
850-401-3200

CC:

Walton County Health Department
362 FL-83, Defuniak Springs, FL 32433

Florida Department of Environmental Protection
Northwest District Office
160 W. Government Street, Suite 308
Pensacola, Florida 32502

RECEIVED
DEPARTMENT OF
ENVIRONMENTAL PROTECTION
2017 MAY 10 AM 8:09
PETROLEUM
RESTORATION PROGRAM



Initial Notice of Contamination Beyond Property Boundaries

DEP Form # 62-780.900(1)
Form Title: Initial Notice of
Contamination Beyond
Property Boundaries
Effective Date: 06/12/13
Incorporated in rule: 62-780.220

This form provides written notification of the discovery of contamination [as defined in subsection 62-780.200(9), F.A.C.] required by subsection 62-780.220(2), Florida Administrative Code (F.A.C.) and Section 376.30702(2), F.S. If a site is subject to Chapter 62-780, F.A.C., notification shall be postmarked within 10 days from the date of discovery of contamination in any medium beyond the boundaries of the property at which site rehabilitation was initiated pursuant to this chapter. The notification shall be submitted to the Florida Department of Environmental Protection (FDEP), Division of Waste Management, 2600 Blair Stone Road, Tallahassee, Florida 32399-2400, and copies shall be mailed to the County Health Department, to the appropriate FDEP District Office where the property is located, and to all known lessees and tenants of the property at which site rehabilitation was initiated (see Note on page 2). This form and any attached table(s) shall be completed in entirety.

1. Attach completed and separate tables by medium (groundwater, soil, surface water, or sediment) that list all sampling locations; sampling date(s); names of contaminants detected above CTLs; their corresponding CTLs; the contaminant concentration(s); and whether the CTL is based on health or nuisance, organoleptic, or aesthetic concerns.
2. Attach copies of applicable laboratory reports.
3. Attach a vicinity map that shows all of the location(s), date(s) and type(s) of sample(s) collected, the laboratory analytical result(s) for each sample, and the property boundaries for the property at which site rehabilitation was initiated pursuant to this chapter and the real property(ies) at which contamination was discovered.
4. Information regarding the property that is the subject of this site rehabilitation:

FDEP Facility Identification Number: FLR 000 168 203

Owner of Property: VERSATILE PROCESSING GROUP

Contact Person: JESSICA PENNINGTON

Telephone Number: 850-401-3200

E-mail Address: jpennington@emeraldtransformer.com Operator (if applicable): FLORIDA TRANSFORMER DBA EMERALD TRANSFORMER

Property Physical Address: 4509 ST HWY 83 NORTH DEFUNIAK SPRINGS DEFUNIAK SPRINGS, FL 32433

5. Actions taken or proposed actions regarding suspected contamination (e.g., provide additional notice, removal of contaminated soil, connection to public water supply well, provision of bottled water, etc.):

US EPA REGION 4 TSCA DIVISION WAS CONTACTED BY WAY OF SELF DISCLOSURE NOTIFICATION IN 2015 OF PCB CONCENTRATIONS IN CONCRETE SURFACE WIPE SAMPLES > 1MG/KG. A PROFESSIONAL ENVIRONMENTAL CONSULTING FIRM WAS RETAINED TO PERFORM CONCRETE CHIP SAMPLING AND FURTHER EXTENDED TO SOIL SAMPLING BENEATH THE CONCRETE. SAMPLING HAS CONTINUED Laterally and Vertically in order to achieve full characterization of the impacted area as prescribed by EPA 40 CFR 761.61. The lateral and vertical delineation efforts have led across property boundaries to the east onto neighboring property. Neighboring property owners have been notified by means of a meeting and explanation. Intention is to continue working with environmental consultants to complete delineation of PCB impacts and conduct self implementing clean up in accordance with EPA 40 CFR 761.61 to remove and properly dispose of PCB impacted soil.

6. Additional Comments:

To the best of my knowledge and belief, all information submitted on this form is true, accurate, and complete.

Jessica Pennington

Printed Name of PRSR or Authorized Agent or Representative


Provide Affiliation:

Emerald Transformer

Jessica Pennington
Signature of PRSR or Authorized Agent or Representative

Completed by: PRSR or Agent or Representative
(Circle Appropriately)

Date Signed: 5/4/2017

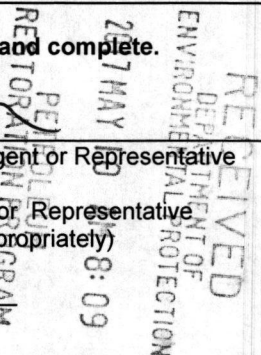

pursuant to this chapter about discovery of contamination beyond the boundaries of the property at which site rehabilitation was initiated pursuant to this chapter. Submission of this form is not an admission of responsibility, liability, or risk associated with potential or actual exposure to such contamination.

DER Form # 62-780.220(1)
Form Title: Initial Notice of
Contamination Beyond
Property Boundaries
Effective Date: 06/12/13
Incorporated in rule: 62-780.220

(Additional pages may be used to complete this form.)



Form #62-780.900(1)
Page Two

Note: A separate page two of Form #62-780.900(1) shall be completed for each separate parcel of real property at which contamination was discovered beyond the boundaries of the property at which site rehabilitation was initiated pursuant to this chapter. Please make additional copies of page two as necessary and staple all pages together for submission. This page of this form does not need to be included in the information that is sent to the lessees and tenants of the property at which site rehabilitation was initiated.

1. Street address of real property at which contamination was discovered beyond the boundaries of the property at which site rehabilitation was initiated pursuant to this chapter:

4483 ST HWY 83 NORTH DEFUNIAK SPRINGS, FL 32433

2. Parcel ID # for the real property identified in 1. above: 02-3N-19-19000-016-0000

3. Name of record owner(s) of the real property identified in 1. above: FREEPORT INDUSTRIES INC

4. Address(es) of record owner(s) as listed in current county property tax office records (if different from answer provided in 1.):


P O BOX 332 FREEPORT, FL 32439

5. Telephone Number(s) of record owner(s): 850-835-1043

6. Date of discovery of contamination at real property identified in 1. above: JANUARY 16, 2017

Remainder of page intentionally left blank.

DRAFT

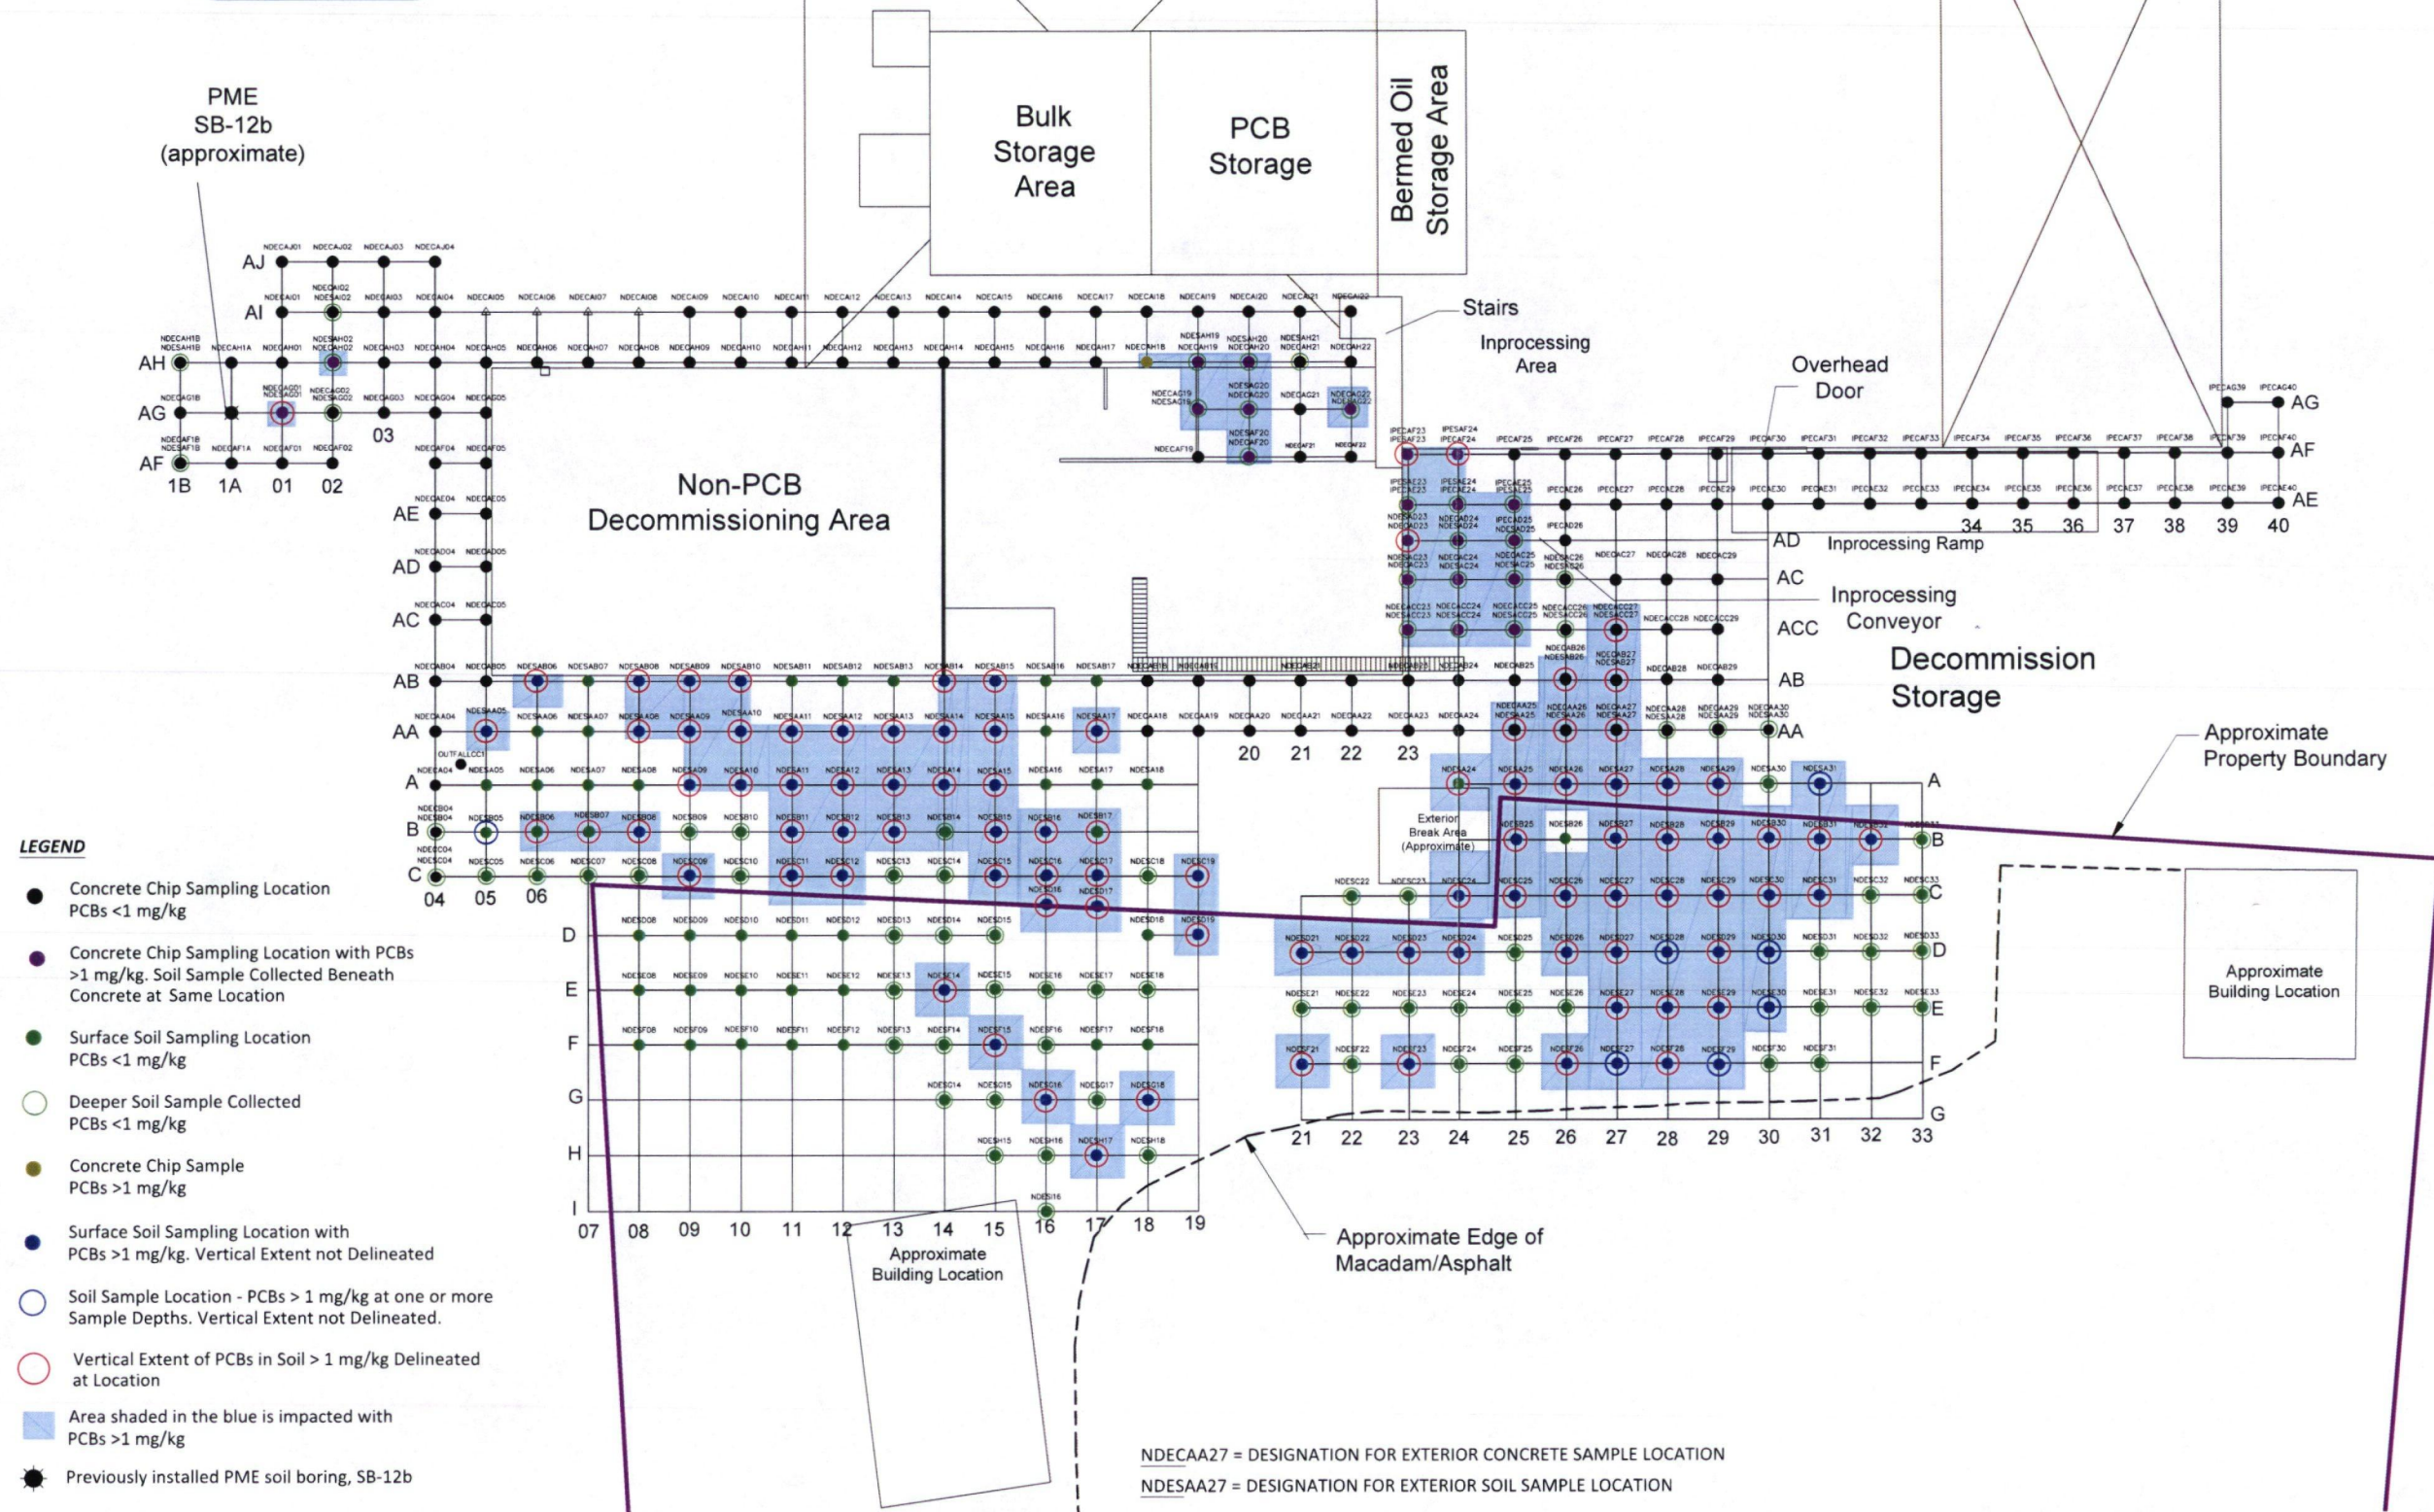

PROJ. No.: 20111296C80
DATE: APRIL 2017

FIGURE 1

No.	DATE	DESCRIPTION	DESIGNER	REVIEWER
1				

SCALE
HORZ.: 1" = 20'
VERT.: 1" = 20'
DATUM:
HORZ.: NAD 83
VERT.: NAVD 83
GRAPHIC SCALE

f FUSS & O'NEILL
140 HARTFORD ROAD
MANCHESTER, CONNECTICUT 06040
860.646.2469
www.fandos.com

EXTERIOR SAMPLE LOCATIONS
FLORIDA TRANSFORMER, INC.
4509 STATE HIGHWAY 83 NORTH
CONNECTICUT

Table 1
Non-PCB Decommissioning Area Exterior Soil and Concrete Characterization Results
Florida Transformer Inc. Defuniak Springs, Florida

						PCBs (Mass Analysis)				
						Aroclor 1016	Aroclor 1242	Aroclor 1254	Aroclor 1260	Total PCBs
						(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)
USEPA High Occupancy Standard						NA	NA	NA	NA	1
Site ID	Sample Material	Date	Sample Type	Starting Depth (ft)	Ending Depth (ft)					
Non-PCB Decommissioning Area Exterior Concrete Samples										
NDECA04	Concrete	04/03/2016	Primary	0.00	0.25	<0.0582	<0.0582	<0.0582	0.11	0.11
NDECAA04	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	0.12	0.12
NDECAA18	Concrete	02/13/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	0.10	0.10
NDECAA19	Concrete	02/13/2016	Primary	0.00	0.25	<0.086	<0.086	<0.086	<0.086	ND
NDECAA20	Concrete	02/13/2016	Primary	0.00	0.25	<0.086	<0.086	<0.086	<0.086	ND
NDECAA21	Concrete	02/13/2016	Primary	0.00	0.25	<0.083	<0.083	<0.083	<0.083	ND
NDECAA22	Concrete	02/13/2016	Primary	0.00	0.25	<0.087	<0.087	<0.087	<0.087	ND
NDECAA23	Concrete	02/13/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	<0.085	ND
NDECAA24	Concrete	02/13/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	<0.085	ND
NDECAA24	Concrete	02/13/2016	Duplicate	0.00	0.25	<0.086	<0.086	<0.086	<0.086	ND
NDECAA25	Concrete	08/26/2016	Primary	0.00	0.25	<0.0222	<0.0222	<0.0222	<0.0148	ND
NDECAA26	Concrete	08/26/2016	Primary	0.00	0.25	<0.0214	<0.0214	<0.0214	<0.0143	ND
NDECAA27	Concrete	08/26/2016	Primary	0.00	0.25	<0.0229	<0.0229	<0.0229	<0.0152	ND
NDECAA28	Concrete	01/11/2017	Primary	0.00	0.25	<0.0526	<0.0526	<0.0526	<0.0350	ND
NDECAA29	Concrete	01/11/2017	Primary	0.00	0.25	<0.0522	<0.0522	<0.0522	<0.0348	ND
NDECAA29	Concrete	01/11/2017	Duplicate	0.00	0.25	<0.0550	<0.0550	<0.0550	<0.0366	ND
NDECAA30	Concrete	02/09/2017	Primary	0.00	0.25	<0.0579	<0.0579	<0.0579	<0.0386	ND
NDECA04	Concrete	02/12/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	<0.085	ND
NDECA05	Concrete	02/12/2016	Primary	0.00	0.25	<0.083	<0.083	<0.083	<0.083	ND
NDECA18	Concrete	02/13/2016	Primary	0.00	0.25	<0.083	<0.083	<0.083	0.18	0.18
NDECA19	Concrete	02/13/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	0.11	0.11
NDECA20	Concrete	02/13/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	0.097	0.097
NDECA21	Concrete	02/13/2016	Primary	0.00	0.25	<0.082	<0.082	<0.082	<0.082	ND
NDECA22	Concrete	02/13/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	<0.084	ND
NDECA23	Concrete	02/13/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	0.10	0.10
NDECA24	Concrete	02/13/2016	Primary	0.00	0.25	<0.087	<0.087	<0.087	0.097	0.097
NDECA25	Concrete	04/03/2016	Primary	0.00	0.25	<0.0532	<0.0532	<0.0532	0.0429	0.0429
NDECA26	Concrete	06/04/2016	Primary	0.00	1.00	<0.0197	<0.0197	<0.0197	0.0224	0.0224
NDECA27	Concrete	08/26/2016	Primary	0.00	0.25	<0.0218	<0.0218	<0.0218	<0.0145	ND
NDECA28	Concrete	01/11/2017	Primary	0.00	0.25	<0.0536	<0.0536	<0.0536	0.0371	0.0371
NDECA29	Concrete	01/11/2017	Primary	0.00	0.25	<0.0580	<0.0580	<0.0580	<0.0386	ND
NDECA04	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	<0.084	ND
NDECA05	Concrete	02/12/2016	Primary	0.00	0.25	<0.082	<0.082	<0.082	0.096	0.096
NDECA23	Concrete	02/13/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	2.5	2.5
NDECA24	Concrete	02/13/2016	Primary	0.00	0.25	<0.086	<0.086	<0.086	1.5	1.5
NDECA25	Concrete	04/03/2016	Primary	0.00	0.25	<0.0542	<0.0542	0.295	0.955	1.25
NDECA26	Concrete	06/04/2016	Primary	0.00	1.00	<0.0201	<0.0201	0.0318	0.0346	0.0664
NDECA27	Concrete	01/11/2017	Primary	0.00	0.25	<0.0604	<0.0604	<0.0604	0.0631	0.0631
NDECA28	Concrete	01/11/2017	Primary	0.00	0.25	<0.0567	<0.0567	<0.0567	<0.0378	ND
NDECA29	Concrete	01/11/2017	Primary	0.00	0.25	<0.0528	<0.0528	<0.0528	0.0744	0.0744
NDECA23	Concrete	02/13/2016	Primary	0.00	0.25	<0.086	<0.086	<0.086	1.2	1.2
NDECA24	Concrete	02/13/2016	Primary	0.00	0.25	<0.086	<0.086	<0.086	2.4	2.4
NDECA25	Concrete	04/03/2016	Primary	0.00	0.25	<0.286	<0.286	<0.286	2.32	2.32
NDECA26	Concrete	06/04/2016	Primary	0.00	1.00	<0.0202	<0.0202	<0.0202	0.0410	0.0410
NDECA27	Concrete	08/26/2016	Primary	0.00	0.25	<0.0226	<0.0226	<0.0226	0.0263	0.0263
NDECA28	Concrete	01/11/2017	Primary	0.00	0.25	<0.0578	<0.0578	<0.0578	<0.0385	ND
NDECA29	Concrete	01/11/2017	Primary	0.00	0.25	<0.0576	<0.0576	<0.0576	<0.0384	ND
NDECA04	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	0.094	0.094
NDECA05	Concrete	02/12/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	0.12	0.12
NDECA05	Concrete	02/12/2016	Duplicate	0.00	0.25	<0.084	<0.084	<0.084	0.14	0.14
NDECA23	Concrete	02/13/2016	Primary	0.00	0.25	<0.086	<0.086	<0.086	17	17
NDECA24	Concrete	02/13/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	3.9	3.9
NDECA25	Concrete	04/03/2016	Primary	0.00	0.25	<0.109	<0.109	<0.109	2.03	2.03
NDECA26	Concrete	04/03/2016	Primary	0.00	0.25	<0.0589	<0.0589	<0.0589	<0.0393	ND
NDECA04	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	0.15	0.15
NDECA05	Concrete	02/12/2016	Primary	0.00	0.25	<0.082	<0.082	<0.082	0.16	0.16
NDECAF01	Concrete	02/13/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	<0.085	ND
NDECAF02	Concrete	04/02/2016	Primary	0.00	0.25	<0.0625	<0.0625	<0.0625	<0.0416	ND
NDECAF02	Concrete	04/03/2016	Primary	2.00	2.25	<0.0603	<0.0603	<0.0603	0.451	0.451
NDECAF04	Concrete	02/12/2016	Primary	0.00	0.25	<0.083	<0.083	<0.083	0.19	0.19
NDECAF05	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	<0.084	ND
NDECAF19	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.23	0.23
NDECAF1A	Concrete	02/13/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	<0.085	ND
NDECAF1B	Concrete	02/13/2016	Primary	0.00	0.25	<0.083	<0.083	<0.083	<0.083	ND
NDECAF20	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	6.7	6.7
NDECAF21	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.22	0.22
NDECAF22	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.60	0.60
NDECA01	Concrete	02/12/2016	Primary	0.00	0.25	<0.083	<0.083	<0.083	1.6	1.6
NDECA02	Concrete	02/12/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	<0.085	ND
NDECA03	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	<0.084	ND
NDECA04	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	0.13	0.13
NDECA05	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	<0.084	ND
NDECA19	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	1.6	1.6
NDECA1B	Concrete	02/13/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	<0.085	ND
NDECA20	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	1.6	1.6
NDECA21	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.88	0.88
NDECA22	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	2.9	2.9

Table 1
Non-PCB Decommissioning Area Exterior Soil and Concrete Characterization Results
Florida Transformer Inc. Defuniak Springs, Florida

						PCBs (Mass Analysis)				Total PCBs (mg/kg)
						Aroclor 1016 (mg/kg)	Aroclor 1242 (mg/kg)	Aroclor 1254 (mg/kg)	Aroclor 1260 (mg/kg)	
USEPA High Occupancy Standard						NA	NA	NA	NA	1
Site ID	Sample Material	Date	Sample Type	Starting Depth (ft)	Ending Depth (ft)					
Non-PCB Decommissioning Area Exterior Concrete Samples (Continued)										
NDECAH01	Concrete	02/12/2016	Primary	0.00	0.25	<0.083	<0.083	<0.083	<0.083	ND
NDECAH02	Concrete	02/12/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	<0.085	ND
NDECAH02	Concrete	04/03/2016	Primary	4.00	4.25	<0.276	<0.276	<0.276	4.38	4.38
NDECAH03	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	<0.084	ND
NDECAH04	Concrete	02/12/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	0.21	0.21
NDECAH05	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.16	0.16
NDECAH06	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.065	0.065
NDECAH07	Concrete	02/12/2016	Primary	0.00	0.25	<0.016	<0.016	<0.016	0.036	0.036
NDECAH08	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.46	0.46
NDECAH09	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.18	0.18
NDECAH10	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.50	0.50
NDECAH11	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.82	0.82
NDECAH12	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.28	0.28
NDECAH12	Concrete	02/12/2016	Duplicate	0.00	0.25	<0.084	<0.084	<0.084	0.37	0.37
NDECAH13	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.20	0.20
NDECAH14	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.099	0.099
NDECAH15	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.098	0.098
NDECAH16	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.27	0.27
NDECAH17	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.55	0.55
NDECAH18	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	2.4	2.4
NDECAH19	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	8.7	8.7
NDECAH1A	Concrete	02/13/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	<0.085	ND
NDECAH1B	Concrete	02/13/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	<0.084	ND
NDECAH20	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	1.4	1.4
NDECAH21	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	1.0	1.0
NDECAH22	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.41	0.41
NDECAI01	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	<0.084	ND
NDECAI02	Concrete	02/12/2016	Primary	0.00	0.25	<0.082	<0.082	<0.082	<0.082	ND
NDECAI03	Concrete	02/12/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	<0.085	ND
NDECAI04	Concrete	02/12/2016	Primary	0.00	0.25	<0.083	<0.083	<0.083	<0.083	ND
NDECAI04	Concrete	02/12/2016	Duplicate	0.00	0.25	<0.086	<0.086	<0.086	<0.086	ND
NDECAI05	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	<0.084	ND
NDECAI06	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	0.21	0.21
NDECAI07	Concrete	02/12/2016	Primary	0.00	0.25	<0.083	<0.083	<0.083	0.10	0.10
NDECAI07	Concrete	02/12/2016	Duplicate	0.00	0.25	<0.085	<0.085	<0.085	<0.085	ND
NDECAI08	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	0.68	0.68
NDECAI09	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.16	0.16
NDECAI10	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.11	0.11
NDECAI11	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.069	0.069
NDECAI12	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.051	0.051
NDECAI13	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.076	0.076
NDECAI14	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.73	0.73
NDECAI15	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.11	0.11
NDECAI16	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.093	0.093
NDECAI17	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.27	0.27
NDECAI17	Concrete	02/12/2016	Duplicate	0.00	0.25	<0.084	<0.084	<0.084	0.31	0.31
NDECAI18	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.17	0.17
NDECAI19	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.12	0.12
NDECAI20	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.17	0.17
NDECAI21	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.97	0.97
NDECAI22	Concrete	02/12/2016	Primary	0.00	0.25	<0.017	<0.017	<0.017	0.13	0.13
NDECAJ01	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	<0.084	ND
NDECAJ02	Concrete	02/12/2016	Primary	0.00	0.25	<0.084	<0.084	<0.084	<0.084	ND
NDECAJ03	Concrete	02/12/2016	Primary	0.00	0.25	<0.086	<0.086	<0.086	<0.086	ND
NDECAJ04	Concrete	02/12/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	<0.085	ND
NDECB04	Concrete	03/30/2017	Primary	0.00	0.25	<0.0581	<0.0581	<0.0581	<0.0387	<0.0387
NDECC04	Concrete	03/30/2017	Primary	0.00	0.25	<0.0564	<0.0564	<0.0564	<0.0376	<0.0376
OUTFLCC1	Concrete	03/30/2017	Primary	0.00	0.25	<0.0554	<0.0554	<0.0554	0.0483	0.0483
Non-PCB Decommissioning Area Exterior Soil Samples										
NDESA05	Soil	04/02/2016	Primary	0.00	0.21	<0.0207	<0.0207	<0.0207	0.353	0.353
NDESA06	Soil	04/02/2016	Primary	0.00	0.21	<0.0216	<0.0216	<0.0216	0.35	0.35
NDESA07	Soil	04/02/2016	Primary	0.00	0.21	<0.0207	<0.0207	<0.0207	0.13	0.13
NDESA08	Soil	04/02/2016	Primary	0.00	0.21	<0.0206	<0.0206	<0.0206	0.36	0.36
NDESA09	Soil	04/02/2016	Primary	0.00	0.21	<0.0420	<0.0420	<0.0420	1.02	1.02
NDESA09	Soil	06/03/2016	Primary	0.50	1.50	<0.0864	<0.0864	<0.0864	0.959	0.959
NDESA09	Soil	06/03/2016	Primary	1.50	2.50	<0.0212	<0.0212	<0.0212	0.522	0.522
NDESA10	Soil	04/02/2016	Primary	0.00	0.21	<0.103	<0.103	<0.103	1.87	1.87
NDESA10	Soil	06/03/2016	Primary	0.50	1.50	<0.0222	<0.0222	<0.0222	0.0983	0.0983
NDESA10	Soil	06/03/2016	Primary	1.50	2.50	<0.0229	<0.0229	<0.0229	0.355	0.355
NDESA11	Soil	04/02/2016	Primary	0.00	0.21	<0.106	<0.106	<0.106	2.15	2.15
NDESA11	Soil	06/03/2016	Primary	0.50	1.50	<0.0240	<0.0240	<0.0240	0.183	0.183
NDESA11	Soil	06/03/2016	Primary	1.50	2.50	<0.0248	<0.0248	<0.0248	0.0262	0.0262
NDESA12	Soil	04/02/2016	Primary	0.00	0.21	<0.211	<0.211	<0.211	2.5	2.5
NDESA12	Soil	06/03/2016	Primary	0.50	1.50	<1.09	<1.09	<1.09	25.9	25.9
NDESA12	Soil	06/03/2016	Primary	1.50	2.50	<0.107	<0.107	<0.107	1.8	1.8
NDESA12	Soil	08/26/2016	Primary	2.50	3.50	<0.200	<0.200	<0.200	2.38	2.38
NDESA12	Soil	08/26/2016	Primary	3.50	4.50	<0.104	<0.104	<0.104	1.01	1.01
NDESA12	Soil	01/12/2017	Primary	4.50	5.50	<0.0201	<0.0201	<0.0201	0.0264	0.0264
NDESA12	Soil	01/12/2017	Primary	5.50	6.50	<0.0208	<0.0208	<0.0208	<0.0138	ND

Table 1
Non-PCB Decommissioning Area Exterior Soil and Concrete Characterization Results
Florida Transformer Inc. Defuniak Springs, Florida

						PCBs (Mass Analysis)				
						Aroclor 1016 (mg/kg)	Aroclor 1242 (mg/kg)	Aroclor 1254 (mg/kg)	Aroclor 1260 (mg/kg)	Total PCBs (mg/kg)
USEPA High Occupancy Standard						NA	NA	NA	NA	1
Site ID	Sample Material	Date	Sample Type	Starting Depth (ft)	Ending Depth (ft)					
Non-PCB Decommissioning Area Exterior Soil Samples (Continued)										
NDESA13	Soil	04/02/2016	Primary	0.00	0.21	<0.104	<0.104	<0.104	2.2	2.2
NDESA13	Soil	06/03/2016	Primary	0.50	1.50	<0.441	<0.441	<0.441	9.04	9.04
NDESA13	Soil	06/03/2016	Primary	1.50	2.50	<0.0209	<0.0209	<0.0209	0.0423	0.0423
NDESA14	Soil	04/02/2016	Primary	0.00	0.21	<0.103	<0.103	<0.103	2.68	2.68
NDESA14	Soil	06/03/2016	Primary	0.50	1.50	<0.0424	<0.0424	<0.0424	0.694	0.694
NDESA14	Soil	06/03/2016	Primary	1.50	2.50	<0.0213	<0.0213	<0.0213	0.128	0.128
NDESA15	Soil	04/02/2016	Primary	0.00	0.21	<0.105	<0.105	<0.105	1.91	1.91
NDESA15	Soil	06/03/2016	Primary	0.50	1.50	<0.0206	<0.0206	<0.0206	0.0255	0.0255
NDESA15	Soil	06/03/2016	Primary	1.50	2.50	<0.205	<0.205	<0.205	5.71	5.71
NDESA15	Soil	08/26/2016	Primary	2.50	3.50	<1.04	<1.04	<1.04	9.07	9.07
NDESA15	Soil	08/26/2016	Primary	3.50	4.50	<0.0235	<0.0235	<0.0235	<0.0157	ND
NDESA16	Soil	04/02/2016	Primary	0.00	0.21	<0.106	<0.106	<0.106	0.954	0.954
NDESA17	Soil	04/02/2016	Primary	0.00	0.21	<0.0208	<0.0208	<0.0208	0.444	0.444
NDESA18	Soil	04/02/2016	Primary	0.00	0.21	<0.0214	<0.0214	<0.0214	0.248	0.248
NDESA24	Soil	02/09/2017	Primary	0.00	1.00	<0.0247	<0.0247	<0.0247	0.238	0.238
NDESA24	Soil	02/09/2017	Primary	1.00	2.00	<2.11	<2.11	<2.11	22	22
NDESA24	Soil	03/30/2017	Primary	2.00	3.00	<0.0199	<0.0199	<0.0199	0.235	0.235
NDESA24	Soil	03/30/2017	Primary	3.00	4.00	<0.0208	<0.0208	<0.0208	0.0960	0.0960
NDESA25	Soil	01/11/2017	Primary	0.00	1.00	<1.05	<1.05	<1.05	11	11
NDESA25	Soil	01/11/2017	Primary	1.00	2.00	<0.0217	<0.0217	<0.0217	0.0571	0.0571
NDESA26	Soil	01/11/2017	Primary	0.00	1.00	<0.412	<0.412	<0.412	7.94	7.94
NDESA26	Soil	01/11/2017	Primary	1.00	2.00	<0.00100	<0.00100	<0.00100	4.49	4.49
NDESA26	Soil	02/09/2017	Primary	2.00	3.00	<0.108	<0.108	<0.108	3.1	3.1
NDESA26	Soil	02/09/2017	Primary	3.00	4.00	<0.0211	<0.0211	<0.0211	0.613	0.613
NDESA27	Soil	01/11/2017	Primary	0.00	1.00	<0.392	<0.392	<0.392	4.18	4.18
NDESA27	Soil	01/11/2017	Duplicate	0.00	1.00	<0.202	<0.202	<0.202	4.34	4.34
NDESA27	Soil	01/11/2017	Primary	1.00	2.00	<0.208	<0.208	<0.208	2.35	2.35
NDESA27	Soil	02/09/2017	Primary	2.00	3.00	<0.205	<0.205	<0.205	4.62	4.62
NDESA27	Soil	02/09/2017	Primary	3.00	4.00	<0.106	<0.106	<0.106	1.22	1.22
NDESA27	Soil	03/30/2017	Primary	4.00	5.00	<0.0199	<0.0199	<0.0199	<0.0133	<0.00663
NDESA27	Soil	03/30/2017	Primary	5.00	6.00	<0.0200	<0.0200	<0.0200	<0.0134	<0.00668
NDESA28	Soil	01/11/2017	Primary	0.00	1.00	<0.204	<0.204	<0.204	3.28	3.28
NDESA28	Soil	01/11/2017	Primary	1.00	2.00	<0.00100	<0.00100	<0.00100	3.65	3.65
NDESA28	Soil	02/09/2017	Primary	2.00	3.00	<0.0216	<0.0216	<0.0216	0.309	0.309
NDESA28	Soil	02/09/2017	Primary	3.00	4.00	<0.104	<0.104	<0.104	1.99	1.99
NDESA28	Soil	03/30/2017	Primary	4.00	5.00	<0.0206	<0.0206	<0.0206	<0.0137	<0.00686
NDESA28	Soil	03/30/2017	Primary	5.00	6.00	<0.0198	<0.0198	<0.0198	<0.0132	<0.00662
NDESA29	Soil	01/11/2017	Primary	0.00	1.00	<0.204	<0.204	<0.204	3.34	3.34
NDESA29	Soil	01/11/2017	Primary	1.00	2.00	<0.00100	<0.00100	<0.00100	1.97	1.97
NDESA29	Soil	02/09/2017	Primary	2.00	3.00	<0.0214	<0.0214	<0.0214	0.0485	0.0485
NDESA29	Soil	02/09/2017	Primary	3.00	4.00	<0.0215	<0.0215	<0.0215	0.0732	0.0732
NDESA30	Soil	02/09/2017	Primary	0.00	1.00	<0.0218	<0.0218	<0.0218	0.2	0.2
NDESA30	Soil	02/09/2017	Primary	1.00	2.00	<0.0212	<0.0212	<0.0212	0.149	0.149
NDESA31	Soil	03/29/2017	Primary	0.00	1.00	<0.130	<0.130	<0.130	1.64	1.64
NDESA31	Soil	03/30/2017	Primary	1.00	2.00	<0.103	<0.103	<0.103	2.68	2.68
NDESA05	Soil	02/11/2016	Primary	0.00	0.25	<0.087	<0.087	<0.087	1.7	1.7
NDESA05	Soil	04/02/2016	Primary	0.25	0.50	<0.255	<0.255	<0.255	4.28	4.28
NDESA05	Soil	06/03/2016	Primary	0.50	1.50	<0.108	<0.108	<0.108	0.871	0.871
NDESA05	Soil	06/03/2016	Primary	1.50	2.50	<0.208	<0.208	<0.208	4.91	4.91
NDESA05	Soil	08/26/2016	Primary	2.50	3.50	<0.107	<0.107	<0.107	3.03	3.03
NDESA05	Soil	08/26/2016	Primary	3.50	4.50	<0.0201	<0.0201	<0.0201	<0.0134	ND
NDESA06	Soil	02/11/2016	Primary	0.00	0.25	<0.087	<0.087	<0.087	0.86	0.86
NDESA07	Soil	02/11/2016	Primary	0.00	0.25	<0.093	<0.093	<0.093	0.35	0.35
NDESA08	Soil	02/11/2016	Primary	0.00	0.25	<0.091	<0.091	<0.091	3.4	3.4
NDESA08	Soil	04/02/2016	Primary	0.25	0.50	<0.523	<0.523	<0.523	9.05	9.05
NDESA08	Soil	06/03/2016	Primary	0.50	1.50	<0.0217	<0.0217	<0.0217	0.0497	0.0497
NDESA08	Soil	06/03/2016	Primary	1.50	2.50	<0.0217	<0.0217	<0.0217	<0.0145	ND
NDESA09	Soil	02/11/2016	Primary	0.00	0.25	<0.090	<0.090	<0.090	3.4	3.4
NDESA09	Soil	04/02/2016	Primary	0.25	0.50	<0.235	<0.235	<0.235	3.52	3.52
NDESA09	Soil	06/03/2016	Primary	0.50	1.50	<0.0216	<0.0216	<0.0216	0.0804	0.0804
NDESA09	Soil	06/03/2016	Primary	1.50	2.50	<0.0217	<0.0217	<0.0217	0.0220	0.0220
NDESA10	Soil	02/11/2016	Primary	0.00	0.25	<0.089	<0.089	<0.089	1.5	1.5
NDESA10	Soil	04/02/2016	Primary	0.25	0.50	<0.122	<0.122	<0.122	1.48	1.48
NDESA10	Soil	06/03/2016	Primary	0.50	1.50	<0.107	<0.107	<0.107	1.98	1.98
NDESA10	Soil	06/03/2016	Primary	1.50	2.50	<0.104	<0.104	<0.104	1.48	1.48
NDESA10	Soil	08/26/2016	Primary	2.50	3.50	<0.0229	<0.0229	<0.0229	0.574	0.574
NDESA10	Soil	08/26/2016	Primary	3.50	4.50	<0.205	<0.205	<0.205	4.41	4.41
NDESA10	Soil	01/12/2017	Primary	4.50	5.50	<0.0204	<0.0204	<0.0204	<0.0136	ND
NDESA10	Soil	01/12/2017	Primary	5.50	6.50	<0.0204	<0.0204	<0.0204	<0.0136	ND
NDESA11	Soil	02/11/2016	Primary	0.00	0.25	<0.092	<0.092	<0.092	3.7	3.7
NDESA11	Soil	04/02/2016	Primary	0.25	0.50	<0.0242	<0.0242	<0.0242	0.514	0.514
NDESA12	Soil	02/11/2016	Primary	0.00	0.25	<0.085	<0.085	<0.085	1.5	1.5
NDESA12	Soil	04/02/2016	Primary	0.25	0.50	<0.245	<0.245	<0.245	4.06	4.06
NDESA12	Soil	06/03/2016	Primary	0.50	1.50	<0.104	<0.104	<0.104	2.11	2.11
NDESA12	Soil	06/03/2016	Primary	1.50	2.50	<0.107	<0.107	<0.107	1.92	1.92
NDESA12	Soil	08/26/2016	Primary	2.50	3.50	<0.104	<0.104	<0.104	3.04	3.04
NDESA12	Soil	08/26/2016	Primary	3.50	4.50	<0.0204	<0.0204	<0.0204	<0.0136	ND

Table 1
Non-PCB Decommissioning Area Exterior Soil and Concrete Characterization Results
Florida Transformer Inc. Defuniak Springs, Florida

						PCBs (Mass Analysis)				
						Aroclor 1016	Aroclor 1242	Aroclor 1254	Aroclor 1260	Total PCBs
						(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)
USEPA High Occupancy Standard						NA	NA	NA	NA	1
Site ID	Sample Material	Date	Sample Type	Starting Depth (ft)	Ending Depth (ft)					
Non-PCB Decommissioning Area Exterior Soil Samples (Continued)										
NDESAA13	Soil	02/11/2016	Primary	0.00	0.25	<0.091	<0.091	<0.091	2.1	2.1
NDESAA13	Soil	04/02/2016	Primary	0.25	0.50	<0.0253	<0.0253	<0.0253	0.676	0.676
NDESAA14	Soil	02/11/2016	Primary	0.00	0.25	<0.091	<0.091	<0.091	3.0	3.0
NDESAA14	Soil	04/02/2016	Primary	0.25	0.50	<0.242	<0.242	<0.242	4.5	4.5
NDESAA14	Soil	06/03/2016	Primary	0.50	1.50	<0.103	<0.103	<0.103	2.86	2.86
NDESAA14	Soil	06/03/2016	Primary	1.50	2.50	<0.212	<0.212	<0.212	2.91	2.91
NDESAA14	Soil	08/26/2016	Primary	2.50	3.50	<0.251	<0.251	<0.251	3.98	3.98
NDESAA14	Soil	08/26/2016	Primary	3.50	4.50	<0.0256	<0.0256	<0.0256	<0.0171	ND
NDESAA15	Soil	02/11/2016	Primary	0.00	0.25	<0.092	<0.092	<0.092	1.5	1.5
NDESAA15	Soil	04/02/2016	Primary	0.25	0.50	<0.243	<0.243	<0.243	3.56	3.56
NDESAA15	Soil	06/03/2016	Primary	0.50	1.50	<0.523	<0.523	<0.523	4.23	4.23
NDESAA15	Soil	06/03/2016	Primary	1.50	2.50	<0.510	<0.510	<0.510	2.98	2.98
NDESAA15	Soil	08/27/2016	Primary	2.50	3.50	<0.0213	<0.0213	<0.0213	0.0427	0.0427
NDESAA15	Soil	08/27/2016	Duplicate	2.50	3.50	<0.123	<0.123	<0.123	1.6	1.6
NDESAA15	Soil	08/27/2016	Primary	3.50	4.50	<0.0242	<0.0242	<0.0242	0.0261	0.0261
NDESAA16	Soil	02/11/2016	Primary	0.00	0.25	<0.090	<0.090	<0.090	0.54	0.54
NDESAA17	Soil	02/12/2016	Primary	0.00	0.25	<0.086	<0.086	<0.086	4.2	4.2
NDESAA17	Soil	02/12/2016	Duplicate	0.00	0.25	<0.085	<0.085	<0.085	2.0	2.0
NDESAA17	Soil	04/02/2016	Primary	0.25	0.50	<0.210	<0.210	<0.210	4.61	4.61
NDESAA17	Soil	06/03/2016	Primary	0.50	1.50	<0.212	<0.212	<0.212	6.17	6.17
NDESAA17	Soil	06/03/2016	Primary	1.50	2.50	<0.421	<0.421	<0.421	6.64	6.64
NDESAA17	Soil	08/27/2016	Primary	2.50	3.50	<0.253	<0.253	<0.253	8.13	8.13
NDESAA17	Soil	08/27/2016	Duplicate	2.50	3.50	<0.221	<0.221	<0.221	9.60	9.60
NDESAA17	Soil	08/27/2016	Primary	3.50	4.50	<0.119	<0.119	<0.119	2.37	2.37
NDESAA17	Soil	01/12/2017	Primary	4.50	5.50	<0.0209	<0.0209	<0.0209	0.0456	0.0456
NDESAA17	Soil	01/12/2017	Duplicate	4.50	5.50	<0.0211	<0.0211	<0.0211	0.115	0.115
NDESAA17	Soil	01/12/2017	Primary	5.50	6.50	<0.0201	<0.0201	<0.0201	0.0248	0.0248
NDESAA25	Soil	08/27/2016	Primary	0.50	1.50	<4.33	<4.33	<4.33	93.9	93.9
NDESAA25	Soil	08/27/2016	Duplicate	0.50	1.50	<11	<11	<11	72	72
NDESAA25	Soil	01/11/2017	Primary	1.50	2.50	<1.03	<1.03	<1.03	21.8	21.8
NDESAA25	Soil	01/11/2017	Primary	2.50	3.50	<0.0208	<0.0208	<0.0208	0.264	0.264
NDESAA26	Soil	08/27/2016	Primary	0.50	1.50	<1.04	<1.04	<1.04	13.1	13.1
NDESAA26	Soil	08/27/2016	Duplicate	0.50	1.50	<2.31	<2.31	<2.31	16.1	16.1
NDESAA26	Soil	01/11/2017	Primary	1.50	2.50	<0.105	<0.105	<0.105	0.812	0.812
NDESAA26	Soil	01/11/2017	Primary	2.50	3.50	<0.0204	<0.0204	<0.0204	0.0887	0.0887
NDESAA27	Soil	08/27/2016	Primary	0.50	1.50	<0.414	<0.414	<0.414	4.13	4.13
NDESAA27	Soil	01/11/2017	Primary	1.50	2.50	<0.0207	<0.0207	<0.0207	0.192	0.192
NDESAA27	Soil	01/11/2017	Primary	2.50	3.50	<0.214	<0.214	<0.214	2.43	2.43
NDESAA27	Soil	02/09/2017	Primary	3.50	4.50	<0.0216	<0.0216	<0.0216	<0.0144	ND
NDESAA27	Soil	02/09/2017	Primary	4.50	5.50	<0.0214	<0.0214	<0.0214	<0.0142	ND
NDESAA28	Soil	01/11/2017	Primary	1.00	2.00	<0.0208	<0.0208	<0.0208	0.148	0.148
NDESAA29	Soil	01/11/2017	Primary	1.00	2.00	<0.0205	<0.0205	<0.0205	0.0874	0.0874
NDESAA30	Soil	02/09/2017	Primary	1.00	2.00	<0.0203	<0.0203	<0.0203	0.0419	0.0419
NDESAB06	Soil	02/11/2016	Primary	0.00	0.25	<0.090	<0.090	<0.090	3.1	3.1
NDESAB06	Soil	04/02/2016	Primary	0.25	0.50	<0.0274	<0.0274	<0.0274	0.0507	0.0507
NDESAB07	Soil	02/11/2016	Primary	0.00	0.25	<0.11	<0.11	<0.11	0.47	0.47
NDESAB08	Soil	02/11/2016	Primary	0.00	0.25	<0.088	<0.088	<0.088	2.0	2.0
NDESAB08	Soil	04/02/2016	Primary	0.25	0.50	<0.0247	<0.0247	<0.0247	0.228	0.228
NDESAB09	Soil	02/11/2016	Primary	0.00	0.25	<0.090	<0.090	<0.090	3.0	3.0
NDESAB09	Soil	04/02/2016	Primary	0.25	0.50	<1.24	<1.24	10.1	13.8	23.9
NDESAB09	Soil	06/03/2016	Primary	0.50	1.50	<0.114	<0.114	<0.114	2.38	2.38
NDESAB09	Soil	06/03/2016	Primary	1.50	2.50	<0.116	<0.116	<0.116	1.55	1.55
NDESAB09	Soil	08/26/2016	Primary	2.50	3.50	<0.206	<0.206	<0.206	4.16	4.16
NDESAB09	Soil	08/26/2016	Primary	3.50	4.50	<0.0200	<0.0200	<0.0200	<0.0134	ND
NDESAB10	Soil	02/11/2016	Primary	0.00	0.25	<0.10	<0.10	<0.10	4.8	4.8
NDESAB10	Soil	04/02/2016	Primary	0.25	0.50	<0.121	<0.121	<0.121	1.3	1.3
NDESAB10	Soil	06/03/2016	Primary	0.50	1.50	<0.226	<0.226	<0.226	3.46	3.46
NDESAB10	Soil	06/03/2016	Primary	1.50	2.50	<0.116	<0.116	<0.116	1.88	1.88
NDESAB10	Soil	08/26/2016	Primary	2.50	3.50	<0.212	<0.212	<0.212	6.12	6.12
NDESAB10	Soil	08/26/2016	Primary	3.50	4.50	<0.0203	<0.0203	<0.0203	<0.0135	ND
NDESAB11	Soil	02/11/2016	Primary	0.00	0.25	<0.089	<0.089	<0.089	0.87	0.87
NDESAB12	Soil	02/11/2016	Primary	0.00	0.25	<0.086	<0.086	<0.086	0.64	0.64
NDESAB13	Soil	02/11/2016	Primary	0.00	0.25	<0.089	<0.089	<0.089	0.98	0.98
NDESAB14	Soil	02/11/2016	Primary	0.00	0.25	<0.090	<0.090	<0.090	4.3	4.3
NDESAB14	Soil	04/02/2016	Primary	0.25	0.50	<0.248	<0.248	<0.248	5.21	5.21
NDESAB14	Soil	06/03/2016	Primary	0.50	1.50	<0.110	<0.110	<0.110	0.957	0.957
NDESAB14	Soil	06/03/2016	Primary	1.50	2.50	<0.212	<0.212	<0.212	2.93	2.93
NDESAB14	Soil	08/26/2016	Primary	2.50	3.50	<0.102	<0.102	<0.102	1.68	1.68
NDESAB14	Soil	08/26/2016	Primary	3.50	4.50	<0.0205	<0.0205	<0.0205	<0.0136	ND
NDESAB15	Soil	02/11/2016	Primary	0.00	0.25	<0.086	<0.086	<0.086	1.5	1.5
NDESAB15	Soil	04/02/2016	Primary	0.25	0.50	<0.255	<0.255	<0.255	4.19	4.19
NDESAB15	Soil	06/03/2016	Primary	0.50	1.50	<0.0214	<0.0214	<0.0214	0.158	0.158
NDESAB15	Soil	06/03/2016	Primary	1.50	2.50	<0.0207	<0.0207	<0.0207	<0.0138	ND
NDESAB16	Soil	02/11/2016	Primary	0.00	0.25	<0.088	<0.088	<0.088	0.55	0.55
NDESAB17	Soil	02/11/2016	Primary	0.00	0.25	<0.11	<0.11	<0.11	0.20	0.20
NDESAB17	Soil	02/11/2016	Duplicate	0.00	0.25	<0.11	<0.11	<0.11	0.62	0.62

Table 1
Non-PCB Decommissioning Area Exterior Soil and Concrete Characterization Results
Florida Transformer Inc. Defuniak Springs, Florida

						PCBs (Mass Analysis)				
						Aroclor 1016 (mg/kg)	Aroclor 1242 (mg/kg)	Aroclor 1254 (mg/kg)	Aroclor 1260 (mg/kg)	Total PCBs (mg/kg)
USEPA High Occupancy Standard						NA	NA	NA	NA	1
Site ID	Sample Material	Date	Sample Type	Starting Depth (ft)	Ending Depth (ft)					
Non-PCB Decommissioning Area Exterior Soil Samples (Continued)										
NDESAB26	Soil	06/05/2016	Primary	1.00	2.00	<2.07	<2.07	<2.07	22.9	22.9
NDESAB26	Soil	01/11/2017	Primary	2.00	3.00	<0.0354	<0.0354	<0.0354	0.141	0.141
NDESAB26	Soil	01/11/2017	Primary	3.00	4.00	<0.176	<0.176	<0.176	1.59	1.59
NDESAB26	Soil	02/09/2017	Primary	4.00	5.00	<0.0206	<0.0206	<0.0206	0.391	0.391
NDESAB26	Soil	02/09/2017	Primary	5.00	6.00	<0.0208	<0.0208	<0.0208	<0.0139	ND
NDESAB27	Soil	08/27/2016	Primary	0.50	1.50	<0.109	<0.109	<0.109	1.14	1.14
NDESAB27	Soil	01/11/2017	Primary	1.50	2.50	<0.0203	<0.0203	<0.0203	0.0520	0.0520
NDESAB27	Soil	01/11/2017	Primary	2.50	3.50	<0.0208	<0.0208	<0.0208	<0.0139	ND
NDESAC23	Soil	04/03/2016	Primary	0.33	0.46	<0.0234	<0.0234	<0.0234	0.0749	0.0749
NDESAC24	Soil	04/03/2016	Primary	0.33	0.46	<0.0244	<0.0244	<0.0244	<0.0162	ND
NDESAC25	Soil	06/05/2016	Primary	0.50	1.50	<0.0207	<0.0207	<0.0207	<0.0138	ND
NDESAC25	Soil	06/05/2016	Primary	1.50	2.50	<0.0203	<0.0203	<0.0203	<0.0135	ND
NDESAC26	Soil	06/05/2016	Primary	1.00	2.00	<0.0207	<0.0207	<0.0207	0.0352	0.0352
NDESACC23	Soil	04/03/2016	Primary	0.33	0.46	<0.0234	<0.0234	<0.0234	<0.0156	ND
NDESACC24	Soil	04/03/2016	Primary	0.33	0.46	<0.0240	<0.0240	<0.0240	<0.0160	ND
NDESACC25	Soil	06/05/2016	Primary	0.50	1.50	<0.0205	<0.0205	<0.0205	0.0701	0.0701
NDESACC25	Soil	06/05/2016	Primary	1.50	2.50	<0.0201	<0.0201	<0.0201	<0.0134	ND
NDESACC26	Soil	06/05/2016	Primary	1.00	2.00	<0.0208	<0.0208	<0.0208	0.286	0.286
NDESACC27	Soil	08/27/2016	Primary	0.50	1.50	<0.114	<0.114	<0.114	2.8	2.8
NDESACC27	Soil	01/11/2017	Primary	1.50	2.50	<0.0203	<0.0203	<0.0203	<0.0135	ND
NDESACC27	Soil	01/11/2017	Primary	2.50	3.50	<0.0198	<0.0198	<0.0198	<0.0132	ND
NDESAD23	Soil	04/03/2016	Primary	0.33	0.46	<0.121	<0.121	<0.121	1.06	1.06
NDESAD23	Soil	06/05/2016	Primary	0.50	1.50	<0.0205	<0.0205	<0.0205	<0.0137	ND
NDESAD23	Soil	06/05/2016	Primary	1.50	2.50	<0.0208	<0.0208	<0.0208	<0.0139	ND
NDESAD24	Soil	04/03/2016	Primary	0.33	0.46	<0.0241	<0.0241	<0.0241	0.0862	0.0862
NDESAD25	Soil	06/05/2016	Primary	0.50	1.50	<0.0206	<0.0206	<0.0206	<0.0137	ND
NDESAD25	Soil	06/04/2016	Primary	1.50	2.50	<0.0214	<0.0214	<0.0214	<0.0143	ND
NDESAF1B	Soil	04/02/2016	Primary	15.00	16.00	<0.0229	<0.0229	<0.0229	<0.0153	ND
NDESAF20	Soil	04/01/2016	Primary	0.33	0.46	<0.0216	<0.0216	<0.0216	<0.0144	ND
NDESAG01	Soil	04/03/2016	Primary	1.00	2.00	<0.129	<0.129	<0.129	1.85	1.85
NDESAG01	Soil	08/27/2016	Primary	2.00	3.00	<2.19	<2.19	<2.19	20	20
NDESAG01	Soil	08/27/2016	Primary	3.00	4.00	<0.102	<0.102	<0.102	0.844	0.844
NDESAG02	Soil	08/27/2016	Primary	4.25	5.25	<0.0202	<0.0202	<0.0202	<0.0135	ND
NDESAG02	Soil	08/27/2016	Primary	15.00	16.00	<0.0202	<0.0202	<0.0202	<0.0135	ND
NDESAG19	Soil	04/01/2016	Primary	0.33	0.46	<0.0203	<0.0203	<0.0203	0.102	0.102
NDESAG20	Soil	04/01/2016	Primary	0.44	0.58	<0.0255	<0.0255	<0.0255	0.0321	0.0321
NDESAG22	Soil	04/01/2016	Primary	0.33	0.46	<0.0218	<0.0218	<0.0218	<0.0145	ND
NDESAH02	Soil	08/27/2016	Primary	4.25	5.25	<0.0211	<0.0211	<0.0211	<0.0140	ND
NDESAH02	Soil	08/27/2016	Primary	15.00	16.00	<0.0220	<0.0220	<0.0220	<0.0147	ND
NDESAH19	Soil	04/02/2016	Primary	0.44	0.58	<0.0219	<0.0219	<0.0219	0.0858	0.0858
NDESAH1B	Soil	04/02/2016	Primary	15.00	16.00	<0.0228	<0.0228	<0.0228	<0.0152	ND
NDESAH20	Soil	04/01/2016	Primary	0.44	0.58	<0.0207	<0.0207	<0.0207	<0.0138	ND
NDESAH21	Soil	04/01/2016	Primary	0.33	0.46	<0.0210	<0.0210	<0.0210	<0.0140	ND
NDESA102	Soil	08/27/2016	Primary	4.25	5.25	<0.0208	<0.0208	<0.0208	0.322	0.322
NDESB04	Soil	03/30/2017	Primary	1.00	2.00	<0.0209	<0.0209	<0.0209	<0.0139	<0.00695
NDESB05	Soil	03/29/2017	Primary	0.00	1.00	<0.0477	<0.0477	<0.0477	0.747	0.747
NDESB05	Soil	03/29/2017	Primary	1.00	2.00	<0.103	<0.103	<0.103	1.36	1.36
NDESB06	Soil	02/09/2017	Primary	0.00	1.00	<0.0210	<0.0210	<0.0210	0.21	0.21
NDESB06	Soil	02/09/2017	Primary	1.00	2.00	<0.220	<0.220	<0.220	3.34	3.34
NDESB06	Soil	03/30/2017	Primary	2.00	3.00	<0.0201	<0.0201	<0.0201	0.312	0.312
NDESB06	Soil	03/30/2017	Primary	3.00	4.00	<0.0407	<0.0407	<0.0407	0.764	0.764
NDESB07	Soil	08/26/2016	Primary	0.00	1.00	<0.0222	<0.0222	<0.0222	0.25	0.25
NDESB07	Soil	08/26/2016	Primary	1.00	2.00	<0.101	<0.101	<0.101	1.61	1.61
NDESB07	Soil	02/09/2017	Primary	2.00	3.00	<0.0205	<0.0205	<0.0205	<0.0137	ND
NDESB07	Soil	02/09/2017	Duplicate	2.00	3.00	<0.0208	<0.0208	<0.0208	<0.0138	ND
NDESB07	Soil	02/09/2017	Primary	3.00	4.00	<0.0200	<0.0200	<0.0200	<0.0133	ND
NDESB08	Soil	06/03/2016	Primary	0.00	1.00	<0.109	<0.109	<0.109	2.42	2.42
NDESB08	Soil	06/03/2016	Primary	1.00	2.00	<0.0212	<0.0212	<0.0212	0.297	0.297
NDESB09	Soil	06/03/2016	Primary	0.00	1.00	<0.0204	<0.0204	<0.0204	0.324	0.324
NDESB09	Soil	06/03/2016	Primary	1.00	2.00	<0.0224	<0.0224	<0.0224	0.378	0.378
NDESB10	Soil	06/03/2016	Primary	0.00	1.00	<0.0214	<0.0214	<0.0214	0.501	0.501
NDESB10	Soil	06/03/2016	Primary	1.00	2.00	<0.0216	<0.0216	<0.0216	0.0387	0.0387
NDESB11	Soil	06/03/2016	Primary	0.00	1.00	<0.206	<0.206	<0.206	3.64	3.64
NDESB11	Soil	06/03/2016	Primary	1.00	2.00	<0.0210	<0.0210	<0.0210	<0.0140	ND
NDESB12	Soil	06/03/2016	Primary	0.00	1.00	<0.207	<0.207	<0.207	4.28	4.28
NDESB12	Soil	06/03/2016	Primary	1.00	2.00	<0.0215	<0.0215	<0.0215	<0.0143	ND
NDESB13	Soil	06/03/2016	Primary	0.00	1.00	<0.0980	<0.0980	<0.0980	2.47	2.47
NDESB13	Soil	06/03/2016	Primary	1.00	2.00	<0.0209	<0.0209	<0.0209	0.0742	0.0742
NDESB14	Soil	06/03/2016	Primary	0.00	1.00	<0.0212	<0.0212	<0.0212	0.383	0.383
NDESB14	Soil	06/03/2016	Primary	1.00	2.00	<0.0205	<0.0205	<0.0205	0.0470	0.0470
NDESB15	Soil	06/03/2016	Primary	0.00	1.00	<0.0402	<0.0402	<0.0402	1.14	1.14
NDESB15	Soil	06/03/2016	Primary	1.00	2.00	<0.0408	<0.0408	<0.0408	0.95	0.95
NDESB16	Soil	06/03/2016	Primary	0.00	1.00	<0.103	<0.103	<0.103	2.17	2.17
NDESB16	Soil	06/03/2016	Primary	1.00	2.00	<0.0988	<0.0988	<0.0988	1.82	1.82
NDESB16	Soil	08/26/2016	Primary	2.00	3.00	<0.101	<0.101	<0.101	3.09	3.09
NDESB16	Soil	08/26/2016	Primary	3.00	4.00	<0.0197	<0.0197	<0.0197	0.0157	0.0157

Table 1
Non-PCB Decommissioning Area Exterior Soil and Concrete Characterization Results
Florida Transformer Inc. Defuniak Springs, Florida

						PCBs (Mass Analysis)				
						Aroclor 1016	Aroclor 1242	Aroclor 1254	Aroclor 1260	Total PCBs
						(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)
USEPA High Occupancy Standard						NA	NA	NA	NA	1
Site ID	Sample Material	Date	Sample Type	Starting Depth (ft)	Ending Depth (ft)					
Non-PCB Decommissioning Area Exterior Soil Samples (Continued)										
NDESB17	Soil	08/26/2016	Primary	0.00	1.00	<0.0231	<0.0231	<0.0231	0.465	0.465
NDESB17	Soil	08/26/2016	Primary	1.00	2.00	<0.402	<0.402	<0.402	17.4	17.4
NDESB17	Soil	02/09/2017	Primary	2.00	3.00	<0.0199	<0.0199	<0.0199	0.095	0.095
NDESB17	Soil	02/09/2017	Primary	3.00	4.00	<0.0200	<0.0200	<0.0200	<0.0133	ND
NDESB25	Soil	01/11/2017	Primary	0.00	1.00	<0.212	<0.212	<0.212	3.8	3.8
NDESB25	Soil	01/11/2017	Primary	1.00	2.00	<0.00100	<0.00100	<0.00100	2.66	2.66
NDESB25	Soil	02/09/2017	Primary	2.00	3.00	<0.0210	<0.0210	<0.0210	0.181	0.181
NDESB25	Soil	02/09/2017	Primary	3.00	4.00	<0.0215	<0.0215	<0.0215	0.0574	0.0574
NDESB26	Soil	01/11/2017	Primary	0.00	1.00	<0.0207	<0.0207	<0.0207	0.503	0.503
NDESB27	Soil	01/11/2017	Primary	0.00	1.00	<0.430	<0.430	<0.430	8.6	8.6
NDESB27	Soil	01/11/2017	Primary	1.00	2.00	<0.00100	<0.00100	<0.00100	0.618	0.618
NDESB28	Soil	01/11/2017	Primary	0.00	1.00	<0.405	<0.405	<0.405	5.74	5.74
NDESB28	Soil	01/11/2017	Primary	1.00	2.00	<0.00100	<0.00100	<0.00100	1.26	1.26
NDESB28	Soil	02/09/2017	Primary	2.00	3.00	<0.208	<0.208	<0.208	4.64	4.64
NDESB28	Soil	02/09/2017	Primary	3.00	4.00	<0.0212	<0.0212	<0.0212	0.0576	0.0576
NDESB29	Soil	01/11/2017	Primary	0.00	1.00	<0.424	<0.424	<0.424	4.92	4.92
NDESB29	Soil	01/11/2017	Primary	1.00	2.00	<0.204	<0.204	<0.204	3.15	3.15
NDESB29	Soil	02/09/2017	Primary	2.00	3.00	<0.104	<0.104	<0.104	1.13	1.13
NDESB29	Soil	02/09/2017	Primary	3.00	4.00	<0.0216	<0.0216	<0.0216	0.204	0.204
NDESB30	Soil	02/09/2017	Primary	0.00	1.00	<0.412	<0.412	<0.412	5.93	5.93
NDESB30	Soil	02/09/2017	Primary	1.00	2.00	<0.210	<0.210	<0.210	2.08	2.08
NDESB30	Soil	03/30/2017	Primary	2.00	3.00	<0.0205	<0.0205	<0.0205	0.201	0.201
NDESB30	Soil	03/30/2017	Primary	3.00	4.00	<0.0201	<0.0201	<0.0201	0.0259	0.0259
NDESB31	Soil	03/29/2017	Primary	0.00	1.00	<0.102	<0.102	<0.102	1.65	1.65
NDESB31	Soil	03/30/2017	Primary	1.00	2.00	<0.0199	<0.0199	<0.0199	0.4	0.4
NDESB32	Soil	03/29/2017	Primary	0.00	1.00	<0.109	<0.109	<0.109	1.01	1.01
NDESB32	Soil	03/30/2017	Primary	1.00	2.00	<0.0202	<0.0202	<0.0202	0.0362	0.0362
NDESB33	Soil	03/29/2017	Primary	0.00	1.00	<0.0426	<0.0426	<0.0426	0.45	0.45
NDESB33	Soil	03/30/2017	Primary	1.00	2.00	<0.0202	<0.0202	<0.0202	0.212	0.212
NDESC04	Soil	03/30/2017	Primary	1.00	2.00	<0.0201	<0.0201	<0.0201	<0.0134	<0.00671
NDESC05	Soil	03/29/2017	Primary	0.00	1.00	<0.0201	<0.0201	<0.0201	0.232	0.232
NDESC05	Soil	03/29/2017	Primary	1.00	2.00	<0.0205	<0.0205	<0.0205	0.0875	0.0875
NDESC06	Soil	02/09/2017	Primary	0.00	1.00	<0.0203	<0.0203	<0.0203	0.136	0.136
NDESC06	Soil	02/09/2017	Duplicate	0.00	1.00	<0.0204	<0.0204	<0.0204	0.146	0.146
NDESC06	Soil	02/09/2017	Primary	1.00	2.00	<0.0199	<0.0199	<0.0199	0.416	0.416
NDESC07	Soil	08/26/2016	Primary	0.00	1.00	<0.0239	<0.0239	<0.0239	0.365	0.365
NDESC07	Soil	08/26/2016	Primary	1.00	2.00	<0.0257	<0.0257	<0.0257	<0.0172	ND
NDESC08	Soil	08/26/2016	Primary	0.00	1.00	<0.0424	<0.0424	<0.0424	0.607	0.607
NDESC08	Soil	08/26/2016	Primary	1.00	2.00	<0.0251	<0.0251	<0.0251	<0.0168	ND
NDESC09	Soil	08/26/2016	Primary	0.00	1.00	<0.180	<0.180	<0.180	2.08	2.08
NDESC09	Soil	08/26/2016	Primary	1.00	2.00	<0.0249	<0.0249	<0.0249	<0.0166	ND
NDESC10	Soil	08/26/2016	Primary	0.00	1.00	<0.0361	<0.0361	<0.0361	0.542	0.542
NDESC10	Soil	08/26/2016	Primary	1.00	2.00	<0.0257	<0.0257	<0.0257	0.0343	0.0343
NDESC11	Soil	08/26/2016	Primary	0.00	1.00	<0.156	<0.156	<0.156	1.79	1.79
NDESC11	Soil	08/26/2016	Primary	1.00	2.00	<0.0237	<0.0237	<0.0237	0.0188	0.0188
NDESC12	Soil	08/26/2016	Primary	0.00	1.00	<0.137	<0.137	<0.137	2.6	2.6
NDESC12	Soil	08/26/2016	Primary	1.00	2.00	<0.0256	<0.0256	<0.0256	0.0601	0.0601
NDESC13	Soil	08/26/2016	Primary	0.00	1.00	<0.0459	<0.0459	<0.0459	0.922	0.922
NDESC13	Soil	08/26/2016	Primary	1.00	2.00	<0.0237	<0.0237	<0.0237	<0.0158	ND
NDESC14	Soil	08/26/2016	Primary	0.00	1.00	<0.126	<0.126	<0.126	0.862	0.862
NDESC14	Soil	08/26/2016	Primary	1.00	2.00	<0.0239	<0.0239	<0.0239	<0.0159	ND
NDESC15	Soil	08/26/2016	Primary	0.00	1.00	<0.362	<0.362	<0.362	5.47	5.47
NDESC15	Soil	08/26/2016	Primary	1.00	2.00	<0.128	<0.128	<0.128	2.31	2.31
NDESC15	Soil	01/12/2017	Primary	2.00	3.00	<0.0196	<0.0196	<0.0196	<0.0131	ND
NDESC15	Soil	01/12/2017	Primary	3.00	4.00	<0.0199	<0.0199	<0.0199	<0.0133	ND
NDESC16	Soil	08/26/2016	Primary	0.00	1.00	<0.244	<0.244	<0.244	5.46	5.46
NDESC16	Soil	08/26/2016	Primary	1.00	2.00	<0.0214	<0.0214	<0.0214	0.384	0.384
NDESC17	Soil	08/26/2016	Primary	0.00	1.00	<0.223	<0.223	<0.223	5.8	5.8
NDESC17	Soil	08/26/2016	Primary	1.00	2.00	<0.0200	<0.0200	<0.0200	0.146	0.146
NDESC18	Soil	01/11/2017	Primary	0.00	1.00	<0.0208	<0.0208	<0.0208	0.196	0.196
NDESC18	Soil	01/11/2017	Primary	1.00	2.00	<0.00100	<0.00100	<0.00100	0.688	0.688
NDESC19	Soil	01/11/2017	Primary	0.00	1.00	<0.103	<0.103	<0.103	1.26	1.26
NDESC19	Soil	01/11/2017	Primary	1.00	2.00	<0.0204	<0.0204	<0.0204	0.0896	0.0896
NDESC22	Soil	03/29/2017	Primary	0.00	1.00	<0.0205	<0.0205	<0.0205	0.138	0.138
NDESC22	Soil	03/30/2017	Primary	1.00	2.00	<0.0208	<0.0208	<0.0208	0.246	0.246
NDESC23	Soil	03/29/2017	Primary	0.00	1.00	<0.0242	<0.0242	<0.0242	0.467	0.467
NDESC23	Soil	03/30/2017	Primary	1.00	2.00	<0.0198	<0.0198	<0.0198	0.422	0.422
NDESC23	Soil	03/30/2017	Duplicate	1.00	2.00	<0.0206	<0.0206	<0.0206	0.238	0.238
NDESC24	Soil	02/09/2017	Primary	0.00	1.00	<0.105	<0.105	<0.105	1.49	1.49
NDESC24	Soil	02/09/2017	Primary	1.00	2.00	<0.204	<0.204	<0.204	2.84	2.84
NDESC24	Soil	03/30/2017	Primary	2.00	3.00	<0.0207	<0.0207	<0.0207	0.142	0.142
NDESC24	Soil	03/30/2017	Duplicate	2.00	3.00	<0.0207	<0.0207	<0.0207	0.133	0.133
NDESC24	Soil	03/30/2017	Primary	3.00	4.00	<0.0205	<0.0205	<0.0205	0.0322	0.0322
NDESC25	Soil	02/09/2017	Primary	0.00	1.00	<0.450	<0.450	<0.450	6.41	6.41
NDESC25	Soil	02/09/2017	Primary	1.00	2.00	<0.202	<0.202	<0.202	3.1	3.1
NDESC25	Soil	03/30/2017	Primary	2.00	3.00	<0.0199	<0.0199	<0.0199	0.0273	0.0273
NDESC25	Soil	03/30/2017	Primary	3.00	4.00	<0.0201	<0.0201	<0.0201	0.0244	0.0244
NDESC25	Soil	03/30/2017	Duplicate	3.00	4.00	<0.0206	<0.0206	<0.0206	0.0199	0.0199

Table 1
Non-PCB Decommissioning Area Exterior Soil and Concrete Characterization Results
Florida Transformer Inc. Defuniak Springs, Florida

						PCBs (Mass Analysis)				
						Aroclor 1016 (mg/kg)	Aroclor 1242 (mg/kg)	Aroclor 1254 (mg/kg)	Aroclor 1260 (mg/kg)	Total PCBs (mg/kg)
USEPA High Occupancy Standard						NA	NA	NA	NA	1
Site ID	Sample Material	Date	Sample Type	Starting Depth (ft)	Ending Depth (ft)					
Non-PCB Decommissioning Area Exterior Soil Samples (Continued)										
NDESC26	Soil	02/09/2017	Primary	0.00	1.00	<0.208	<0.208	<0.208	2.49	2.49
NDESC26	Soil	02/09/2017	Primary	1.00	2.00	<1.06	<1.06	<1.06	21.7	21.7
NDESC26	Soil	03/30/2017	Primary	2.00	3.00	<0.0200	<0.0200	<0.0200	0.0383	0.0383
NDESC26	Soil	03/30/2017	Primary	3.00	4.00	<0.0201	<0.0201	<0.0201	<0.0134	<0.00671
NDESC27	Soil	02/09/2017	Primary	0.00	1.00	<0.212	<0.212	<0.212	2.26	2.26
NDESC27	Soil	02/09/2017	Primary	1.00	2.00	<0.407	<0.407	<0.407	6.8	6.8
NDESC27	Soil	03/30/2017	Primary	2.00	3.00	<0.100	<0.100	<0.100	0.533	0.533
NDESC27	Soil	03/30/2017	Primary	3.00	4.00	<0.0200	<0.0200	<0.0200	0.0771	0.0771
NDESC28	Soil	02/09/2017	Primary	0.00	1.00	<0.437	<0.437	<0.437	5.86	5.86
NDESC28	Soil	02/09/2017	Primary	1.00	2.00	<0.205	<0.205	<0.205	2.72	2.72
NDESC28	Soil	03/30/2017	Primary	2.00	3.00	<0.0204	<0.0204	<0.0204	0.0455	0.0455
NDESC28	Soil	03/30/2017	Primary	3.00	4.00	<0.0201	<0.0201	<0.0201	0.0195	0.0195
NDESC29	Soil	02/09/2017	Primary	0.00	1.00	<0.508	<0.508	<0.508	6.97	6.97
NDESC29	Soil	02/09/2017	Primary	1.00	2.00	<0.422	<0.422	<0.422	6.53	6.53
NDESC29	Soil	03/30/2017	Primary	2.00	3.00	<0.0206	<0.0206	<0.0206	0.122	0.122
NDESC29	Soil	03/30/2017	Primary	3.00	4.00	<0.0210	<0.0210	<0.0210	0.0693	0.0693
NDESC30	Soil	02/09/2017	Primary	0.00	1.00	<0.209	<0.209	<0.209	2.99	2.99
NDESC30	Soil	02/09/2017	Primary	1.00	2.00	<0.101	<0.101	<0.101	1.46	1.46
NDESC30	Soil	03/30/2017	Primary	2.00	3.00	<0.0202	<0.0202	<0.0202	0.0594	0.0594
NDESC30	Soil	03/30/2017	Primary	3.00	4.00	<0.0202	<0.0202	<0.0202	0.0318	0.0318
NDESC31	Soil	03/29/2017	Primary	0.00	1.00	<0.105	<0.105	<0.105	1.02	1.02
NDESC31	Soil	03/30/2017	Primary	1.00	2.00	<0.0195	<0.0195	<0.0195	0.404	0.404
NDESC32	Soil	03/29/2017	Primary	0.00	1.00	<0.0205	<0.0205	<0.0205	0.517	0.517
NDESC32	Soil	03/30/2017	Primary	1.00	2.00	<0.0204	<0.0204	<0.0204	0.225	0.225
NDESC33	Soil	03/29/2017	Primary	0.00	1.00	<0.0211	<0.0211	<0.0211	0.223	0.223
NDESC33	Soil	03/30/2017	Primary	1.00	2.00	<0.0199	<0.0199	<0.0199	0.386	0.386
NDESD08	Soil	01/12/2017	Primary	0.00	1.00	<0.0216	<0.0216	<0.0216	0.0386	0.0386
NDESD09	Soil	01/12/2017	Primary	0.00	1.00	<0.0218	<0.0218	<0.0218	0.0238	0.0238
NDESD10	Soil	01/12/2017	Primary	0.00	1.00	<0.0208	<0.0208	<0.0208	0.0372	0.0372
NDESD11	Soil	01/12/2017	Primary	0.00	1.00	<0.0207	<0.0207	<0.0207	0.0380	0.0380
NDESD12	Soil	01/12/2017	Primary	0.00	1.00	<0.0208	<0.0208	<0.0208	0.0522	0.0522
NDESD13	Soil	01/12/2017	Primary	0.00	1.00	<0.0214	<0.0214	<0.0214	0.216	0.216
NDESD13	Soil	01/12/2017	Primary	1.00	2.00	<0.0206	<0.0206	<0.0206	0.0220	0.0220
NDESD14	Soil	01/12/2017	Primary	0.00	1.00	<0.0217	<0.0217	<0.0217	0.12	0.12
NDESD14	Soil	01/12/2017	Primary	1.00	2.00	<0.0203	<0.0203	<0.0203	<0.0135	ND
NDESD15	Soil	01/12/2017	Primary	0.00	1.00	<0.0212	<0.0212	<0.0212	0.118	0.118
NDESD15	Soil	01/12/2017	Primary	1.00	2.00	<0.0206	<0.0206	<0.0206	<0.0137	ND
NDESD16	Soil	08/27/2016	Primary	0.00	1.00	<0.319	<0.319	<0.319	5.86	5.86
NDESD16	Soil	01/12/2017	Primary	2.00	3.00	<0.0201	<0.0201	<0.0201	<0.0134	ND
NDESD17	Soil	08/27/2016	Primary	0.00	1.00	<0.352	<0.352	<0.352	6.18	6.18
NDESD17	Soil	01/12/2017	Primary	2.00	3.00	<0.0202	<0.0202	<0.0202	0.0273	0.0273
NDESD18	Soil	01/11/2017	Primary	0.00	1.00	<0.0220	<0.0220	<0.0220	0.23	0.23
NDESD19	Soil	01/11/2017	Primary	0.00	1.00	<1.03	<1.03	<1.03	19.7	19.7
NDESD19	Soil	01/12/2017	Primary	1.00	2.00	<0.0201	<0.0201	<0.0201	<0.00100	ND
NDESD21	Soil	03/29/2017	Primary	0.00	1.00	<0.202	<0.202	<0.202	3	3
NDESD21	Soil	03/30/2017	Primary	1.00	2.00	<0.0250	<0.0250	<0.0250	<0.0167	<0.00835
NDESD21	Soil	03/30/2017	Duplicate	1.00	2.00	<0.0251	<0.0251	<0.0251	0.0914P	0.0914
NDESD22	Soil	03/29/2017	Primary	0.00	1.00	<1.12	<1.12	<1.12	10.5	10.5
NDESD22	Soil	03/30/2017	Primary	1.00	2.00	<0.0245	<0.0245	<0.0245	0.0573	0.0573
NDESD23	Soil	03/29/2017	Primary	0.00	1.00	<0.103	<0.103	<0.103	1.19	1.19
NDESD23	Soil	03/30/2017	Primary	1.00	2.00	<0.0235	<0.0235	<0.0235	0.197	0.197
NDESD24	Soil	03/29/2017	Primary	0.00	1.00	<0.101	<0.101	<0.101	1.59	1.59
NDESD24	Soil	03/30/2017	Primary	1.00	2.00	<0.0247	<0.0247	<0.0247	0.289	0.289
NDESD25	Soil	03/29/2017	Primary	0.00	1.00	<0.102	<0.102	<0.102	0.683	0.683
NDESD25	Soil	03/30/2017	Primary	1.00	2.00	<0.0255	<0.0255	<0.0255	0.267	0.267
NDESD26	Soil	03/29/2017	Primary	0.00	1.00	<0.120	<0.120	<0.120	1.68	1.68
NDESD26	Soil	03/30/2017	Primary	1.00	2.00	<0.0246	<0.0246	<0.0246	0.144	0.144
NDESD27	Soil	03/29/2017	Primary	0.00	1.00	<0.224	<0.224	<0.224	4.87	4.87
NDESD27	Soil	03/30/2017	Primary	1.00	2.00	<0.0244	<0.0244	<0.0244	0.28	0.28
NDESD28	Soil	03/29/2017	Primary	0.00	1.00	<0.238	<0.238	<0.238	2.24	2.24
NDESD28	Soil	03/30/2017	Primary	1.00	2.00	<0.122	<0.122	<0.122	1.99	1.99
NDESD28	Soil	03/30/2017	Duplicate	1.00	2.00	<0.125	<0.125	<0.125	0.946	0.946
NDESD29	Soil	03/29/2017	Primary	0.00	1.00	<1.08	<1.08	<1.08	18.4	18.4
NDESD29	Soil	03/30/2017	Primary	1.00	2.00	<0.0245	<0.0245	<0.0245	0.327	0.327
NDESD30	Soil	03/29/2017	Primary	0.00	1.00	<0.207	<0.207	<0.207	2.44	2.44
NDESD30	Soil	03/30/2017	Primary	1.00	2.00	<0.123	<0.123	<0.123	2.32	2.32
NDESD31	Soil	03/29/2017	Primary	0.00	1.00	<0.102	<0.102	<0.102	0.755	0.755
NDESD31	Soil	03/30/2017	Primary	1.00	2.00	<0.0248	<0.0248	<0.0248	0.34	0.34
NDESD32	Soil	03/29/2017	Primary	0.00	1.00	<0.0207	<0.0207	<0.0207	0.462	0.462
NDESD32	Soil	03/30/2017	Primary	1.00	2.00	<0.0247	<0.0247	<0.0247	0.139	0.139
NDESD32	Soil	03/30/2017	Duplicate	1.00	2.00	<0.0248	<0.0248	<0.0248	0.156	0.156
NDESD33	Soil	03/29/2017	Primary	0.00	1.00	<0.0194	<0.0194	<0.0194	0.4	0.4
NDESD33	Soil	03/30/2017	Primary	1.00	2.00	<0.0246	<0.0246	<0.0246	0.0451	0.0451
NDESE08	Soil	01/11/2017	Primary	0.00	1.00	<0.0210	<0.0210	<0.0210	0.0402	0.0402
NDESE09	Soil	01/11/2017	Primary	0.00	1.00	<0.0218	<0.0218	<0.0218	0.0388	0.0388
NDESE10	Soil	01/11/2017	Primary	0.00	1.00	<0.0216	<0.0216	<0.0216	0.0366	0.0366
NDESE11	Soil	01/11/2017	Primary	0.00	1.00	<0.0228	<0.0228	<0.0228	0.114	0.114
NDESE12	Soil	01/11/2017	Primary	0.00	1.00	<0.0209	<0.0209	<0.0209	0.0613	0.0613

Table 1
Non-PCB Decommissioning Area Exterior Soil and Concrete Characterization Results
Florida Transformer Inc. Defuniak Springs, Florida

						PCBs (Mass Analysis)				
						Aroclor 1016 (mg/kg)	Aroclor 1242 (mg/kg)	Aroclor 1254 (mg/kg)	Aroclor 1260 (mg/kg)	Total PCBs (mg/kg)
USEPA High Occupancy Standard						NA	NA	NA	NA	1
Site ID	Sample Material	Date	Sample Type	Starting Depth (ft)	Ending Depth (ft)					
Non-PCB Decommissioning Area Exterior Soil Samples (Continued)										
NDESE13	Soil	01/11/2017	Primary	0.00	1.00	<0.0216	<0.0216	<0.0216	0.331	0.331
NDESE13	Soil	01/12/2017	Primary	1.00	2.00	<0.0209	<0.0209	<0.0209	<0.0139	ND
NDESE14	Soil	01/11/2017	Primary	0.00	1.00	<1.06	<1.06	<1.06	14.4	14.4
NDESE14	Soil	02/09/2017	Primary	0.00	1.00	<1.04	<1.04	<1.04	10.2	10.2
NDESE14	Soil	01/12/2017	Primary	1.00	2.00	<0.0205	<0.0205	<0.0205	0.314	0.314
NDESE15	Soil	01/11/2017	Primary	0.00	1.00	<0.0207	<0.0207	<0.0207	0.28	0.28
NDESE15	Soil	01/12/2017	Primary	1.00	2.00	<0.0207	<0.0207	<0.0207	0.0142	0.0142
NDESE16	Soil	01/11/2017	Primary	0.00	1.00	<0.0202	<0.0202	<0.0202	0.0522	0.0522
NDESE16	Soil	01/12/2017	Primary	1.00	2.00	<0.00100	<0.00100	<0.00100	<0.00100	ND
NDESE17	Soil	01/11/2017	Primary	0.00	1.00	<0.0220	<0.0220	<0.0220	0.211	0.211
NDESE17	Soil	01/12/2017	Primary	1.00	2.00	<0.00100	<0.00100	<0.00100	<0.00100	ND
NDESE18	Soil	01/11/2017	Primary	0.00	1.00	<0.0222	<0.0222	<0.0222	0.28	0.28
NDESE18	Soil	01/12/2017	Primary	1.00	2.00	<0.0201	<0.0201	<0.0201	<0.00100	ND
NDESE21	Soil	03/29/2017	Primary	0.00	1.00	<0.102	<0.102	<0.102	0.941	0.941
NDESE21	Soil	03/30/2017	Primary	1.00	2.00	<0.0245	<0.0245	<0.0245	0.0179	0.0179
NDESE22	Soil	03/29/2017	Primary	0.00	1.00	<0.0981	<0.0981	<0.0981	0.595	0.595
NDESE22	Soil	03/30/2017	Primary	1.00	2.00	<0.0236	<0.0236	<0.0236	0.0368	0.0368
NDESE23	Soil	03/29/2017	Primary	0.00	1.00	<0.0404	<0.0404	<0.0404	0.587	0.587
NDESE23	Soil	03/30/2017	Primary	1.00	2.00	<0.0224	<0.0224	<0.0224	0.119	0.119
NDESE24	Soil	03/29/2017	Primary	0.00	1.00	<0.0985	<0.0985	<0.0985	0.704	0.704
NDESE24	Soil	03/30/2017	Primary	1.00	2.00	<0.0245	<0.0245	<0.0245	0.0857	0.0857
NDESE25	Soil	03/29/2017	Primary	0.00	1.00	<0.102	<0.102	<0.102	1	1
NDESE25	Soil	03/30/2017	Primary	1.00	2.00	<0.0231	<0.0231	<0.0231	0.125	0.125
NDESE26	Soil	03/29/2017	Primary	0.00	1.00	<0.0385	<0.0385	<0.0385	0.581	0.581
NDESE26	Soil	03/30/2017	Primary	1.00	2.00	<0.0245	<0.0245	<0.0245	0.106	0.106
NDESE27	Soil	03/29/2017	Primary	0.00	1.00	<0.109	<0.109	<0.109	1.29	1.29
NDESE27	Soil	03/30/2017	Primary	1.00	2.00	<0.0241	<0.0241	<0.0241	0.262	0.262
NDESE28	Soil	03/29/2017	Primary	0.00	1.00	<0.242	<0.242	<0.242	3.29	3.29
NDESE28	Soil	03/30/2017	Primary	1.00	2.00	<0.0226	<0.0226	<0.0226	0.394	0.394
NDESE29	Soil	03/29/2017	Primary	0.00	1.00	<0.109	<0.109	<0.109	1.28	1.28
NDESE29	Soil	03/30/2017	Primary	1.00	2.00	<0.0204	<0.0204	<0.0204	0.383	0.383
NDESE30	Soil	03/29/2017	Primary	0.00	1.00	<0.107	<0.107	<0.107	1.4	1.4
NDESE30	Soil	03/30/2017	Primary	1.00	2.00	<0.204	<0.204	<0.204	3.01	3.01
NDESE31	Soil	03/29/2017	Primary	0.00	1.00	<0.102	<0.102	<0.102	0.756	0.756
NDESE31	Soil	03/30/2017	Primary	1.00	2.00	<0.0406	<0.0406	<0.0406	0.667	0.667
NDESE32	Soil	03/29/2017	Primary	0.00	1.00	<0.0210	<0.0210	<0.0210	0.493	0.493
NDESE32	Soil	03/30/2017	Primary	1.00	2.00	<0.0202	<0.0202	<0.0202	<0.00134	<0.00672
NDESE33	Soil	03/29/2017	Primary	0.00	1.00	<0.0203	<0.0203	<0.0203	0.356	0.356
NDESE33	Soil	03/30/2017	Primary	1.00	2.00	<0.0201	<0.0201	<0.0201	<0.00134	<0.00669
NDESF08	Soil	01/11/2017	Primary	0.00	1.00	<0.0215	<0.0215	<0.0215	0.0415	0.0415
NDESF09	Soil	01/11/2017	Primary	0.00	1.00	<0.0205	<0.0205	<0.0205	0.0548	0.0548
NDESF10	Soil	01/11/2017	Primary	0.00	1.00	<0.0210	<0.0210	<0.0210	0.0772	0.0772
NDESF11	Soil	01/11/2017	Primary	0.00	1.00	<0.0214	<0.0214	<0.0214	0.0557	0.0557
NDESF12	Soil	01/11/2017	Primary	0.00	1.00	<0.0221	<0.0221	<0.0221	0.104	0.104
NDESF13	Soil	01/11/2017	Primary	0.00	1.00	<0.0225	<0.0225	<0.0225	0.17	0.17
NDESF13	Soil	01/12/2017	Primary	1.00	2.00	<0.0204	<0.0204	<0.0204	<0.0136	ND
NDESF14	Soil	01/11/2017	Primary	0.00	1.00	<0.0207	<0.0207	<0.0207	0.211	0.211
NDESF14	Soil	01/11/2017	Duplicate	0.00	1.00	<0.0206	<0.0206	<0.0206	0.183	0.183
NDESF14	Soil	01/12/2017	Primary	1.00	2.00	<0.0202	<0.0202	<0.0202	0.0173	0.0173
NDESF15	Soil	01/11/2017	Primary	0.00	1.00	<0.104	<0.104	<0.104	1.3	1.3
NDESF15	Soil	01/11/2017	Duplicate	0.00	1.00	<0.0418	<0.0418	<0.0418	0.99	0.99
NDESF15	Soil	02/09/2017	Primary	0.00	1.00	<0.0204	<0.0204	<0.0204	0.18	0.18
NDESF15	Soil	01/12/2017	Primary	1.00	2.00	<0.00100	<0.00100	<0.00100	<0.00100	ND
NDESF16	Soil	01/11/2017	Primary	0.00	1.00	<0.0214	<0.0214	<0.0214	0.403	0.403
NDESF16	Soil	01/12/2017	Primary	1.00	2.00	<0.0209	<0.0209	<0.0209	0.0225	0.0225
NDESF17	Soil	01/11/2017	Primary	0.00	1.00	<0.0205	<0.0205	<0.0205	0.325	0.325
NDESF18	Soil	01/11/2017	Primary	0.00	1.00	<0.0219	<0.0219	<0.0219	0.232	0.232
NDESF21	Soil	03/29/2017	Primary	0.00	1.00	<0.0962	<0.0962	<0.0962	1.6	1.6
NDESF21	Soil	03/30/2017	Primary	1.00	2.00	<0.0203	<0.0203	<0.0203	0.261	0.261
NDESF22	Soil	03/29/2017	Primary	0.00	1.00	<0.0270	<0.0270	<0.0270	0.566	0.566
NDESF22	Soil	03/30/2017	Primary	1.00	2.00	<0.0196	<0.0196	<0.0196	0.0329	0.0329
NDESF23	Soil	03/29/2017	Primary	0.00	1.00	<0.0979	<0.0979	<0.0979	1.34	1.34
NDESF23	Soil	03/30/2017	Primary	1.00	2.00	<0.0205	<0.0205	<0.0205	0.0168	0.0168
NDESF24	Soil	03/29/2017	Primary	0.00	1.00	<0.0410	<0.0410	<0.0410	0.65	0.65
NDESF24	Soil	03/30/2017	Primary	1.00	2.00	<0.0201	<0.0201	<0.0201	0.0150	0.0150
NDESF25	Soil	03/29/2017	Primary	0.00	1.00	<0.103	<0.103	<0.103	0.928	0.928
NDESF25	Soil	03/30/2017	Primary	1.00	2.00	<0.0205	<0.0205	<0.0205	0.0513	0.0513
NDESF26	Soil	03/29/2017	Primary	0.00	1.00	<1.06	<1.06	<1.06	13.4	13.4
NDESF26	Soil	03/30/2017	Primary	1.00	2.00	<0.0205	<0.0205	<0.0205	0.126	0.126
NDESF26	Soil	03/30/2017	Duplicate	1.00	2.00	<0.0202	<0.0202	<0.0202	0.197	0.197
NDESF27	Soil	03/29/2017	Primary	0.00	1.00	<0.206	<0.206	<0.206	2.84	2.84
NDESF27	Soil	03/30/2017	Primary	1.00	2.00	<0.104	<0.104	<0.104	1.23	1.23
NDESF28	Soil	03/29/2017	Primary	0.00	1.00	<0.102	<0.102	<0.102	1.9	1.9
NDESF28	Soil	03/30/2017	Primary	1.00	2.00	<0.0207	<0.0207	<0.0207	0.235	0.235
NDESF29	Soil	03/29/2017	Primary	0.00	1.00	<0.104	<0.104	<0.104	1.22	1.22
NDESF29	Soil	03/30/2017	Primary	1.00	2.00	<0.103	<0.103	<0.103	1.47	1.47
NDESF30	Soil	03/29/2017	Primary	0.00	1.00	<0.106	<0.106	<0.106	0.765	0.765
NDESF30	Soil	03/30/2017	Primary	1.00	2.00	<0.0205	<0.0205	<0.0205	0.315	0.315

Table 1
Non-PCB Decommissioning Area Exterior Soil and Concrete Characterization Results
Florida Transformer Inc. Defuniak Springs, Florida

						PCBs (Mass Analysis)				
						Aroclor 1016 (mg/kg)	Aroclor 1242 (mg/kg)	Aroclor 1254 (mg/kg)	Aroclor 1260 (mg/kg)	Total PCBs (mg/kg)
USEPA High Occupancy Standard						NA	NA	NA	NA	1
Site ID	Sample Material	Date	Sample Type	Starting Depth (ft)	Ending Depth (ft)					
Non-PCB Decommissioning Area Exterior Soil Samples (Continued)										
NDESF31	Soil	03/29/2017	Primary	0.00	1.00	<0.0202	<0.0202	<0.0202	0.533	0.533
NDESF31	Soil	03/30/2017	Primary	1.00	2.00	<0.102	<0.102	<0.102	0.815	0.815
NDESG14	Soil	02/09/2017	Primary	0.00	1.00	<0.0213	<0.0213	<0.0213	0.283	0.283
NDESG14	Soil	02/09/2017	Primary	1.00	2.00	<0.0206	<0.0206	<0.0206	<0.0137	ND
NDESG15	Soil	02/09/2017	Primary	0.00	1.00	<0.0213	<0.0213	<0.0213	0.623	0.623
NDESG15	Soil	02/09/2017	Primary	1.00	2.00	<0.0213	<0.0213	<0.0213	<0.0142	ND
NDESG16	Soil	02/09/2017	Primary	0.00	1.00	<0.103	<0.103	0.18	0.982	1.16
NDESG16	Soil	02/09/2017	Primary	1.00	2.00	<0.0200	<0.0200	<0.0200	<0.0134	ND
NDESG17	Soil	03/29/2017	Primary	0.00	1.00	<0.100	<0.100	<0.100	0.782	0.782
NDESG17	Soil	03/30/2017	Primary	1.00	2.00	<0.0208	<0.0208	<0.0208	0.0731	0.0731
NDESG18	Soil	03/29/2017	Primary	0.00	1.00	<0.0988	<0.0988	<0.0988	1.01	1.01
NDESG18	Soil	03/30/2017	Primary	1.00	2.00	<0.0206	<0.0206	<0.0206	0.0288	0.0288
NDESH15	Soil	03/29/2017	Primary	0.00	1.00	<0.0206	<0.0206	<0.0206	0.317	0.317
NDESH15	Soil	03/30/2017	Primary	1.00	2.00	<0.0208	<0.0208	<0.0208	<0.0139	<0.00694
NDESH16	Soil	03/29/2017	Primary	0.00	1.00	<0.0207	<0.0207	<0.0207	0.406	0.406
NDESH16	Soil	03/30/2017	Primary	1.00	2.00	<0.0198	<0.0198	<0.0198	<0.0132	<0.00661
NDESH17	Soil	03/29/2017	Primary	0.00	1.00	<0.101	<0.101	<0.101	1.26	1.26
NDESH17	Soil	03/30/2017	Primary	1.00	2.00	<0.0201	<0.0201	<0.0201	0.0629	0.0629
NDESH18	Soil	03/29/2017	Primary	0.00	1.00	<0.0209	<0.0209	<0.0209	0.279	0.279
NDESH18	Soil	03/30/2017	Primary	1.00	2.00	<0.0198	<0.0198	<0.0198	0.103	0.103
NDESH16	Soil	03/29/2017	Primary	0.00	1.00	<0.0204	<0.0204	<0.0204	<0.0136	<0.00678
NDESH16	Soil	03/30/2017	Primary	1.00	2.00	<0.0208	<0.0208	<0.0208	<0.0138	<0.00692

Notes:

1. Units: mg = milligrams; kg = kilograms
2. PCBs = Polychlorinated Biphenyls
3. NA = Not Applicable
4. < = Parameter not detected at the indicated laboratory reporting limit
5. Bold value equal to or exceeds applicable criteria
6. ND = Not Detected