





OPEN TO REVEAL
PROOF OF PURCHASE
RETURN TO REVEAL
PROOF OF PURCHASE
RETURN TO REVEAL
PROOF OF PURCHASE

RECYCLEPAK
VEOLIA



RECYCLEPAK
VEOLIA
LARGE 4FT FLUORESCENT LAMP RECYCLING BOX
USE FOR THIS BOX ONLY IN COMPLIANCE WITH THE RECYCLING TREATY AND CONVENTIONS.
USE OF THIS SERVICE IS SUBJECT TO THE RECYCLING TREATY AND CONVENTIONS.
FOR MORE INFORMATION, VISIT www.recyclepak.com



FRAGILE
HANDLE WITH CARE

RECYCLEPAK
VEOLIA

FRAGILE



Compliance with Confidence®
Hg
4G/715/2/15
USA/4-BH 9305

RECYCLEPAK
VEOLIA

LARGE 4FT FLUORESCENT LAMP RECYCLING BOX
USE FOR THIS BOX ONLY IN COMPLIANCE WITH THE RECYCLING TREATY AND CONVENTIONS.
USE OF THIS SERVICE IS SUBJECT TO THE RECYCLING TREATY AND CONVENTIONS.
FOR MORE INFORMATION, VISIT www.recyclepak.com

FRAGILE
HANDLE WITH CARE

Compliance with Confidence®
Hg
UN
4G/715/2/15
USA/4-BH 9305

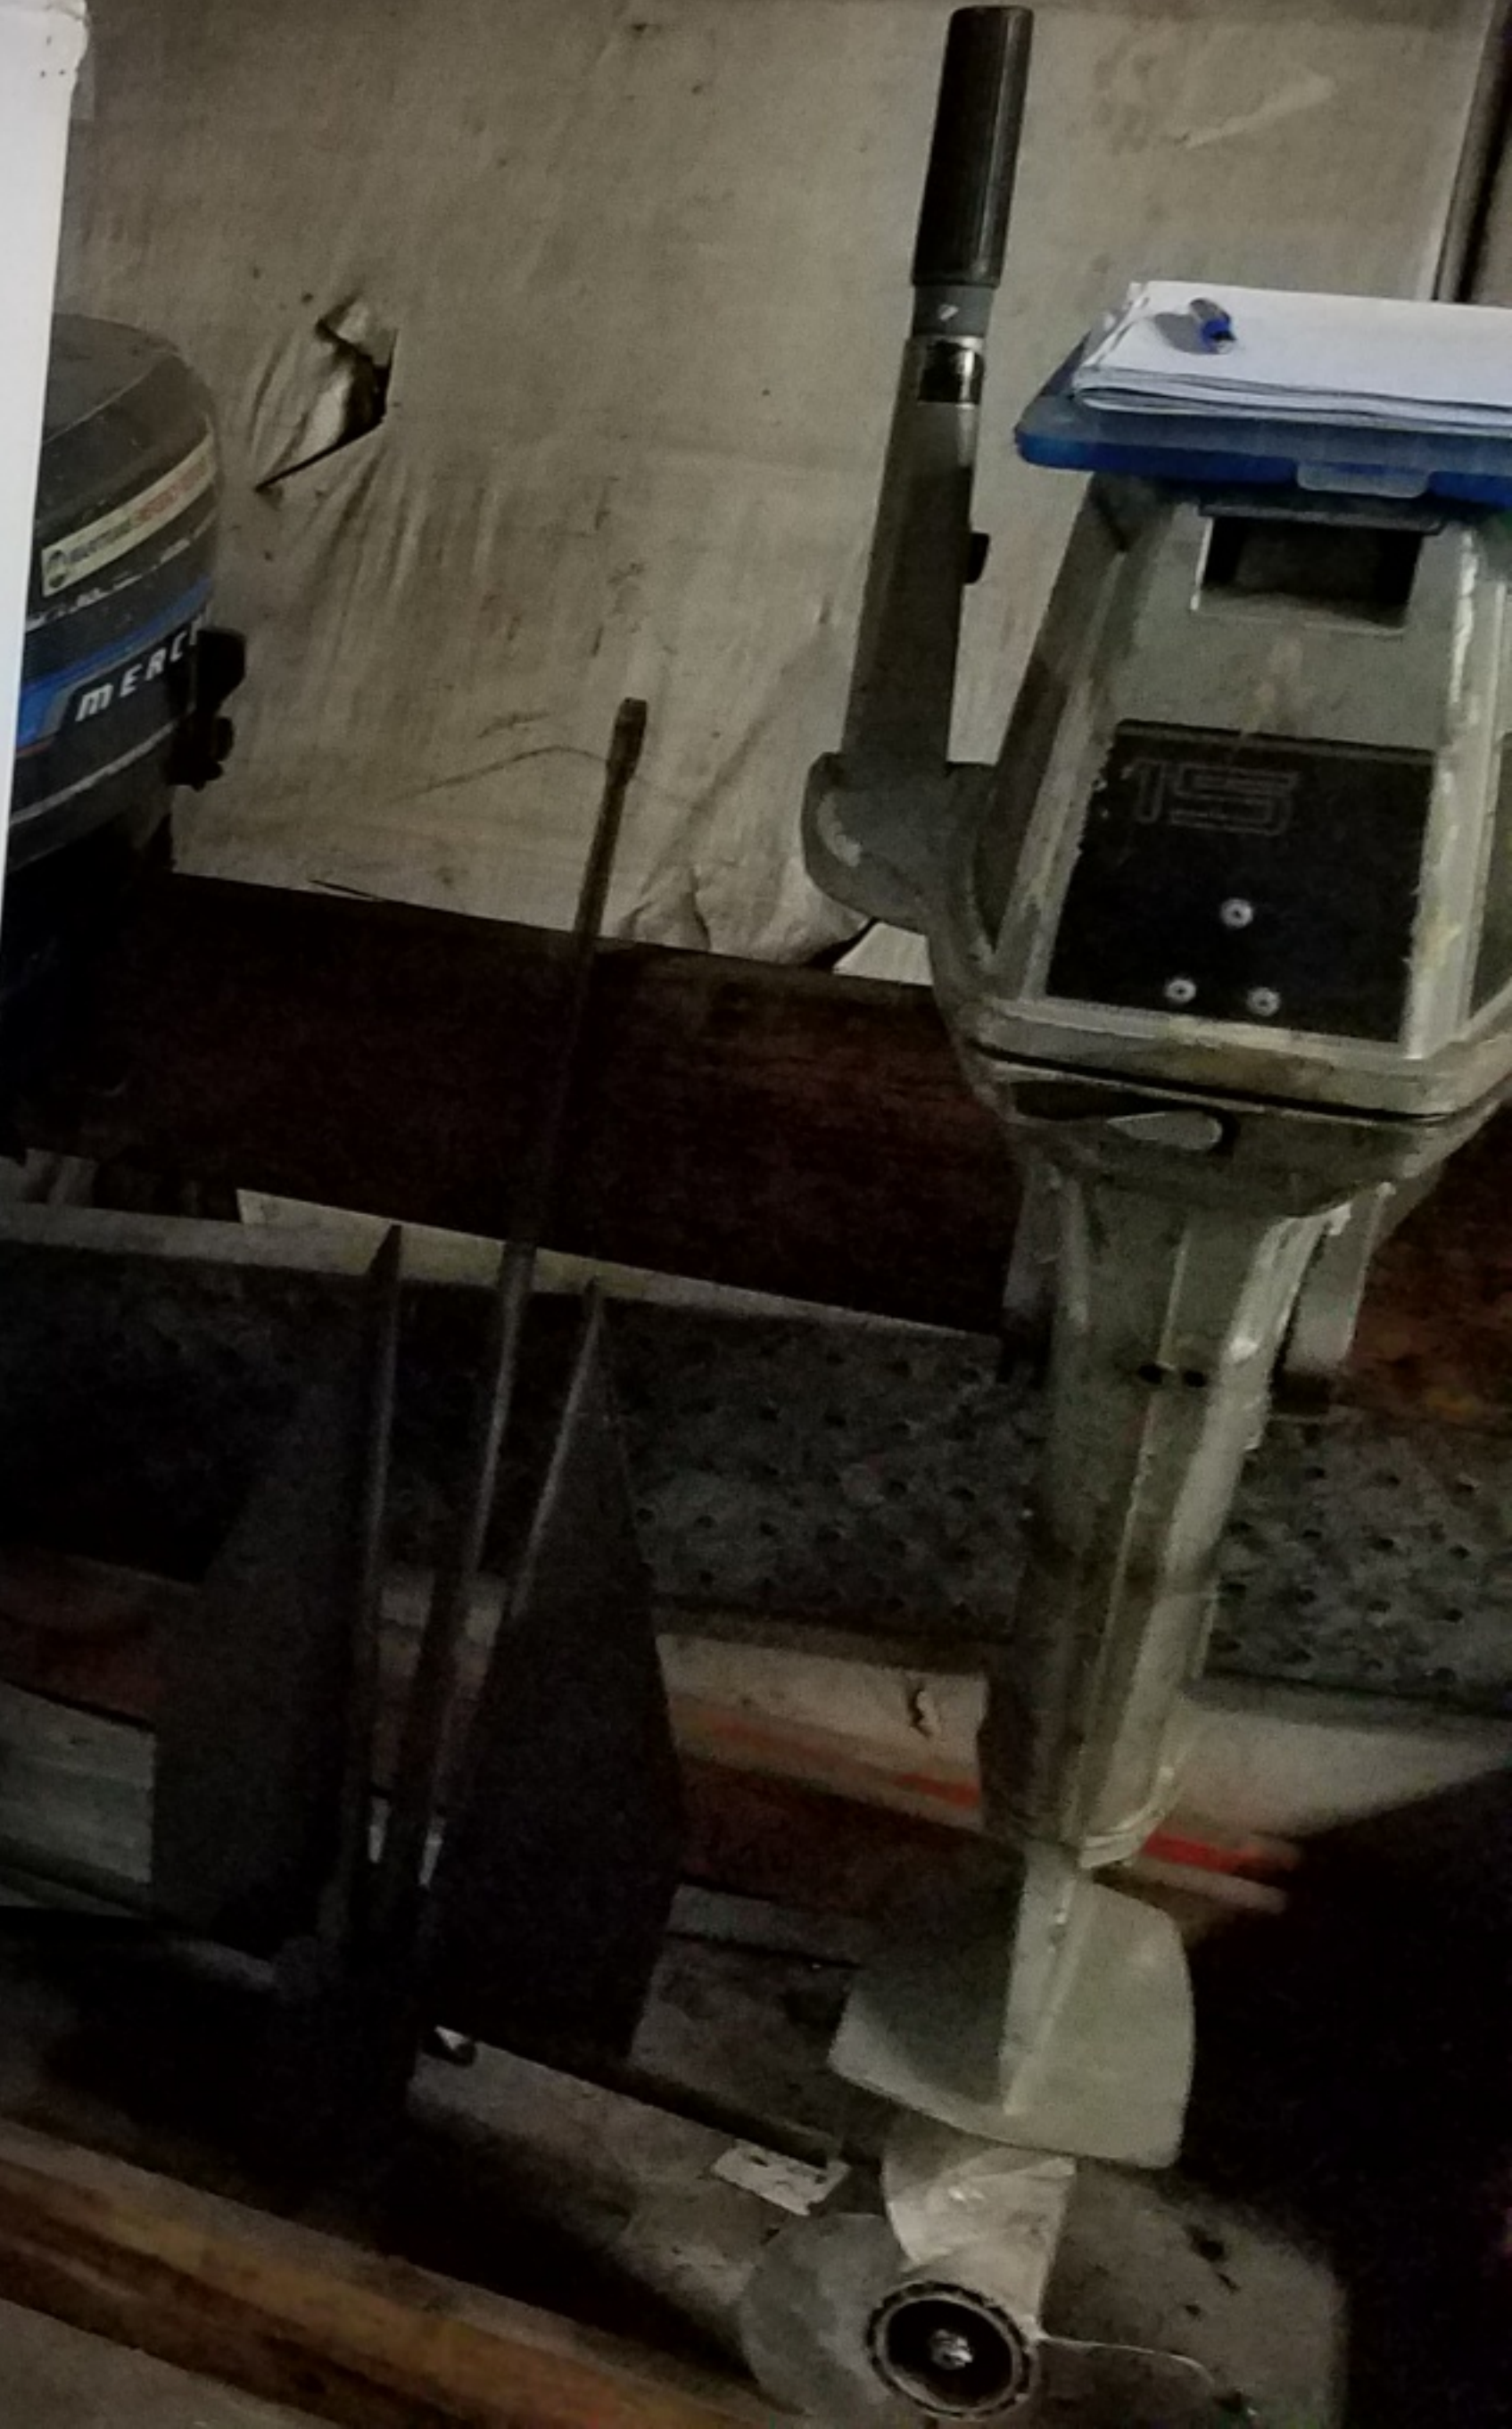

**USED
OIL**

**USED
OIL**





DES

TRUCK
ENGINE
OIL
ONLY



NON-REGULATED
WASTE

IKEA





DIES

Call 1-800-BURNETTI, We're Ready
BURNETTI, P.A.
Auto Accidents • Work Injuries



Chicago Pneumatic

USED OIL
GENERATOR INFORMATION
Name: J.R.
Address: 1000 N. 1st St.
City: Miami, FL 33132
Phone: 305-555-1234
E-mail: j.r. @ example.com

NON-HAZARDOUS WASTE

UNIFIED ENVIRONMENTAL SERVICES, INC.



HONDA
150hp

DESC

HAZARDOUS
WASTE

HAZARDOUS
WASTE

DRIVER
KEEP
OFF



IBK0609

TECHNET

**USED
ANTIFREEZE**

GBC USA





207

Diversified Environmental
Services, Inc.
813-248-3256
DES
TAMPA, FL
US DOT 448665

CAP. 5,000 GAL.
FLD 9484183566

DES

285

DES



EIT A44
FLORIDA
SUNSHINE STATE



Call 1-800-BURNETTI, We're Ready
BURNETTI, P.A.
Auto Accidents • Work Injuries



Auto Accidents • Work Injuries

OFFICE
LAKELAND



387 KENWORTH

Diversified Environmental
Services, Inc.
813-248-3269
DES
TAMPA, FL

DES

CAP 5,500 GAL.
FLD 9484183566

BILGE
WATER


DES





DES

TAMPA, FL



McTIGHE INDUSTRIES
OIL / WATER SEPARATOR
MODEL # POWS-550





1

USED
OIL

HYDRA-MATH
CARMEL



3

2

MIDGIE INDUSTRIES
OIL / WATER SEPARATOR
MODEL # POWS-550



1A2/Y1 2/100
USA/R187/14-RL

NON-REGULATED WASTE
D.E.S.
1201 N. 22 ST - 33609
Tampa
Water Treatment
Plant Tank Bottoms
NON-REGULATED WASTE



NON-REGULATED WASTE
D.E.S.
1201 N. 22 ST - 33609
Tampa
Water Treatment
Plant Tank Bottoms
NON-REGULATED WASTE



USED
OIL







Sii

SPX POWER TEAM

CAUTION
CORROSION
DANGEROUS VAPOR
RELEASED





905

511

590

504A

Hot Water

Hot Water

Hot Water



V492

V394

ADLER
TANK CONTROLS

1-800-421-7471
www.adler-tankcontrols.com

TEVEDORES



DES 860

11
10
9
8
7
6







906


Salty's
Manufacturing, LTD
Central Florida
1-888-80-SALTY

DES
TAMPA, FL

WARNING
NO CARGO
VISITORS
NO PUBLIC

DMT



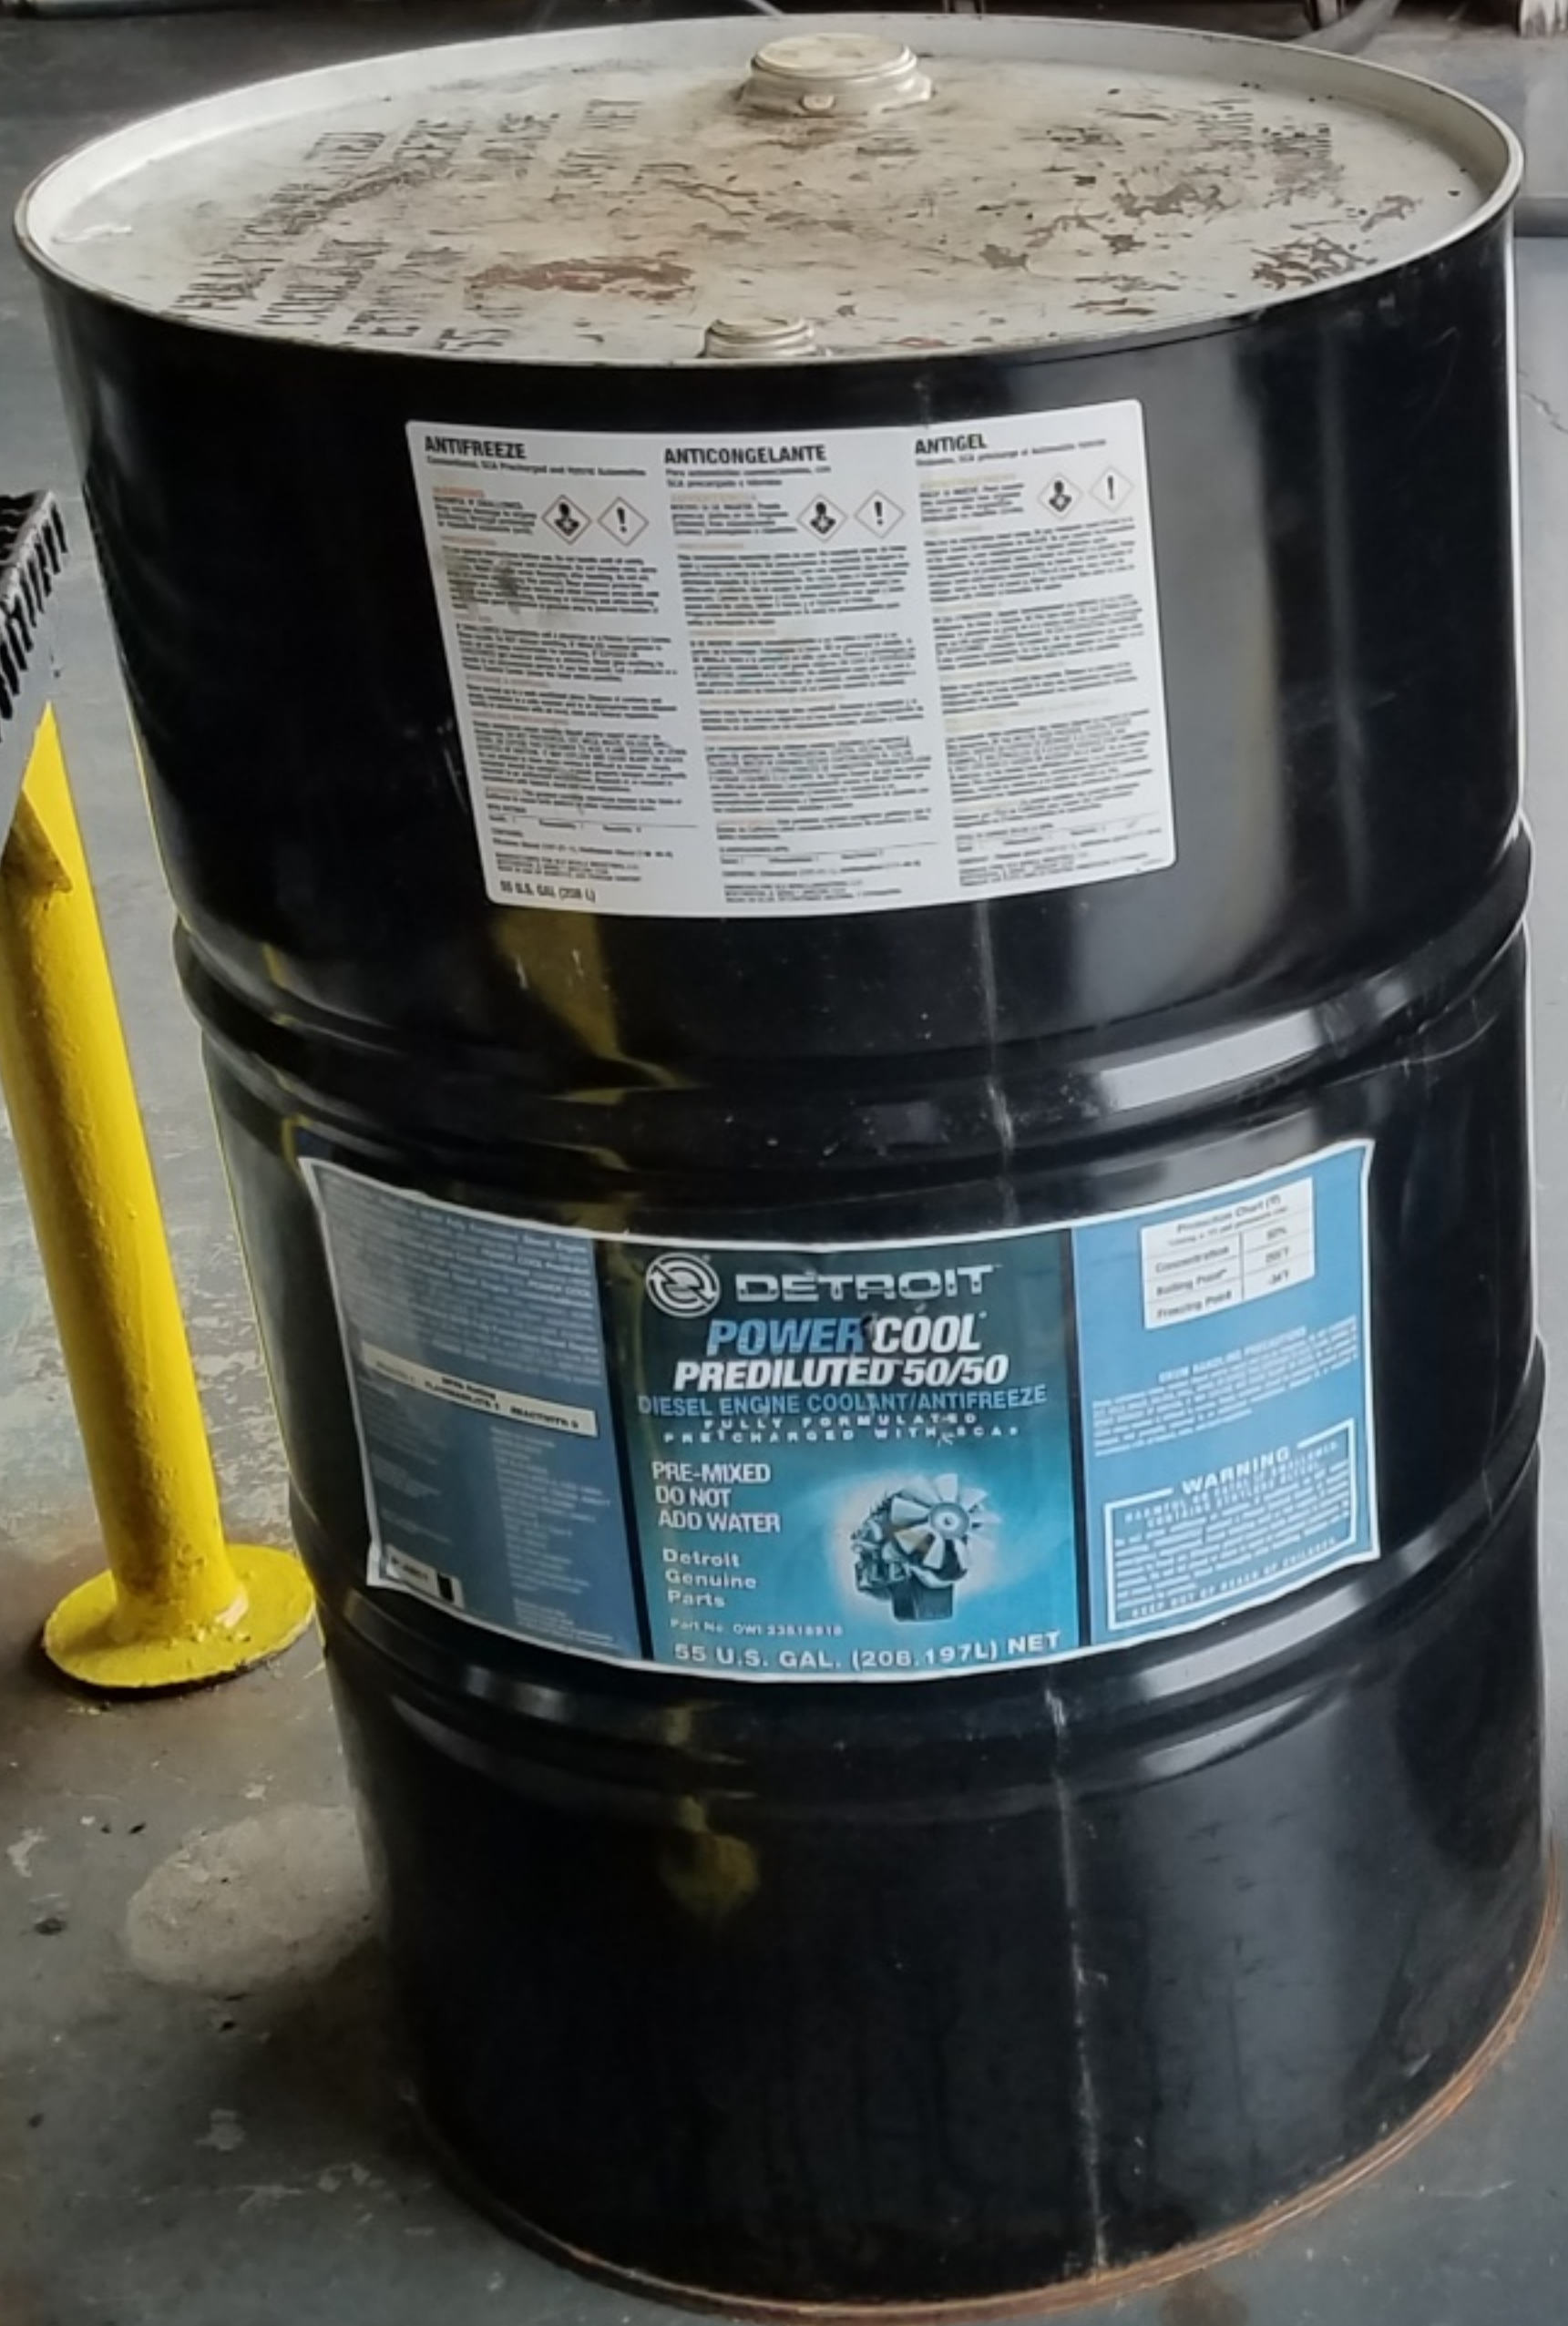

ANTIFREEZE
Contiene: Glicol Propileno e Acqua Demineralizzata.
Non miscelare con altri liquidi.
Non versare su superfici.
Non versare in fognature.
Non versare in corsi d'acqua.
Non versare in terreni agricoli.
Non versare in zone protette.
Non versare in zone residenziali.
Non versare in zone industriali.
Non versare in zone urbane.
Non versare in zone rurali.
Non versare in zone forestali.
Non versare in zone marine.
Non versare in zone lacustri.
Non versare in zone fluviali.
Non versare in zone di riserva.
Non versare in zone di protezione.
Non versare in zone di interesse.
Non versare in zone di valore.
Non versare in zone di patrimonio.
Non versare in zone di cultura.
Non versare in zone di storia.
Non versare in zone di arte.
Non versare in zone di scienza.
Non versare in zone di tecnologia.
Non versare in zone di innovazione.
Non versare in zone di ricerca.
Non versare in zone di sviluppo.
Non versare in zone di progresso.
Non versare in zone di futuro.
Non versare in zone di speranza.
Non versare in zone di fiducia.
Non versare in zone di amore.
Non versare in zone di pace.
Non versare in zone di giustizia.
Non versare in zone di equità.
Non versare in zone di libertà.
Non versare in zone di democrazia.
Non versare in zone di diritti.
Non versare in zone di uguaglianza.
Non versare in zone di solidarietà.
Non versare in zone di cooperazione.
Non versare in zone di collaborazione.
Non versare in zone di partecipazione.
Non versare in zone di inclusione.
Non versare in zone di empowerment.
Non versare in zone di leadership.
Non versare in zone di innovazione.
Non versare in zone di ricerca.
Non versare in zone di sviluppo.
Non versare in zone di progresso.
Non versare in zone di futuro.
Non versare in zone di speranza.
Non versare in zone di fiducia.
Non versare in zone di amore.
Non versare in zone di pace.
Non versare in zone di giustizia.
Non versare in zone di equità.
Non versare in zone di libertà.
Non versare in zone di democrazia.
Non versare in zone di diritti.
Non versare in zone di uguaglianza.
Non versare in zone di solidarietà.
Non versare in zone di cooperazione.
Non versare in zone di collaborazione.
Non versare in zone di partecipazione.
Non versare in zone di inclusione.
Non versare in zone di empowerment.
Non versare in zone di leadership.


DETROIT
POWER COOL
PREDILUTED 50/50
DIESEL ENGINE COOLANT/ANTIFREEZE
FULLY FORMULATED
PRECHARGED WITH GCA

PRE-MIXED
DO NOT
ADD WATER



Detroit
Genuine
Parts
Part No. DM123818818
55 U.S. GAL. (208.197L) NET

WARNING
RISCHIO DI ESPLOSIONE
Evitare l'uso di fiamme libere
Evitare l'uso di fiamme scoppiate
Evitare l'uso di fiamme scintillanti
Evitare l'uso di fiamme a caldo
Evitare l'uso di fiamme a freddo
Evitare l'uso di fiamme a temperatura ambiente
Evitare l'uso di fiamme a temperatura superiore a 50°C
Evitare l'uso di fiamme a temperatura superiore a 100°C
Evitare l'uso di fiamme a temperatura superiore a 150°C
Evitare l'uso di fiamme a temperatura superiore a 200°C
Evitare l'uso di fiamme a temperatura superiore a 250°C
Evitare l'uso di fiamme a temperatura superiore a 300°C
Evitare l'uso di fiamme a temperatura superiore a 350°C
Evitare l'uso di fiamme a temperatura superiore a 400°C
Evitare l'uso di fiamme a temperatura superiore a 450°C
Evitare l'uso di fiamme a temperatura superiore a 500°C
Evitare l'uso di fiamme a temperatura superiore a 550°C
Evitare l'uso di fiamme a temperatura superiore a 600°C
Evitare l'uso di fiamme a temperatura superiore a 650°C
Evitare l'uso di fiamme a temperatura superiore a 700°C
Evitare l'uso di fiamme a temperatura superiore a 750°C
Evitare l'uso di fiamme a temperatura superiore a 800°C
Evitare l'uso di fiamme a temperatura superiore a 850°C
Evitare l'uso di fiamme a temperatura superiore a 900°C
Evitare l'uso di fiamme a temperatura superiore a 950°C
Evitare l'uso di fiamme a temperatura superiore a 1000°C

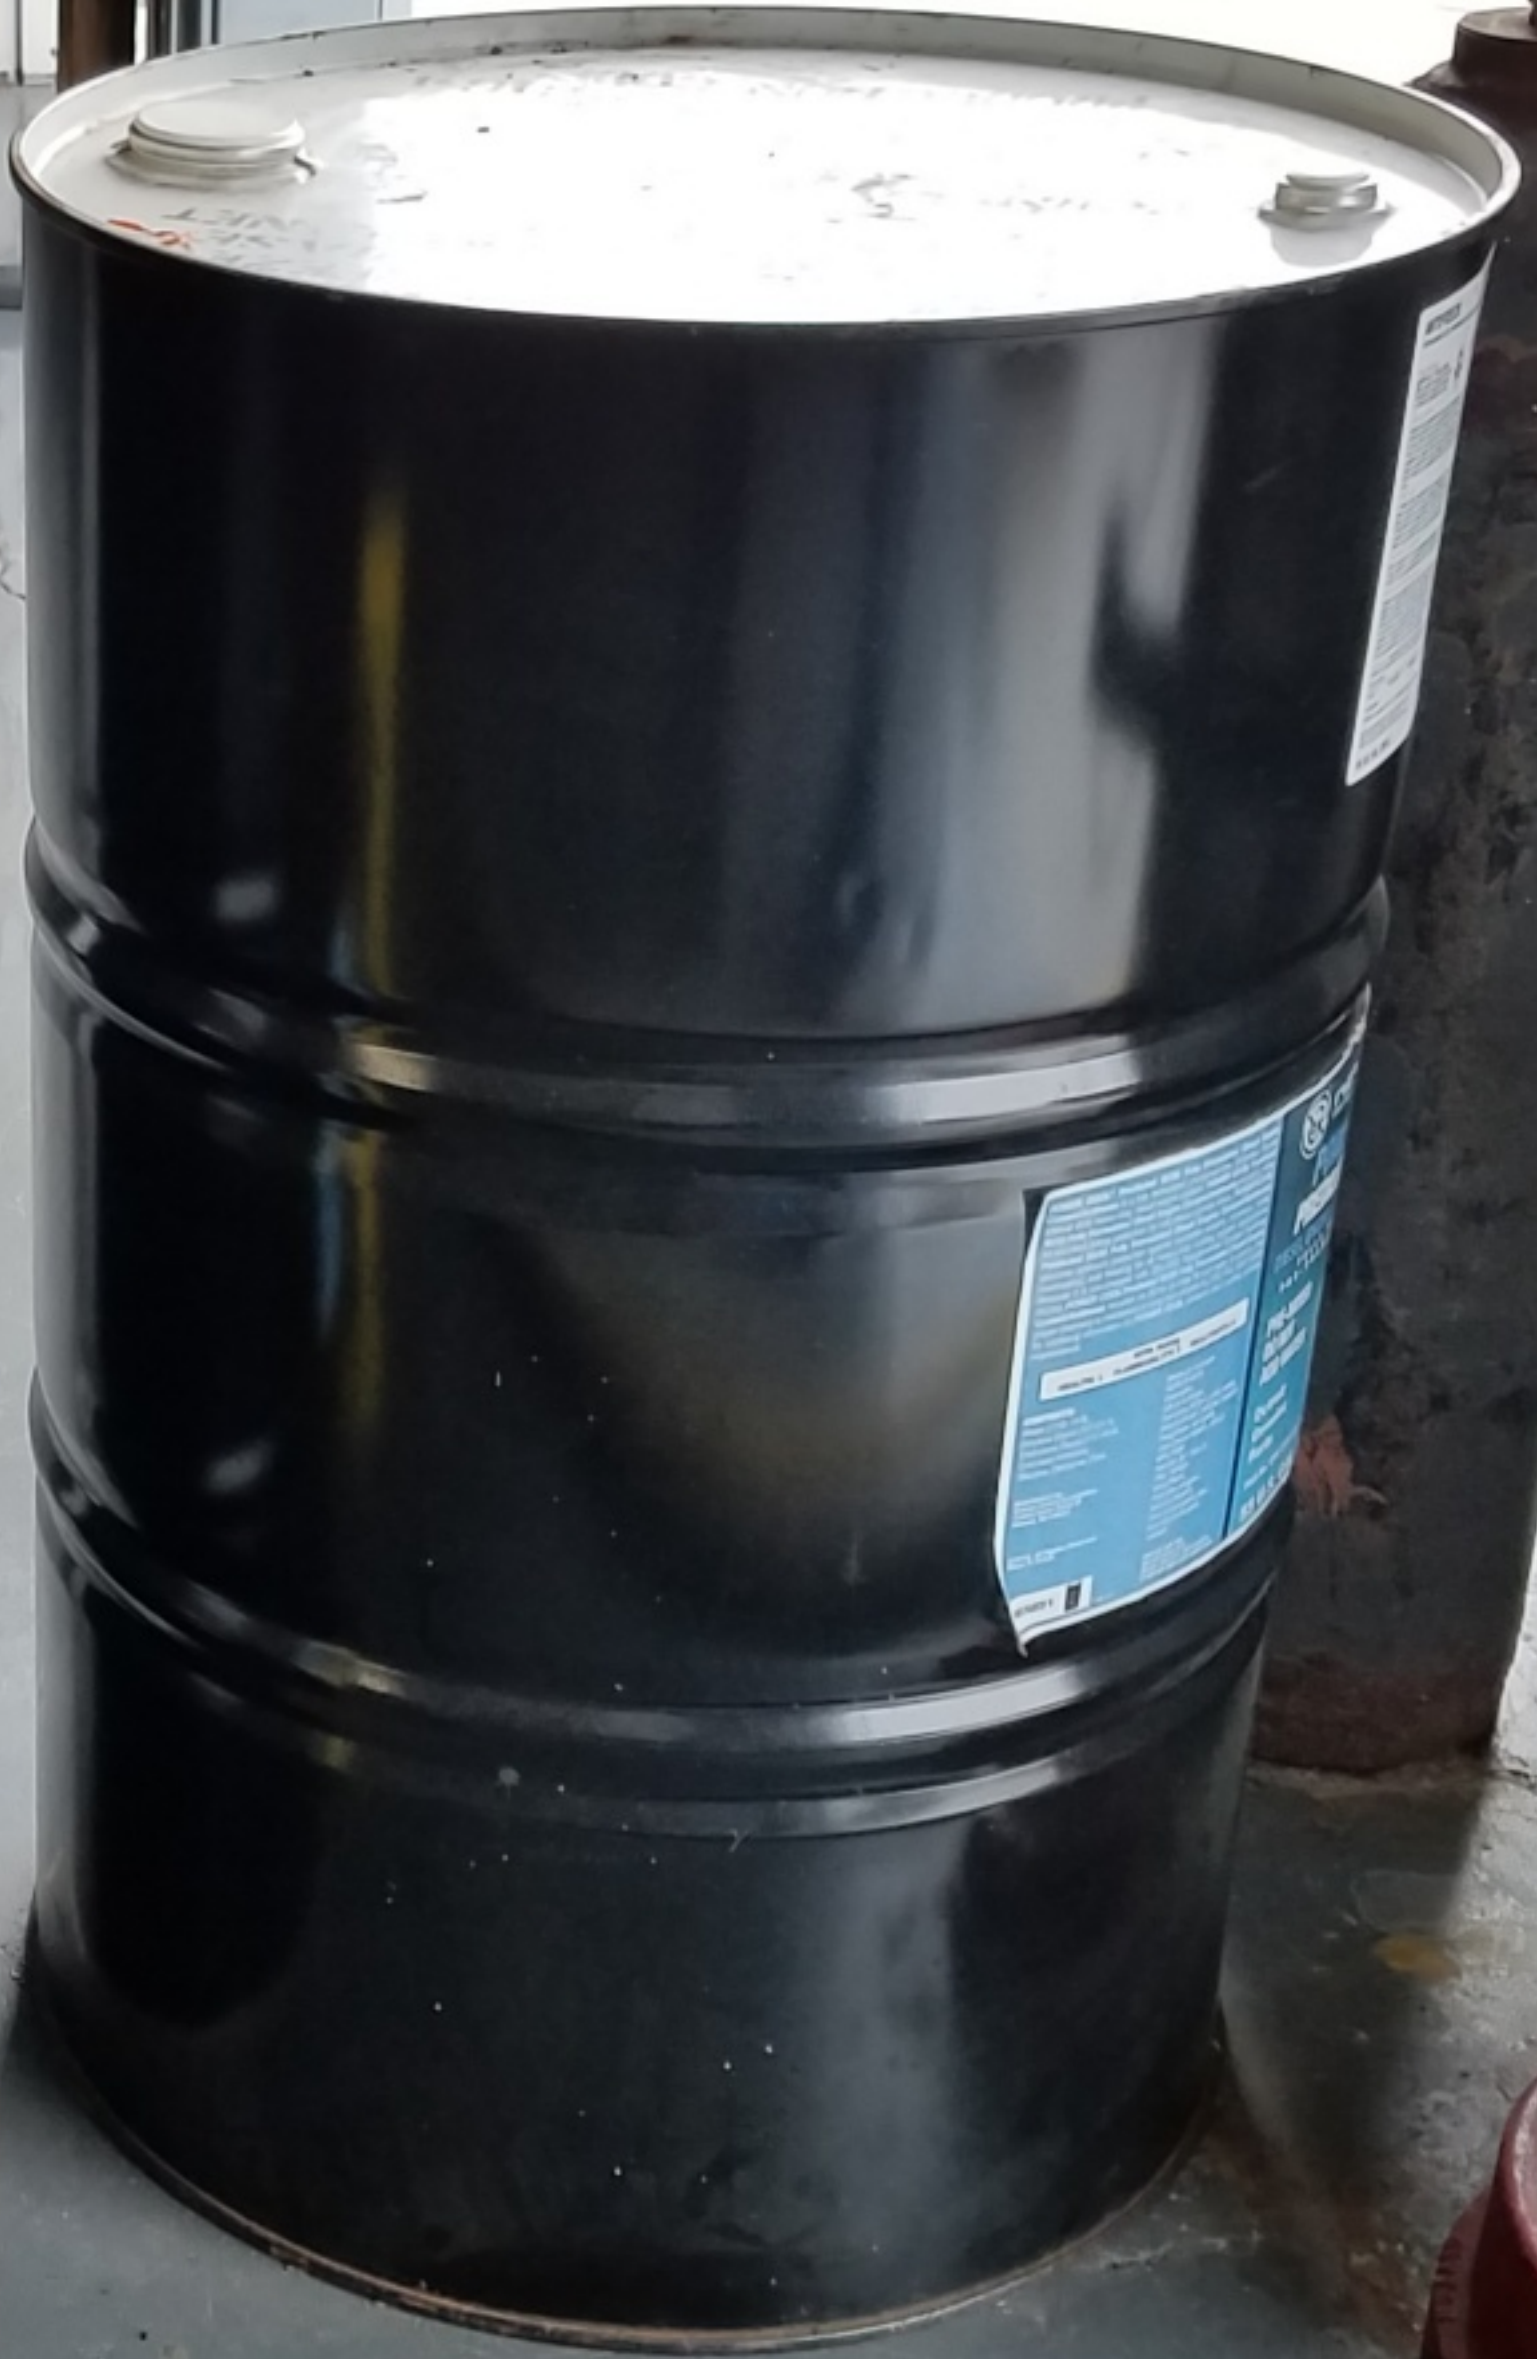



Brooke
CHAPMAN
7/18

PRE-APPLIED
DO NOT
ADD WATER

WARNING
Using Extension Cords
On This Equipment
May Cause Fire or
Motor Failure



COMBUSTIBLE

DIRECTIONS: This non-alkaline cleaner emulsifies grease, waxes, and oil so they may be hosed off.

CLEANING MOTORS: Brush or spray motor block with solution. Flush with water. Use pressure hose when available for flushing.

FOR CHASSIS, WHEELS, RUNNING GEAR AND PARTS: Clean same as above.

CONCRETE FLOORS: Mop on floor, agitate with stiff brush, and hose off with water. Use for cold tank degreasing. Use carburetor cleaner to remove carbon.

**2nd SHIFT
WAX, GREASE,
SILICONE, ROAD OIL,
AND TAR
REMOVER**



Keep away from heat, sparks, open flame. USE WITH ADEQUATE VENTILATION. Avoid breathing of vapor and prolonged contact with skin. Keep container closed. KEEP OUT OF REACH OF CHILDREN.

CAUTION


Do not induce vomiting if swallowed. Seek medical attention. Avoid prolonged or repeated contact with skin. If liquid gets in eyes, immediately flush with plenty of water.

Chemical Laboratories, Inc.
1909 E. Hemlock Street
Tampa, FL 33605
813-248-0080

Since use of this product is beyond manufacturer's control, manufacturer's warranty on this quality tested product is limited to purchase. No other guarantee is given or implied. Read and follow ALL safety information contained on this label and on the MSDS. Use assumes all risk.

Use of this product is beyond manufacturer's control, manufacturer's warranty on this quality tested product is limited to purchase. No other guarantee is given or implied. Read and follow ALL safety information contained on this label and on the MSDS. Use assumes all risk.

Material: **69595**

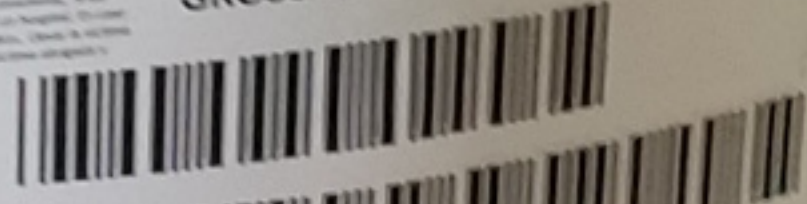

TARE Wt.: 32.00 LB
NET Wt.: 344.00 LB
GROSS Wt.: 376.00 LB

Caution: For Manufacturing, Processing or Repackaging
Country of Origin: USA
Printed on 2 September 2004

DOT
IT
Including "Caution" on the label of items, which apply to reproductive harm.

SPRINKLE	1
1	2
2	3
3	4

INSTRUCTION 1

PC: 11626

HC LOT # 742466100

MFG BATCH #

Sodium Hypochlorite 10%

OVERPACK

55 Gal Recon Poly Drum

QTY PLT PROD/REC DATE
1 EA QTY 07/18/17

SEAL #:

SERIAL #:

4

KRN


PRECAUTIONARY STATEMENTS
Hazardous if inhaled, skin contact, or contact with eyes.
Contains chlorine gas. Irritating to the respiratory tract, eyes, and skin.
Contains 10% sodium hypochlorite solution. May cause skin irritation or chemical burns. Avoid contact with eyes, skin, and clothing.
Contains sodium hydroxide. May cause skin irritation or chemical burns. Avoid contact with eyes, skin, and clothing.
Contains sodium chloride. May cause skin irritation or chemical burns. Avoid contact with eyes, skin, and clothing.
Contains sodium hydroxide. May cause skin irritation or chemical burns. Avoid contact with eyes, skin, and clothing.
Contains sodium chloride. May cause skin irritation or chemical burns. Avoid contact with eyes, skin, and clothing.

SODIUM HYPOCHLORITE 10%
Active Ingredient: Sodium Hypochlorite 10.0%
Other Ingredients: 90.0%
Total: 100.0%


**KEEP OUT OF REACH OF CHILDREN
DANGER**

FIRST AID
If in eyes: flush with water for 15-20 minutes. If on skin: wash with soap and water. If inhaled: get to fresh air. If swallowed: drink water.
For more information, call 1-800-233-1222.

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT AS A BLEACH OR DISINFECTANT UNLESS THE LABEL SPECIFICALLY SO STATES.
NOTE: This product is a strong oxidizer and may cause skin irritation or chemical burns. Avoid contact with eyes, skin, and clothing. Do not use in confined spaces. Do not mix with other chemicals.

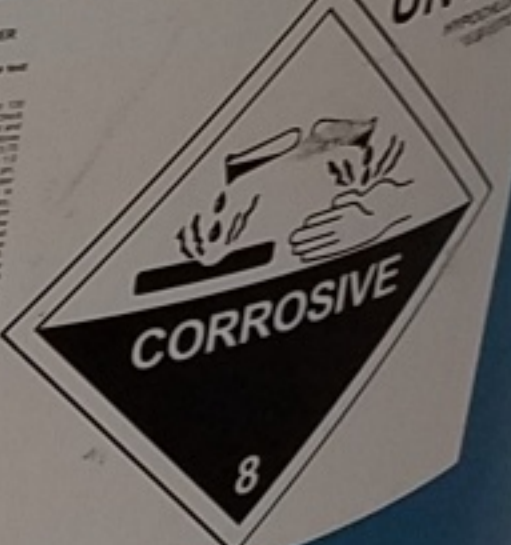

Harcros Chemicals Inc.
P.O. Box 3800, Phoenix, AZ 85068-3800

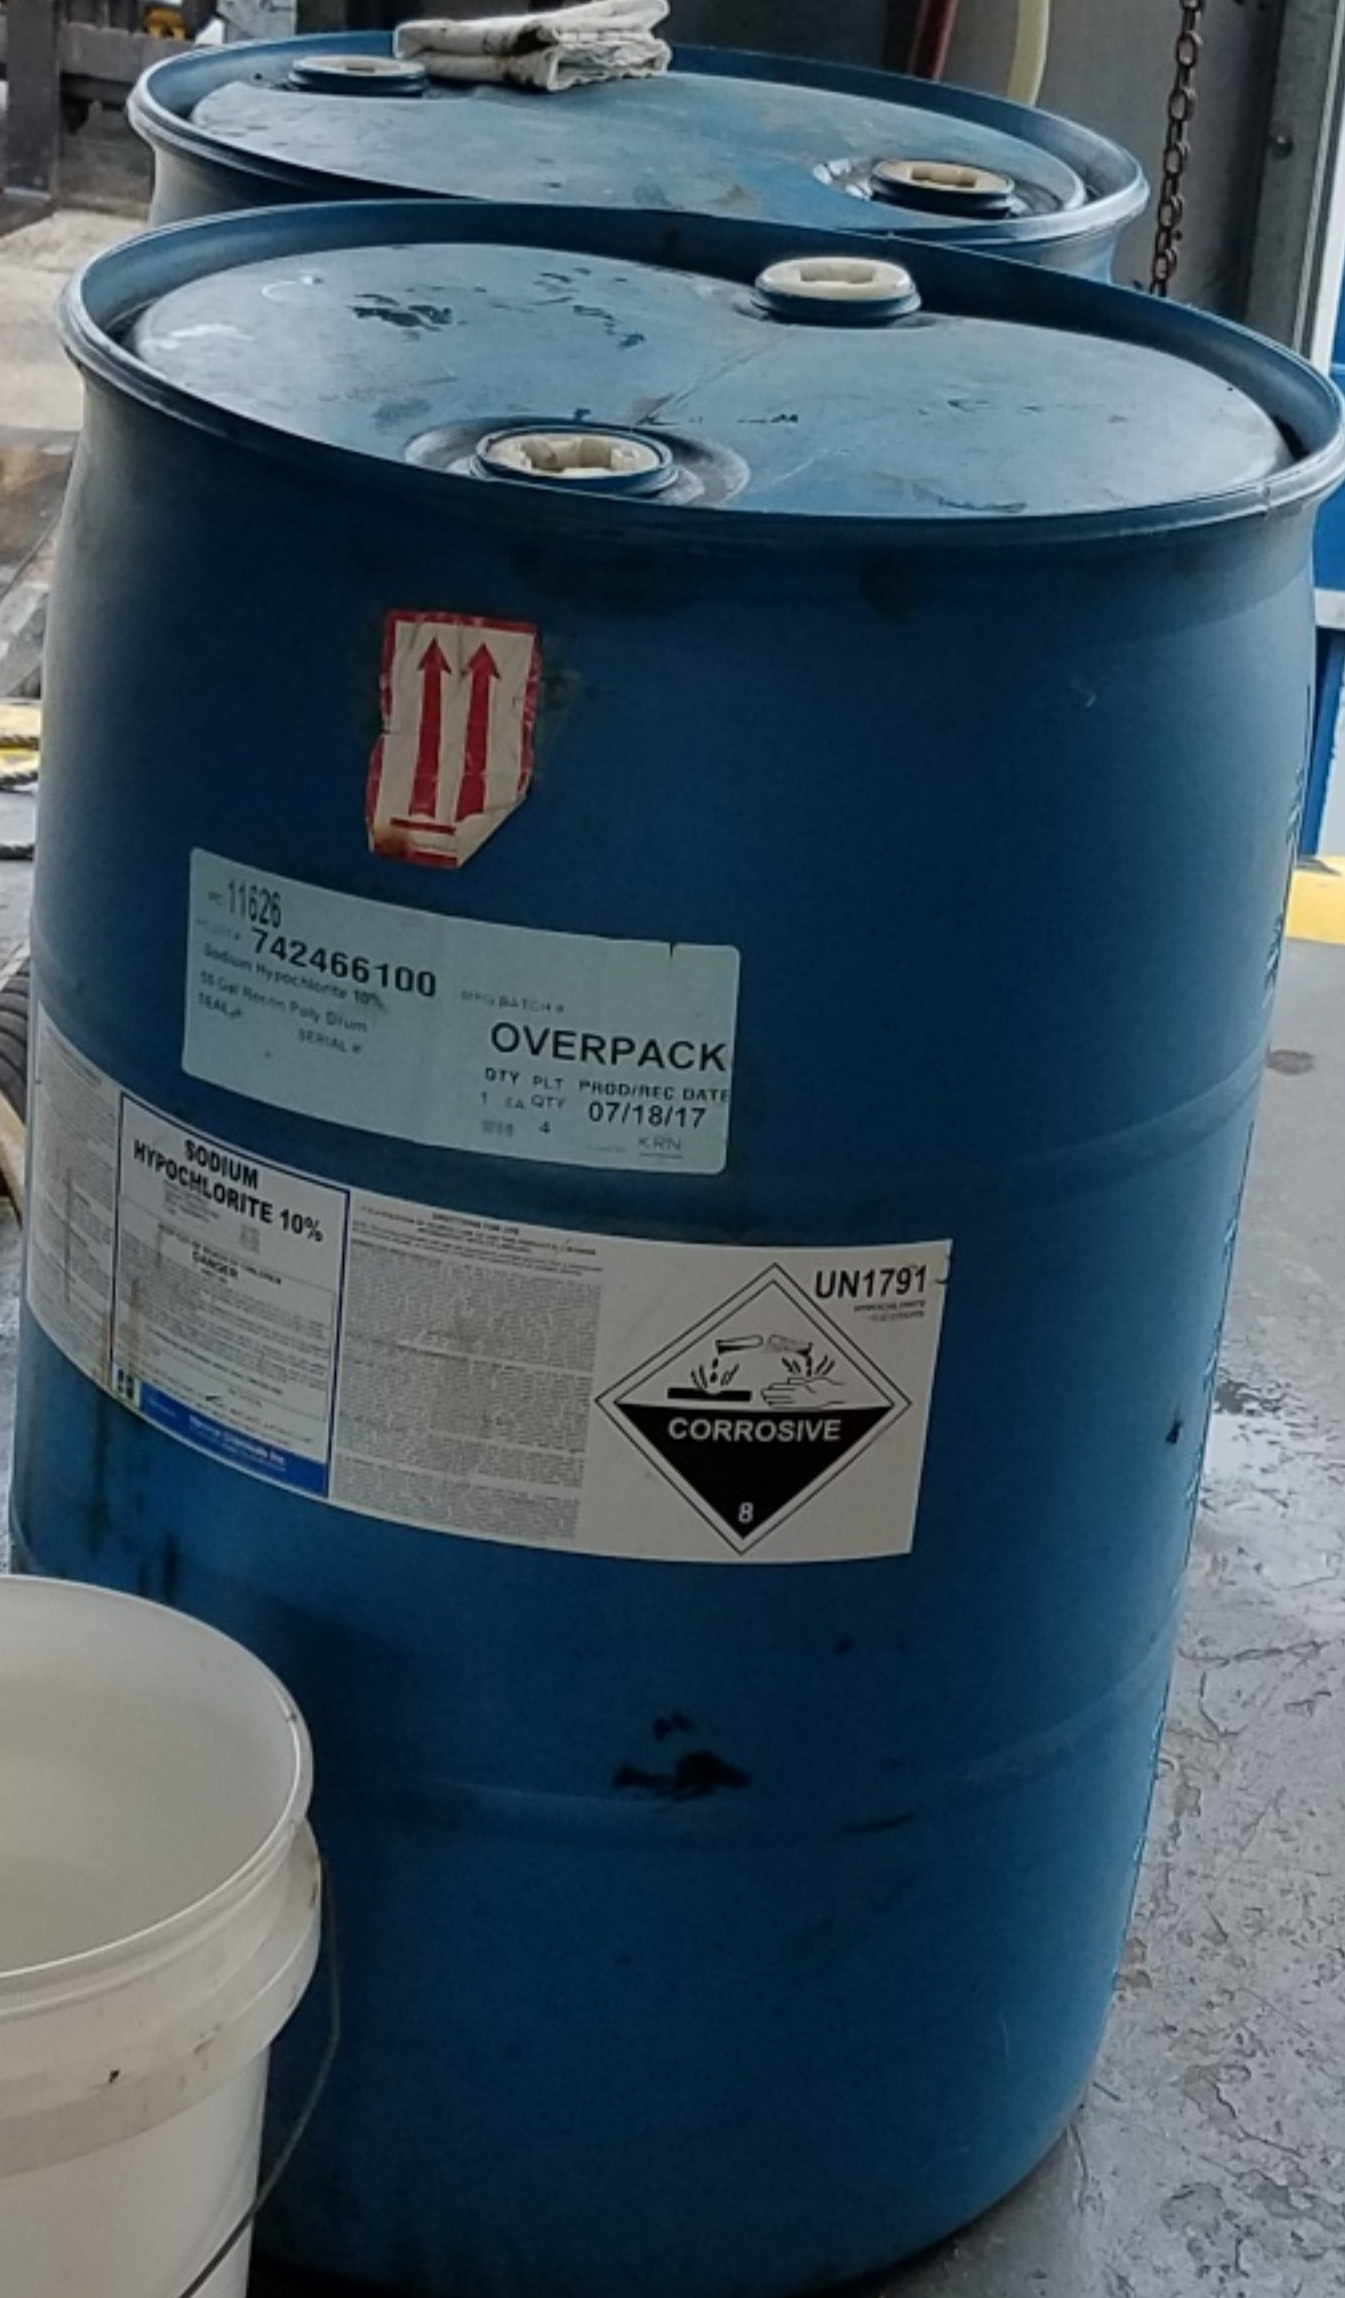

FLORIDA
272 7CF

NORTH STAR
Proven Performance

ATV Spot Sprayer

26-Gallon Tank

For water or chemical spraying applications

- 120/2.2 GPM open flow NorthStar® NSQ Series™ 70 PSI on-demand pump
- Pump includes durable and efficient Honeywell MICRO SWITCH™
- Exclusive 26-gallon tank design with thick walls and superior chemical resistance
- Approved for use with most agricultural chemicals
- Spray gun nozzle assembly
- 20-ft. horizontal spray pattern
- Optional application

Includes:
(1) NorthStar® NSQ
(1) 26-gallon tank
tank drain
(1) Spray gun with

NORTH STAR
26-Gallon Tank



Includes:
(1) NorthStar® NSQ
(1) 26-gallon tank
tank drain
(1) Spray gun with

FLAMMABLE
KEEP FIRE AWAY



INFLAMMABLE
MANTÉNGASE ALEJADO DEL FUEGO
INFLAMMABLE
GARDER LOIN DU FEU

Jamco
SAFETY STORAGE CABINET

CONSTRUCTED IN ACCORDANCE WITH N.F.P.A. 30 STANDARDS
MEETS OSHA REQUIREMENTS

