

BOARD OF COUNTY COMMISSIONERS

Kevin Beckner
Victor D. Crist
Ken Hagan
Al Higginbotham
Lesley "Les" Miller, Jr.
Sandra L. Murman
Mark Sharpe



Office of the County Administrator
Michael S. Merrill

CHIEF ADMINISTRATIVE OFFICER
Helene Marks

CHIEF FINANCIAL ADMINISTRATOR
Bonnie M. Wise

DEPUTY COUNTY ADMINISTRATORS
Lucia E. Garsys
Sharon D. Subadan

July 29, 2013

Mr. John Morris, P.G.
Florida Department of Environmental Protection
Waste Permitting Section
13051 Telecom Parkway
Temple Terrace, FL 33637

**RE: Southeast County Landfill
Laboratory Analytical Results
Initial Assessment Monitoring Plan
Report No. 34 – June 2013**

Dear Mr. Morris:

The Hillsborough County Public Utilities Department (County) is pleased to provide the analytical results from the June 2013 sampling event conducted as part of our continuation of the Initial Assessment Monitoring Plan (IAMP). The IAMP was developed to address the potential impacts to groundwater from the sinkhole in Phase VI of the Southeast County Landfill (SCLF), which was discovered on December 14, 2010.

As part of the agreement between the County and FDEP Southwest District, three (3) upper Floridan/Limestone aquifer monitoring wells, designated as TH-72, TH-76 and TH-77 are sampled on a monthly schedule. Representative samples were collected on June 5, 2013 and analyzed for total dissolved solids (TDS), chloride, total ammonia, arsenic, iron, sodium, and five (5) field parameters. Each sample collected was analyzed by our contracted laboratory, Test America, Inc. The following paragraphs summarize the parameter specific results pertinent to the evaluation of potential water quality impacts from the sinkhole at the SCLF.

Turbidity

During this monthly IAMP sampling event, turbidity values in Upper Floridan/Limestone aquifer monitoring wells TH-72, TH-76, and TH-77 were 0.27, 16.2 and 35.4 Nephelometric Turbidity Units (NTUs), respectively. The elevated turbidity observed in TH-76 and TH-77 is common for monitoring wells for a period of time after installation, even after a thorough development. The County believes that the turbidity values at these two locations will continue to decrease over time as they are pumped during sampling activities.

Conductivity

During this monthly IAMP sampling event, the conductivity values observed in Upper Floridan/Limestone aquifer monitoring wells TH-72, TH-76, and TH-77 were 1,440, 401, and 384 micromhos per centimeter (umhos/cm), respectively. Monitoring well TH-72 is the closest well to the sinkhole and continues to exhibit groundwater impacts observed over the last twelve (12) months. The values observed in TH-76 and TH-77 are consistent with the unaffected deep wells across the site.

Total Dissolved Solids (TDS)

One (1) of the three (3) Upper Floridan/Limestone aquifer wells exhibited TDS above the SDWS of 500 mg/l. The TDS observed in TH-72 was observed at 850 mg/l. The remaining two wells, TH-76 and TH-77 exhibited 240 mg/l and 230 mg/l, respectively. The TDS value in monitoring well TH-72 continues to be elevated.

Chloride

The chloride value in TH-72 was observed at 290 mg/l, which is above the PDWS of 250 mg/l. The remaining two wells, TH-76 and TH-77 exhibited chloride values of 13 mg/l and 8.9 mg/l, respectively. It is apparent that the elevated chloride value in TH-72 is attributable to the sinkhole and/or grouting activities, but these impacts are limited to the immediate vicinity of the feature.

Iron

Total iron concentrations in each of the three (3) upper Floridan/Limestone aquifer monitoring wells were observed above the SDWS of 0.3 mg/l. TH-72, TH-76 and TH-77 exhibited iron at 0.82, 0.66, and 0.89 mg/l, respectively. The elevated iron concentrations observed at specific locations across the site are consistent with background water quality, and are likely naturally occurring and/or the result of past strip mining activities at the site.

Total Ammonia

The upper Floridan well TH-72 continues to exhibit ammonia above the former GCTL of 2.8 mg/l at a concentration of 8.4 mg/l. The other two wells, TH-76 and TH-77 were observed at 0.51 and 0.42 mg/l, respectively.

Groundwater Elevations and Direction of Flow

On June 4, 2103, the County collected groundwater and surface water elevation data at sixty-five (65) points across the site, including twenty eight (28) surficial aquifer wells, seven (7) upper Floridan (limestone) aquifer wells, twenty three (23) piezometers, and seven (7) surface water sites. The elevation data was collected on June 4, 2013. As previously discussed, piezometer P-5D was observed to be filled with sand approximately 15.6 feet below the top of casing. It appears that this piezometer has structurally failed and the County requests approval from the Department to properly abandon P-5D. Replacement of this data point does not appear to be necessary.

No significant changes to the patterns of flow in the surficial aquifer were noted in the June data set and the diagram is consistent with the observations over the period of record. The general direction of flow within the surficial aquifer has historically been to the west northwest across the Southeast County Landfill site. The elevations observed within the wells closest to the sinkhole indicate that flow patterns may be somewhat affected, which would not be unexpected. However, the overall direction of flow within the surficial remains toward the west/northwest across the site.

A contour diagram of the upper Floridan / Limestone aquifer has been prepared for the general area around the sinkhole and is included with this submittal. For the month of June, the elevation change between TH-72 and TH-76 is only 0.04 ft., and the change between TH-72 and TH-77 is only 0.16 ft. Contouring of these three wells, indicates that flow is to the north/northwest, but at what appears to be a very slow rate. When the other upper Floridan / Limestone aquifer monitoring wells located at the SCLF are included, the contouring process becomes difficult, and inconclusive. Therefore for this event we have contoured the flow utilizing just the three points closest to the sinkhole. We will continue to evaluate the flow direction with the upper Floridan / Limestone aquifer, and a more comprehensive understanding of this system will be developed over time.

Conclusions

The water quality observed in the June 2013 sampling event continues to indicate Upper Floridan / Limestone well, TH-72 which is closest to the sinkhole continues to exhibit minor changes in water quality. Based on the proximity of the wells and the trends observed, it is apparent that these impacts are likely attributable to the waste within the sinkhole and the fluids introduced during the grouting activities. The impacts observed in the upper Floridan aquifer monitoring well, TH-72, continue to exhibit elevated concentrations of conductivity, TDS, chloride, ammonia, iron and sodium. These impacts are not unexpected within the upper Floridan / Limestone aquifer in the immediate vicinity of the sinkhole feature. The two new upper Floridan / Limestone aquifer monitoring wells, TH-76 and TH-77 exhibit good water quality with no evidence of impact. Conductivity values, TDS, chloride and ammonia are all very low and consistent with the historical data set for the unaffected UFA monitoring wells at the SCLF.

Mr. John Morris, P.G.
July 29, 2013
Page 4

Recommendations

The County continues to move forward with the optimized IAMP, which includes the monthly sampling of three upper Floridan / Limestone aquifer monitoring wells, TH-72, TH-76, and TH-77, and the quarterly sampling of the three surficial aquifer monitoring wells, TH-73, TH-74, and TH-75. We will continue to evaluate any water quality changes in both the surficial and upper Floridan wells, and present the findings in the monthly IAMP report.


Enclosed for your review please find a site location map depicting the monitoring wells sampled, the water quality data summary table for the June 2013 sampling event, a groundwater elevation data table, groundwater contour and flow diagrams for the surficial and upper Floridan / Limestone aquifers, the historical data tables for each well sampled this month, and the complete analytical data report from our contracted laboratory, Test America, Inc.

Should you have any questions or require any additional information please feel free to call me at (813) 663-3221.


Respectfully submitted,

David S. Adams 7/29/2013

David S. Adams, P.G
Environmental Manager
Public Utilities Department



xc: John Lyons, Director, Public Utilities Department
Patricia Berry, Public Utilities Department
Andy Berry, Public Utilities Department
Larry Ruiz, Public Utilities Department
Michelle Van Dyk, Public Utilities Department
Richard Tedder, FDEP Tallahassee
Clark Moore, FDEP Tallahassee
Jeff Greenwell, FDEP Southwest District
Susan Pelz, FDEP Southwest District
Steve Morgan, FDEP, Southwest District
Andy Schipfer, EPC
Ernest Ely, WMI
Brian Miller, DOH
Rich Siemering, HDR
Joe O'Neill, CDS

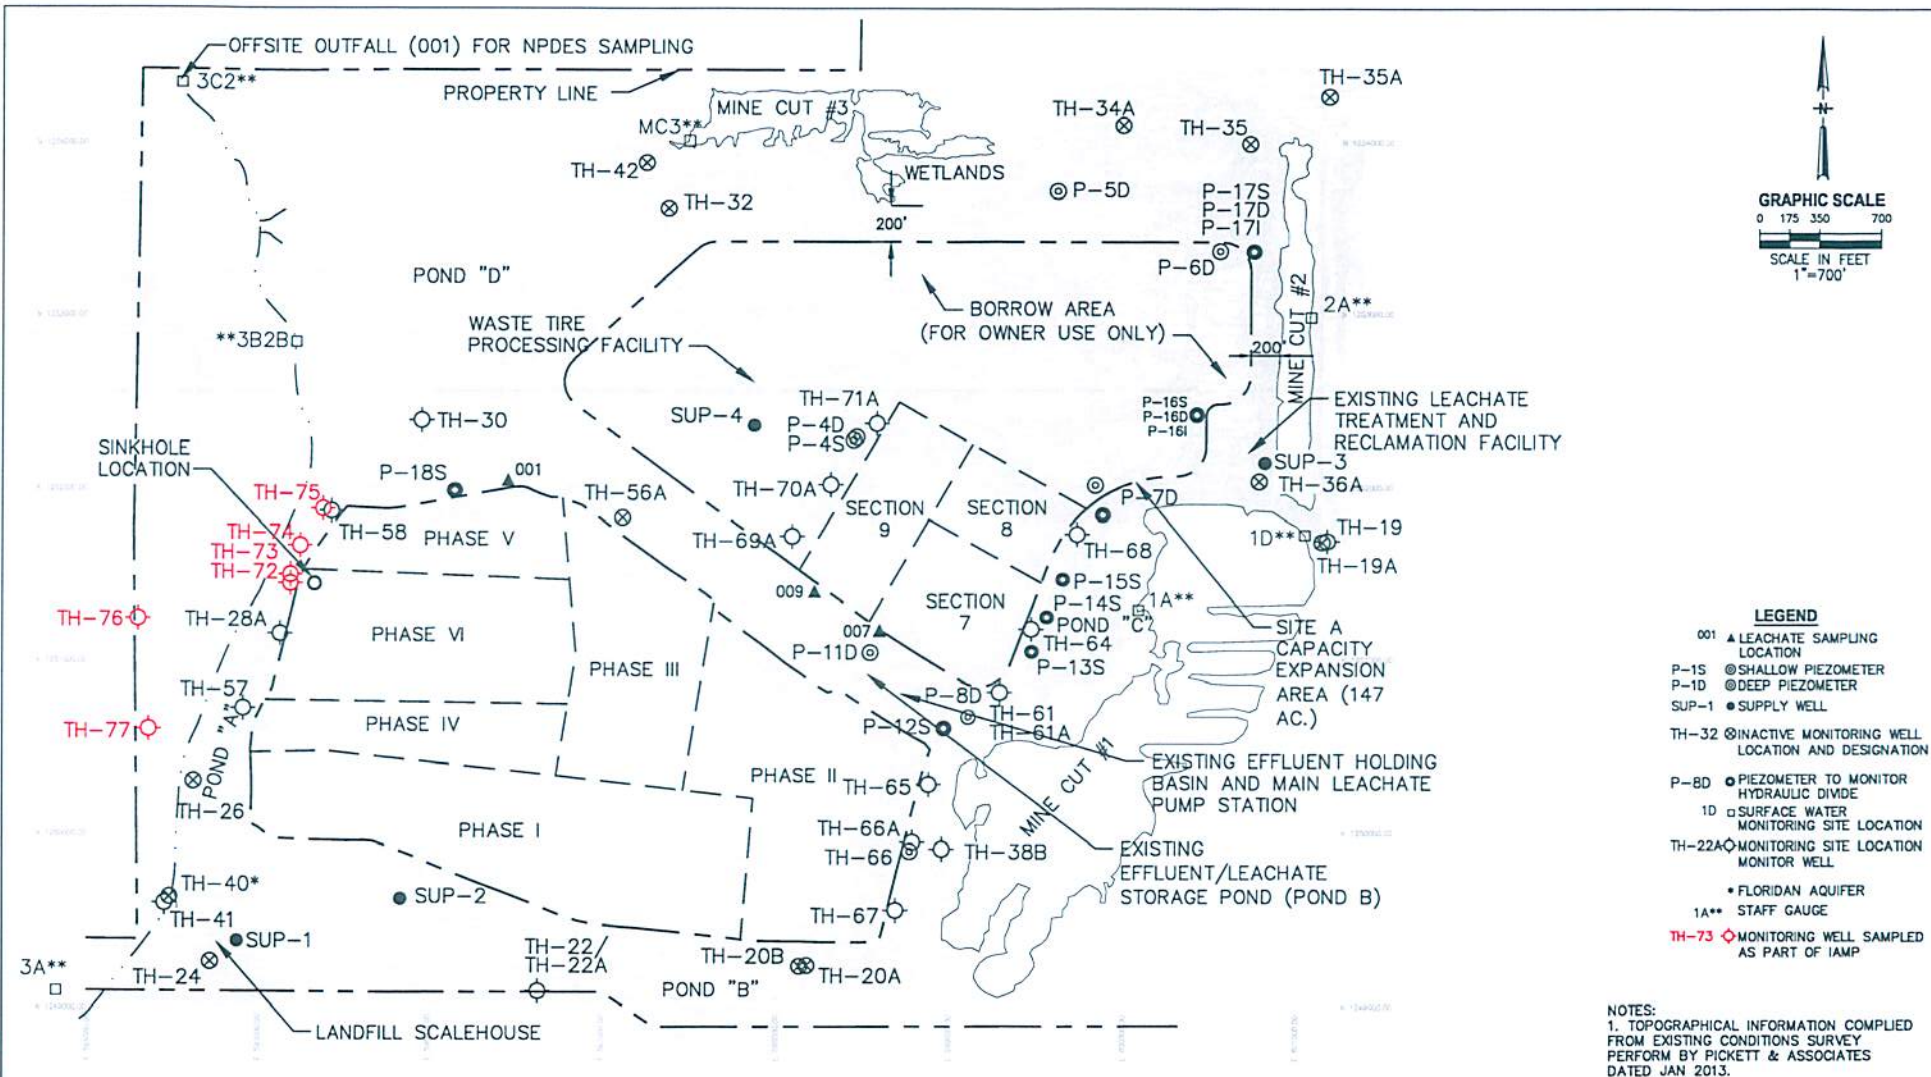

SHEET TITLE

**IAMP WELL LOCATIONS
SOUTHEAST COUNTY LANDFILL
HILLSBOROUGH COUNTY, FLORIDA**


PROJECT NUMBER	REFERENCE SHEET
SCALE	DRAWING NAME
DATE MAY, 2013	EXHIBIT NUMBER 1

**Southeast County Landfill
Laboratory Analytical Data
Upper Floridan Groundwater Monitoring Wells
June 5, 2013**


GENERAL	Upper Floridan Wells			(MCL) STANDARD
PARAMETERS	TH-72	TH-76	TH-77	
conductivity (umhos/cm) (field)	1440	401	384	NS
dissolved oxygen (mg/l) (field)	0.31	0.27	0.56	NS
pH (field)	7.13	7.86	7.86	(6.5 - 8.5)**
temperature (°C) (field)	23.30	22.90	23.59	NS
turbidity (NTU) (field)	0.27	16.2	35.4	NS
total dissolved solids (mg/l)	850	240	230	500**
chloride (mg/l)	290	13	8.9	250**
ammonia nitrogen (mg/l as N)	8.4	0.51	0.42	2.8***
				(MCL) STANDARD
Metals: (mg/l)	TH-72	TH-76	TH-77	
arsenic	0.004 <i>u</i>	0.004 <i>u</i>	0.004 <i>u</i>	0.01*
iron	0.82	0.66	0.89	0.3**
sodium	120	22	18	160*
Note: Ref. Groundwater Guidance Concentrations, FDEP 2012 MCL=MAXIMUM CONTAMINANT LEVEL BDL=BELOW DETECTION LIMIT NTU=NEPHELOMETRIC TURBIDITY UNITS <i>u</i> = parameter was analyzed but not detected. *=DENOTES PRIMARY DRINKING WATER STANDARD **=DENOTES SECONDARY DRINKING WATER STANDARD ***=DENOTES GROUNDWATER CLEANUP TARGET LEVELS				
	850			
ug/l=MICROGRAMS PER LITER				
mg/l=MILLIGRAMS PER LITER				
NS=NO STANDARD				

Southeast County Landfill
Groundwater and Surface Water Elevations
June 4, 2013

Measuring Point I.D.	T.O.C. Elevations (NGVD)	06/04/2013 W.L. B.T.O.C.	W.L. (NGVD)	Time
P-4D	140.78	23.30	117.48	11:14 AM
P-4S	140.95	Dry	ND	11:12 AM
P-5D	151.94	ND	ND	12:00 PM
P-6D-A	148.01	29.39	118.62	11:56 AM
P-7D	138.92	19.35	119.57	12:19 PM
P-8D	138.34	19.38	118.96	12:46 PM
P-11D	138.02	18.97	119.05	11:01 AM
P-12S	134.97	15.72	119.25	12:49 PM
P-13S	140.21	19.95	120.26	12:40 PM
P-14S	138.56	18.91	119.65	12:34 PM
P-15S	139.19	19.94	119.25	12:25 PM
P-16S	143.38	16.44	126.94	11:45 AM
P-16I	144.15	25.42	118.73	11:44 AM
P-16D	143.84	25.15	118.69	11:42 AM
P-17S	137.35	17.90	119.45	11:52 AM
P-17I	137.32	18.67	118.65	11:51 AM
P-17D	137.22	18.64	118.58	11:50 AM
P-18S	129.86	19.16	110.70	10:38 AM
P-19	133.36	16.06	117.30	12:04 PM
P-20	132.38	13.99	118.39	11:37 AM
P-21	122.79	4.81	117.98	11:27 AM
P-22	128.35	10.36	117.99	11:30 AM
P-23	143.13	24.97	118.16	11:22 AM
TH-19*	130.27	109.41	20.86	12:14 PM
TH-20A	131.86	10.80	121.06	1:05 PM
TH-20B	132.57	11.86	120.71	1:03 PM
TH-22	128.82	5.64	123.18	9:09 AM
TH-22A	129.27	6.21	123.06	9:10 AM
TH-24A	128.23	6.03	122.20	9:12 AM
TH-28A	131.10	28.42	102.68	9:41 AM
TH-30	128.88	24.14	104.74	9:50 AM
TH-32	129.90	16.32	113.58	10:32 AM
TH-35	145.98	29.69	116.29	12:06 PM
TH-36A	152.70	34.19	118.51	12:16 PM
TH-38A	130.68	11.43	119.25	12:57 PM
TH-38B	131.81	12.29	119.52	12:56 PM
TH-40*	124.99	105.04	19.95	9:24 AM
TH-41*	125.00	110.34	14.66	9:21 AM
TH-42*	116.74	84.28	32.46	10:29 AM
TH-57	128.36	19.81	108.55	9:27 AM
TH-58	127.88	28.32	99.56	9:45 AM
TH-61	138.73	18.71	120.02	12:42 PM
TH-61A	139.45	19.49	119.96	12:44 PM
TH-64	139.64	18.98	120.66	12:37 PM
TH-65	135.40	15.86	119.54	12:50 PM
TH-66	130.58	10.49	120.09	12:53 PM
TH-66A	130.66	10.95	119.71	12:52 PM
TH-67	129.51	6.49	123.02	1:00 PM
TH-68	140.01	20.51	119.50	12:28 PM
TH-69A	144.97	26.71	118.26	10:54 AM
TH-70A	146.63	26.86	119.77	11:10 AM
TH-71A	146.95	28.58	118.37	11:19 AM
TH-72	130.96	109.62	21.34	9:36 AM
TH-73	131.07	31.14	99.93	9:38 AM
TH-74	109.08	9.91	99.17	9:32 AM
TH-75	106.92	7.85	99.07	9:34 AM
TH-76	111.21	89.91	21.30	10:06 AM
TH-77	119.88	98.38	21.50	10:00 AM
SW-3A	3.0'=125.53'	0.20	122.73	9:04 AM
SW-3B2B	3.0'=97.97'	1.40	96.37	9:55 AM
SW-3C2	6.0'=92.33'	1.30	87.63	10:16 AM
Mine Cut #1	4.0'=122.14'	1.46	119.60	12:32 PM
Mine Cut #2	6.0'=123.47'	1.38	118.85	12:10 PM
Mine Cut #3	4.0'=112.27'	1.94	110.21	10:25 AM
Mine Cut #4	5.0'=97.54'	1.72	94.26	10:21 AM
NGVD = National Geodetic Vertical Datum				
T.O.C. = Top of Casing				
B.T.O.C. = Below Top of Casing				
* = Floridan Well				
ND = No Data				
W.L. = Water Level				

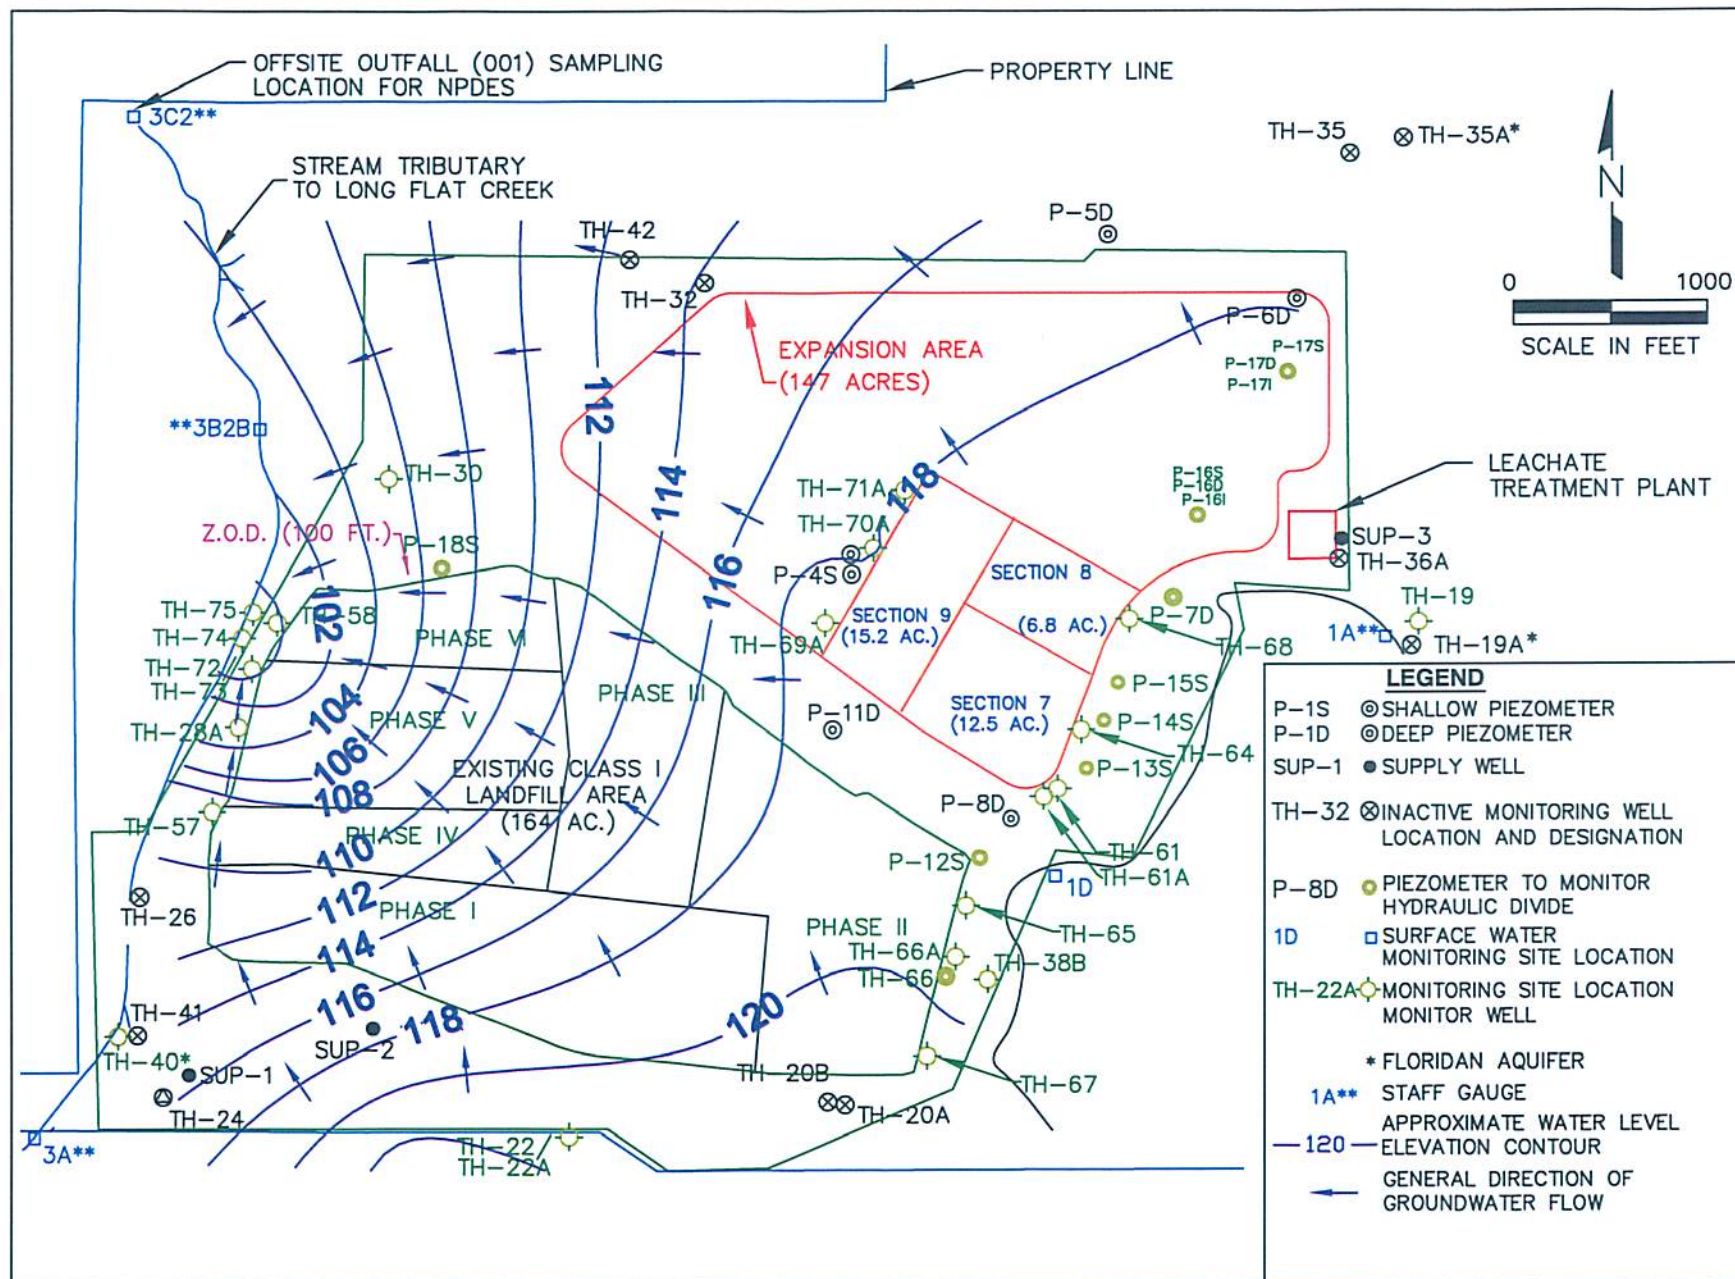

Southeast County Landfill
Groundwater Elevation Contour Diagram – June 4, 2013

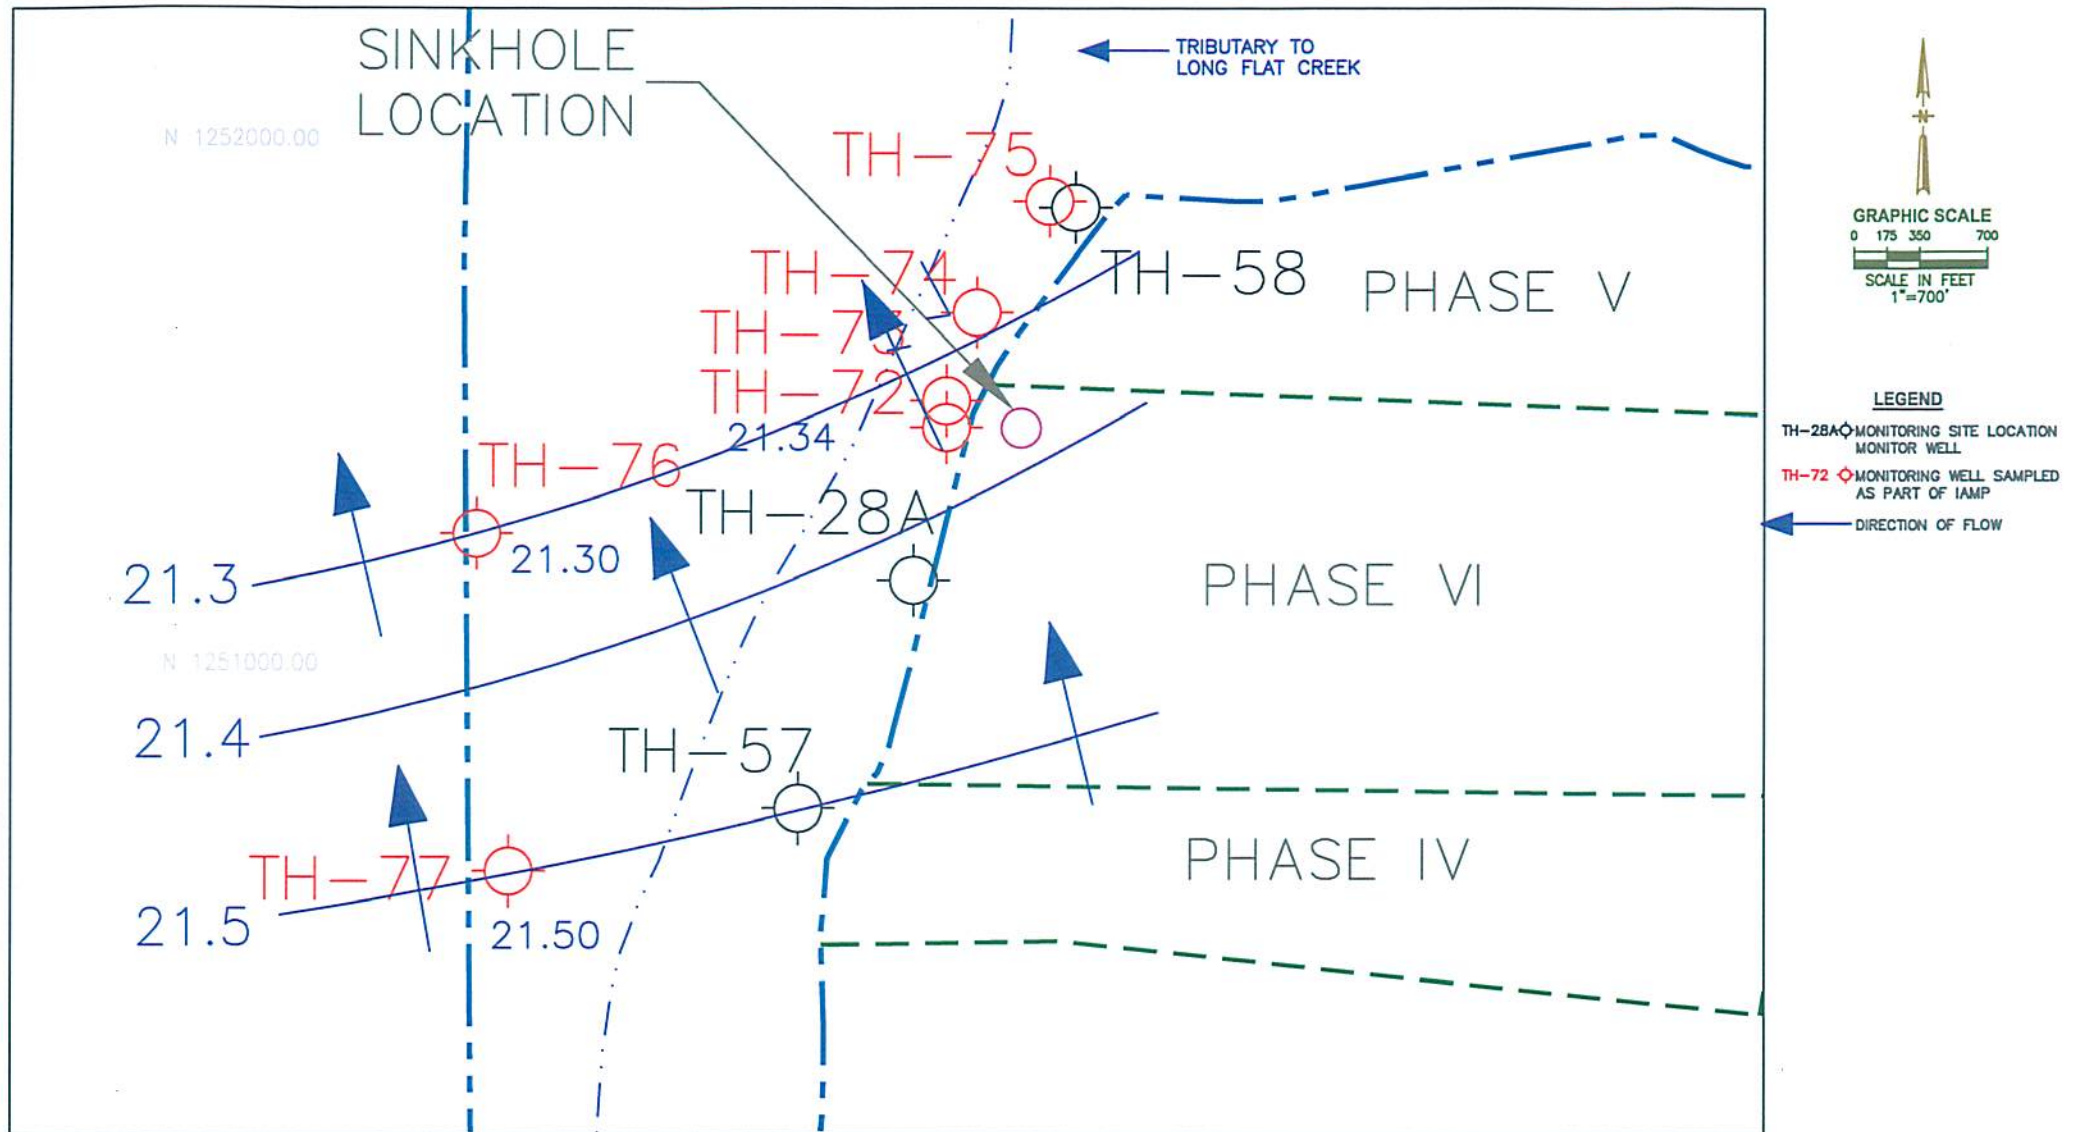

JUNE 2013

UPPER FLORIDAN / LIMESTONE AQUIFER CONTOUR DIAGRAM
IN THE VICINITY OF THE FORMER SINKHOLE
SOUTHEAST COUNTY LANDFILL
HILLSBOROUGH COUNTY, FLORIDA

Hillsborough County Southeast Landfill
Laboratory Analytical Results from IAMP Groundwater Monitoring
TH-72

Date	Depth to Water (feet)	Water Table Elevation (NGVD)	conductivity (umhos/cm) (field)	dissolved oxygen (mg/l) (field)	pH (field)	temperature (°C) (field)	turbidity (NTU) (field)	total dissolved solids (mg/l)	chloride (mg/l)	ammonia nitrogen (mg/l as N)	arsenic (mg/l)	iron (mg/l)	sodium (mg/l)
01/27/2011	115.69	15.27	551	0.39	7.43	22.88	3.2	320	32	0.22	0.004 u	0.52	32
02/03/2011	112.18	18.78	565	1.09	7.38	22.95	9.9	300	32	0.21	0.004 u	0.62	27
02/10/2011	109.80	21.16	514	1.58	7.34	22.65	3.2	340	31	0.28	0.004 u	0.54	31
02/14/2011	108.18	22.78	483	1.15	7.36	22.7	3.5	320	32	0.24	0.0013 u	0.58	32
02/24/2011	111.71	19.25	513	0.19	7.34	22.85	1	350	32	0.22	0.004 u	0.53	31
03/03/2011	111.88	19.08	579	0.77	7.35	22.8	0.8	330	31	0.23	0.004 u	0.43	32
03/10/2011	113.65	17.31	551	1.26	7.41	22.73	0.9	320	30	0.18	0.004 u	0.35	31
03/17/2011	112.85	18.11	388	1.05	7.34	22.9	0.9	330	30	0.31	0.004 u	0.25	31
03/24/2011	114.33	16.63	1192	1.5	7.58	23.1	1.5	1,100	350	9	0.004 u	0.64	130
04/01/2011	115.70	15.26	928	0.16	7.41	22.8	3.6	520	110	2	0.004 u	0.24	59
04/08/2011	112.10	18.86	810	0.92	7.35	23.13	6.1	420	87	1.9	0.004 u	0.22	51
05/05/2011	116.21	14.75	609	0.71	7.67	23.01	6.6	320	33	0.3	0.004 u	0.27	37
06/08/2011	119.19	11.77	607	0.71	7.65	23.35	4.51	340	32	0.57	0.004 u	0.2	34
07/07/2011	113.30	17.66	606	0.72	7.4	23.25	3.94	150	64	2.1	0.004 u	7.9	27
08/04/2011	103.31	27.65	564	0.33	7.29	23.18	0.4	360	33	0.21	0.004 u	0.18 i	34
09/08/2011	97.99	32.97	536	1.11	7.29	23.2	0.6	340	34	0.41	0.004 u	0.18 i	36
10/04/2011	99.45	31.51	471	1.69	7.31	23.13	1.1	290	31	0.3	0.004 u	0.14 i	34
11/03/2011	103.37	27.59	550	1.8	7.28	23.04	1.51	290	32	0.29	0.004 u	0.15 i	34
12/08/2011	106.80	24.16	528	1.92	7.31	22.9	0.73	320	29	0.32	0.004 u	0.13 i	33
01/05/2012	113.08	17.88	535	0.2	7.23	22.74	0.44	330	32	0.29	0.004 u	0.097 i	31
02/10/2012	113.86	17.10	511	0.94	7.3	22.89	1.39	310	28	0.28	0.004 u	0.13 i	30
03/07/2012	121.00	9.96	575	0.27	7.15	23.23	0.5	310	25	0.22	0.004 u	0.11 i	31
04/05/2012	124.96	6.00	522	1.09	7.08	23.18	0.65	280	28	0.41	0.004 u	0.11 i	29
05/03/2012	126.55	4.41	746	1.6	6.9	23.46	0.81	380	72	2.3	0.004 u	0.54	49
06/07/2012	120.46	10.50	641	0.72	7.07	23.4	0.26	370	46	1	0.004 u	0.23	37
07/05/2012	104.95	26.01	900	0.23	6.54	23.52	0.4	650	190	2.9 j3	0.004 u	0.39	70
08/03/2012	98.26	32.70	843	0.69	6.77	23.6	2.23	730	210	3	0.004 u	0.48	78
09/06/2012	91.18	39.66	2,357	0.2	6.51	23.62	1.05	1,300	570	12	0.004 u	1.1	170
10/04/2012	90.19	40.77	1,654	0.6	6.43	23.22	0.46	1,500	650	25	0.004 u	1.9	210
11/07/2012	99.29	31.67	2,488	0.76	6.58	23.03	0.74	1,400	540	15	0.004 u	1.4	180
12/05/2012	101.82	29.14	2,416	0.23	6.49	23.18	0.45	1,300	540	13	0.004 u	1.3	180 j3
01/03/2013	100.65	30.31	2,430	1.1	6.44	23.09	0.42	1,400	500	15	0.004 u	1.3	170 j3
02/07/2013	105.58	25.38	2,206	0.6	6.5	23.1	0.22	1,100	470	13	0.004 u	1.1	160
03/07/2013	110.00	20.96	1,234	0.3	6.61	22.85	0.41	770	290	11	0.004 u	1.1	110
04/04/2013	111.35	19.61	1,252	0.33	6.74	23.15	9.9	870	260	10	0.004 u	1	100
05/02/2013	109.56	21.40	1,615	0.18	6.83	23.16	0.45	810	300	8.6	0.004 u	0.87	110

New survey data beginning with 10/4/2012.

u = parameter was analyzed but not detected

i = reported value is between the laboratory method detection limit and the laboratory practical quantitation limit.

j3 = estimated value; value may not be accurate. Spike recovery or RPD outside of criteria.

1,100

EXCEEDS STANDARD

Hillsborough County Southeast Landfill
Laboratory Analytical Results from IAMP Groundwater Monitoring
TH-76

Date	Depth to Water (feet)	Water Table Elevation (NGVD)	conductivity (umhos/cm) (field)	dissolved oxygen (mg/l) (field)	pH (field)	temperature (°C) (field)	turbidity (NTU) (field)	total dissolved solids (mg/l)	chloride (mg/l)	ammonia nitrogen (mg/l as N)	arsenic (mg/l)	iron (mg/l)	sodium (mg/l)
05/02/2013	89.83	21.38	450	0.22	7.63	22.81	36.9	220	13	0.4	0.004 u	1.1	20

1.1

EXCEEDS STANDARD

Hillsborough County Southeast Landfill
Laboratory Analytical Results from IAMP Groundwater Monitoring
TH-77

Date	Depth to Water (feet)	Water Table Elevation (NGVD)	conductivity (umhos/cm) (field)	dissolved oxygen (mg/l) (field)	pH (field)	temperature (°C) (field)	turbidity (NTU) (field)	total dissolved solids (mg/l)	chloride (mg/l)	ammonia nitrogen (mg/l as N)	arsenic (mg/l)	iron (mg/l)	sodium (mg/l)
05/02/2013	98.31	21.57	440	0.57	7.39	23.39	59.4	190	9.4	0.39	0.004 u	1.2	17

1.2

EXCEEDS STANDARD

TestAmerica

THE LEADER IN ENVIRONMENTAL TESTING

ANALYTICAL REPORT

TestAmerica Laboratories, Inc.

TestAmerica Tampa
6712 Benjamin Road
Suite 100
Tampa, FL 33634
Tel: (813)885-7427

TestAmerica Job ID: 660-54741-1

Client Project/Site: SELF-IAMP Monitoring Wells

For:

Hillsborough County Public Utilities Dep
Solid Waste Management Group
Brandon Support Operations Complex
332 North Falkenburg Rd, 2nd Floor
Tampa, Florida 33619

Attn: David Adams



Authorized for release by:
6/20/2013 8:33:09 AM

Nancy Robertson, Project Manager II
nancy.robertson@testamericainc.com

LINKS

Review your project
results through
TotalAccess

Have a Question?



Visit us at:
www.testamericainc.com

The test results in this report meet all 2003 NELAC and 2009 TNI requirements for accredited parameters, exceptions are noted in this report. This report may not be reproduced except in full, and with written approval from the laboratory. For questions please contact the Project Manager at the e-mail address or telephone number listed on this page.

This report has been electronically signed and authorized by the signatory. Electronic signature is intended to be the legally binding equivalent of a traditionally handwritten signature.

Results relate only to the items tested and the sample(s) as received by the laboratory.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15

Table of Contents

Cover Page 1

Table of Contents 2

Sample Summary 3

Case Narrative 4

Definitions/Glossary 5

Detection Summary 6

Client Sample Results 7

QC Sample Results 11

QC Association Summary 14

Lab Chronicle 16

Method Summary 18

Certification Summary 19

Chain of Custody 21

Field Data Sheets 23

Receipt Checklists 26



Sample Summary

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Lab Sample ID	Client Sample ID	Matrix	Collected	Received
660-54741-1	BLANK EQUIPMENT 54741	Ground Water	06/05/13 09:25	06/05/13 15:56
660-54741-2	TH-77	Ground Water	06/05/13 10:07	06/05/13 15:56
660-54741-3	TH-76	Ground Water	06/05/13 11:15	06/05/13 15:56
660-54741-4	TH-72	Ground Water	06/05/13 12:18	06/05/13 15:56

Case Narrative

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Job ID: 660-54741-1

Laboratory: TestAmerica Tampa

Narrative

Job Narrative
660-54741-1

Comments

No additional comments.

Receipt

The samples were received on 6/5/2013 3:56 PM; the samples arrived in good condition, properly preserved and, where required, on ice. The temperature of the cooler at receipt was 3.7° C.

Metals

No analytical or quality issues were noted.

General Chemistry

No analytical or quality issues were noted.

Definitions/Glossary

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Qualifiers

HPLC/IC

Qualifier	Qualifier Description
U	Indicates that the compound was analyzed for but not detected.

Metals

Qualifier	Qualifier Description
U	Indicates that the compound was analyzed for but not detected.

General Chemistry

Qualifier	Qualifier Description
U	Indicates that the compound was analyzed for but not detected.
I	The reported value is between the laboratory method detection limit and the laboratory practical quantitation limit.

Glossary

Abbreviation	These commonly used abbreviations may or may not be present in this report.
α	Listed under the "D" column to designate that the result is reported on a dry weight basis
%R	Percent Recovery
CNF	Contains no Free Liquid
DER	Duplicate error ratio (normalized absolute difference)
DL, RA, RE, IN	Indicates a Dilution, Re-analysis, Re-extraction, or additional Initial metals/anion analysis of the sample
DLC	Decision level concentration
MDA	Minimum detectable activity
EDL	Estimated Detection Limit
MDC	Minimum detectable concentration
MDL	Method Detection Limit
ML	Minimum Level (Dioxin)
NC	Not Calculated
ND	Not detected at the reporting limit (or MDL or EDL if shown)
PQL	Practical Quantitation Limit
QC	Quality Control
RER	Relative error ratio
RL	Reporting Limit or Requested Limit (Radiochemistry)
RPD	Relative Percent Difference, a measure of the relative difference between two points
TEF	Toxicity Equivalent Factor (Dioxin)
TEQ	Toxicity Equivalent Quotient (Dioxin)

Detection Summary

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Client Sample ID: BLANK EQUIPMENT 54741

Lab Sample ID: 660-54741-1

Analyte	Result	Qualifier	PQL	MDL	Unit	Dil	Fac	D	Method	Prep Type
Sodium	0.52		0.50	0.31	mg/L	1			6010B	Total
Ammonia as N	0.037	I	0.050	0.026	mg/L	1			350.1	Recoverable Total/NA

Client Sample ID: TH-77

Lab Sample ID: 660-54741-2

Analyte	Result	Qualifier	PQL	MDL	Unit	Dil	Fac	D	Method	Prep Type
Chloride	8.9		0.50	0.25	mg/L	1			300.0	Total/NA
Iron	890		200	50	ug/L	1			6010B	Total
Sodium	18		0.50	0.31	mg/L	1			6010B	Recoverable Total
Ammonia as N	0.42		0.050	0.026	mg/L	1			350.1	Total/NA
Total Dissolved Solids	230		10	10	mg/L	1			SM 2540C	Total/NA
Field pH	7.86				SU	1			Field Sampling	Total/NA
Field Temperature	23.59				Degrees C	1			Field Sampling	Total/NA
Oxygen, Dissolved	0.56				mg/L	1			Field Sampling	Total/NA
Specific Conductance	384				uS/cm	1			Field Sampling	Total/NA
Turbidity	35.4				NTU	1			Field Sampling	Total/NA

Client Sample ID: TH-76

Lab Sample ID: 660-54741-3

Analyte	Result	Qualifier	PQL	MDL	Unit	Dil	Fac	D	Method	Prep Type
Chloride	13		0.50	0.25	mg/L	1			300.0	Total/NA
Iron	660		200	50	ug/L	1			6010B	Total
Sodium	22		0.50	0.31	mg/L	1			6010B	Recoverable Total
Ammonia as N	0.51		0.050	0.026	mg/L	1			350.1	Total/NA
Total Dissolved Solids	240		10	10	mg/L	1			SM 2540C	Total/NA
Field pH	7.86				SU	1			Field Sampling	Total/NA
Field Temperature	22.90				Degrees C	1			Field Sampling	Total/NA
Oxygen, Dissolved	0.27				mg/L	1			Field Sampling	Total/NA
Specific Conductance	401				uS/cm	1			Field Sampling	Total/NA
Turbidity	16.2				NTU	1			Field Sampling	Total/NA

Client Sample ID: TH-72

Lab Sample ID: 660-54741-4

Analyte	Result	Qualifier	PQL	MDL	Unit	Dil	Fac	D	Method	Prep Type
Chloride	290		5.0	2.5	mg/L	10			300.0	Total/NA
Iron	820		200	50	ug/L	1			6010B	Total
Sodium	120		0.50	0.31	mg/L	1			6010B	Recoverable Total
Ammonia as N	8.4		0.25	0.13	mg/L	5			350.1	Total/NA
Total Dissolved Solids	850		25	25	mg/L	1			SM 2540C	Total/NA
Field pH	7.13				SU	1			Field Sampling	Total/NA
Field Temperature	23.30				Degrees C	1			Field Sampling	Total/NA
Oxygen, Dissolved	0.31				mg/L	1			Field Sampling	Total/NA
Specific Conductance	1440				uS/cm	1			Field Sampling	Total/NA
Turbidity	0.27				NTU	1			Field Sampling	Total/NA

This Detection Summary does not include radiochemical test results.

TestAmerica Tampa

Client Sample Results

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Client Sample ID: BLANK EQUIPMENT 54741

Lab Sample ID: 660-54741-1

Date Collected: 06/05/13 09:25

Matrix: Ground Water

Date Received: 06/05/13 15:56

Method: 300.0 - Anions, Ion Chromatography

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	0.25	U	0.50	0.25	mg/L			06/11/13 20:46	1

Method: 6010B - Metals (ICP) - Total Recoverable

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Arsenic	4.0	U	10	4.0	ug/L		06/07/13 13:15	06/12/13 10:18	1
Iron	50	U	200	50	ug/L		06/07/13 13:15	06/12/13 10:18	1
Sodium	0.52		0.50	0.31	mg/L		06/07/13 13:15	06/12/13 10:18	1

General Chemistry

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Ammonia as N	0.037	I	0.050	0.026	mg/L			06/11/13 13:46	1
Total Dissolved Solids	5.0	U	5.0	5.0	mg/L			06/12/13 12:42	1

Client Sample Results

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Client Sample ID: TH-77

Date Collected: 06/05/13 10:07

Date Received: 06/05/13 15:56

Lab Sample ID: 660-54741-2

Matrix: Ground Water

Method: 300.0 - Anions, Ion Chromatography

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	8.9		0.50	0.25	mg/L			06/11/13 20:58	1

Method: 6010B - Metals (ICP) - Total Recoverable

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Arsenic	4.0	U	10	4.0	ug/L		06/07/13 13:15	06/12/13 10:21	1
Iron	890		200	50	ug/L		06/07/13 13:15	06/12/13 10:21	1
Sodium	18		0.50	0.31	mg/L		06/07/13 13:15	06/12/13 10:21	1

General Chemistry

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Ammonia as N	0.42		0.050	0.026	mg/L			06/11/13 13:46	1
Total Dissolved Solids	230		10	10	mg/L			06/12/13 12:42	1

Method: Field Sampling - Field Sampling

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Field pH	7.86				SU			06/05/13 10:07	1
Field Temperature	23.59				Degrees C			06/05/13 10:07	1
Oxygen, Dissolved	0.56				mg/L			06/05/13 10:07	1
Specific Conductance	384				uS/cm			06/05/13 10:07	1
Turbidity	35.4				NTU			06/05/13 10:07	1

TestAmerica Tampa

Client Sample Results

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Client Sample ID: TH-76

Date Collected: 06/05/13 11:15

Date Received: 06/05/13 15:56

Lab Sample ID: 660-54741-3

Matrix: Ground Water

Method: 300.0 - Anions, Ion Chromatography

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	13		0.50	0.25	mg/L			06/11/13 21:11	1

Method: 6010B - Metals (ICP) - Total Recoverable

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Arsenic	4.0	U	10	4.0	ug/L		06/07/13 13:15	06/12/13 10:25	1
Iron	660		200	50	ug/L		06/07/13 13:15	06/12/13 10:25	1
Sodium	22		0.50	0.31	mg/L		06/07/13 13:15	06/12/13 10:25	1

General Chemistry

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Ammonia as N	0.51		0.050	0.026	mg/L			06/11/13 13:47	1
Total Dissolved Solids	240		10	10	mg/L			06/12/13 12:42	1

Method: Field Sampling - Field Sampling

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Field pH	7.86				SU			06/05/13 11:15	1
Field Temperature	22.90				Degrees C			06/05/13 11:15	1
Oxygen, Dissolved	0.27				mg/L			06/05/13 11:15	1
Specific Conductance	401				uS/cm			06/05/13 11:15	1
Turbidity	16.2				NTU			06/05/13 11:15	1

TestAmerica Tampa

Client Sample Results

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Client Sample ID: TH-72

Date Collected: 06/05/13 12:18

Date Received: 06/05/13 15:56

Lab Sample ID: 660-54741-4

Matrix: Ground Water

Method: 300.0 - Anions, Ion Chromatography

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	290		5.0	2.5	mg/L			06/11/13 21:23	10

Method: 6010B - Metals (ICP) - Total Recoverable

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Arsenic	4.0	U	10	4.0	ug/L		06/07/13 13:15	06/12/13 10:28	1
Iron	820		200	50	ug/L		06/07/13 13:15	06/12/13 10:28	1
Sodium	120		0.50	0.31	mg/L		06/07/13 13:15	06/12/13 10:28	1

General Chemistry

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Ammonia as N	8.4		0.25	0.13	mg/L			06/11/13 14:36	5
Total Dissolved Solids	850		25	25	mg/L			06/12/13 12:42	1

Method: Field Sampling - Field Sampling

Analyte	Result	Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Field pH	7.13				SU			06/05/13 12:18	1
Field Temperature	23.30				Degrees C			06/05/13 12:18	1
Oxygen, Dissolved	0.31				mg/L			06/05/13 12:18	1
Specific Conductance	1440				uS/cm			06/05/13 12:18	1
Turbidity	0.27				NTU			06/05/13 12:18	1

TestAmerica Tampa

QC Sample Results

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Method: 300.0 - Anions, Ion Chromatography

Lab Sample ID: MB 680-280120/2

Matrix: Water

Analysis Batch: 280120

Client Sample ID: Method Blank

Prep Type: Total/NA

Analyte	MB Result	MB Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	0.25	U	0.50	0.25	mg/L			06/11/13 18:54	1

Lab Sample ID: LCS 680-280120/3

Matrix: Water

Analysis Batch: 280120

Client Sample ID: Lab Control Sample

Prep Type: Total/NA

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec. Limits
Chloride	10.0	9.76		mg/L		98	90 - 110

Lab Sample ID: LCSD 680-280120/4

Matrix: Water

Analysis Batch: 280120

Client Sample ID: Lab Control Sample Dup

Prep Type: Total/NA

Analyte	Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec. Limits	RPD	RPD Limit
Chloride	10.0	9.76		mg/L		98	90 - 110	0	30

Lab Sample ID: 640-43862-C-16 MS

Matrix: Water

Analysis Batch: 280120

Client Sample ID: Matrix Spike

Prep Type: Total/NA

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec. Limits
Chloride	2.6		40.0	42.1		mg/L		99	90 - 110

Lab Sample ID: 640-43862-C-16 MSD

Matrix: Water

Analysis Batch: 280120

Client Sample ID: Matrix Spike Duplicate

Prep Type: Total/NA

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec. Limits	RPD	RPD Limit
Chloride	2.6		40.0	42.7		mg/L		100	90 - 110	1	30

Method: 6010B - Metals (ICP)

Lab Sample ID: MB 660-138200/1-A

Matrix: Water

Analysis Batch: 138341

Client Sample ID: Method Blank

Prep Type: Total Recoverable

Prep Batch: 138200

Analyte	MB Result	MB Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Arsenic	4.0	U	10	4.0	ug/L		06/07/13 13:15	06/12/13 09:01	1
Iron	50	U	200	50	ug/L		06/07/13 13:15	06/12/13 09:01	1
Sodium	0.31	U	0.50	0.31	mg/L		06/07/13 13:15	06/12/13 09:01	1

Lab Sample ID: LCS 660-138200/2-A

Matrix: Water

Analysis Batch: 138341

Client Sample ID: Lab Control Sample

Prep Type: Total Recoverable

Prep Batch: 138200

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec. Limits
Arsenic	1000	1040		ug/L		104	80 - 120
Iron	1000	1070		ug/L		107	80 - 120
Sodium	10.0	10.5		mg/L		105	80 - 120

TestAmerica Tampa

QC Sample Results

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Method: 6010B - Metals (ICP) (Continued)

Lab Sample ID: 660-54753-F-1-B MS

Matrix: Water

Analysis Batch: 138341

Client Sample ID: Matrix Spike

Prep Type: Total Recoverable

Prep Batch: 138200

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec. Limits
Arsenic	4.0	U	1000	1030		ug/L		103	80 - 120
Iron	1900		1000	3090		ug/L		114	80 - 120
Sodium	5.8		10.0	15.8		mg/L		100	80 - 120

Lab Sample ID: 660-54753-F-1-C MSD

Matrix: Water

Analysis Batch: 138341

Client Sample ID: Matrix Spike Duplicate

Prep Type: Total Recoverable

Prep Batch: 138200

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec. Limits	RPD	RPD Limit
Arsenic	4.0	U	1000	1030		ug/L		103	80 - 120	0	20
Iron	1900		1000	3060		ug/L		111	80 - 120	1	20
Sodium	5.8		10.0	15.7		mg/L		99	80 - 120	1	20

Method: 350.1 - Nitrogen, Ammonia

Lab Sample ID: MB 680-279977/39

Matrix: Water

Analysis Batch: 279977

Client Sample ID: Method Blank

Prep Type: Total/NA

Analyte	MB Result	MB Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Ammonia as N	0.026	U	0.050	0.026	mg/L			06/11/13 15:15	1

Lab Sample ID: LCS 680-279977/24

Matrix: Water

Analysis Batch: 279977

Client Sample ID: Lab Control Sample

Prep Type: Total/NA

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec. Limits
Ammonia as N	1.00	0.995		mg/L		99	90 - 110

Lab Sample ID: LCSD 680-279977/26

Matrix: Water

Analysis Batch: 279977

Client Sample ID: Lab Control Sample Dup

Prep Type: Total/NA

Analyte	Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec. Limits	RPD	RPD Limit
Ammonia as N	1.00	0.960		mg/L		96	90 - 110	4	30

Lab Sample ID: 660-54708-A-1 MS

Matrix: Water

Analysis Batch: 279977

Client Sample ID: Matrix Spike

Prep Type: Total/NA

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec. Limits
Ammonia as N	0.19		1.00	1.14		mg/L		95	90 - 110

Lab Sample ID: 660-54708-A-1 MSD

Matrix: Water

Analysis Batch: 279977

Client Sample ID: Matrix Spike Duplicate

Prep Type: Total/NA

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec. Limits	RPD	RPD Limit
Ammonia as N	0.19		1.00	1.19		mg/L		100	90 - 110	4	30

TestAmerica Tampa

QC Sample Results

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Method: SM 2540C - Solids, Total Dissolved (TDS)

Lab Sample ID: MB 660-138353/1

Matrix: Water

Analysis Batch: 138353

Client Sample ID: Method Blank

Prep Type: Total/NA

Analyte	MB Result	MB Qualifier	PQL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total Dissolved Solids	5.0	U	5.0	5.0	mg/L			06/12/13 12:42	1

Lab Sample ID: LCS 660-138353/2

Matrix: Water

Analysis Batch: 138353

Client Sample ID: Lab Control Sample

Prep Type: Total/NA

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec. Limits
Total Dissolved Solids	10000	9890		mg/L		99	80 - 120

Lab Sample ID: 660-54741-4 DU

Matrix: Ground Water

Analysis Batch: 138353

Client Sample ID: TH-72

Prep Type: Total/NA

Analyte	Sample Result	Sample Qualifier	DU Result	DU Qualifier	Unit	D	RPD	RPD Limit
Total Dissolved Solids	850		890		mg/L		5	20

QC Association Summary

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

HPLC/IC

Analysis Batch: 280120

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
640-43862-C-16 MS	Matrix Spike	Total/NA	Water	300.0	
640-43862-C-16 MSD	Matrix Spike Duplicate	Total/NA	Water	300.0	
660-54741-1	BLANK EQUIPMENT 54741	Total/NA	Ground Water	300.0	
660-54741-2	TH-77	Total/NA	Ground Water	300.0	
660-54741-3	TH-76	Total/NA	Ground Water	300.0	
660-54741-4	TH-72	Total/NA	Ground Water	300.0	
LCS 680-280120/3	Lab Control Sample	Total/NA	Water	300.0	
LCSD 680-280120/4	Lab Control Sample Dup	Total/NA	Water	300.0	
MB 680-280120/2	Method Blank	Total/NA	Water	300.0	

Metals

Prep Batch: 138200

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
660-54741-1	BLANK EQUIPMENT 54741	Total Recoverable	Ground Water	3005A	
660-54741-2	TH-77	Total Recoverable	Ground Water	3005A	
660-54741-3	TH-76	Total Recoverable	Ground Water	3005A	
660-54741-4	TH-72	Total Recoverable	Ground Water	3005A	
660-54753-F-1-B MS	Matrix Spike	Total Recoverable	Water	3005A	
660-54753-F-1-C MSD	Matrix Spike Duplicate	Total Recoverable	Water	3005A	
LCS 660-138200/2-A	Lab Control Sample	Total Recoverable	Water	3005A	
MB 660-138200/1-A	Method Blank	Total Recoverable	Water	3005A	

Analysis Batch: 138341

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
660-54741-1	BLANK EQUIPMENT 54741	Total Recoverable	Ground Water	6010B	138200
660-54741-2	TH-77	Total Recoverable	Ground Water	6010B	138200
660-54741-3	TH-76	Total Recoverable	Ground Water	6010B	138200
660-54741-4	TH-72	Total Recoverable	Ground Water	6010B	138200
660-54753-F-1-B MS	Matrix Spike	Total Recoverable	Water	6010B	138200
660-54753-F-1-C MSD	Matrix Spike Duplicate	Total Recoverable	Water	6010B	138200
LCS 660-138200/2-A	Lab Control Sample	Total Recoverable	Water	6010B	138200
MB 660-138200/1-A	Method Blank	Total Recoverable	Water	6010B	138200

General Chemistry

Analysis Batch: 138353

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
660-54741-1	BLANK EQUIPMENT 54741	Total/NA	Ground Water	SM 2540C	
660-54741-2	TH-77	Total/NA	Ground Water	SM 2540C	
660-54741-3	TH-76	Total/NA	Ground Water	SM 2540C	
660-54741-4	TH-72	Total/NA	Ground Water	SM 2540C	
660-54741-4 DU	TH-72	Total/NA	Ground Water	SM 2540C	
LCS 660-138353/2	Lab Control Sample	Total/NA	Water	SM 2540C	
MB 660-138353/1	Method Blank	Total/NA	Water	SM 2540C	

Analysis Batch: 279977

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
660-54708-A-1 MS	Matrix Spike	Total/NA	Water	350.1	
660-54708-A-1 MSD	Matrix Spike Duplicate	Total/NA	Water	350.1	

TestAmerica Tampa

QC Association Summary

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

General Chemistry (Continued)

Analysis Batch: 279977 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
660-54741-1	BLANK EQUIPMENT 54741	Total/NA	Ground Water	350.1	
660-54741-2	TH-77	Total/NA	Ground Water	350.1	
660-54741-3	TH-76	Total/NA	Ground Water	350.1	
660-54741-4	TH-72	Total/NA	Ground Water	350.1	
LCS 680-279977/24	Lab Control Sample	Total/NA	Water	350.1	
LCSD 680-279977/26	Lab Control Sample Dup	Total/NA	Water	350.1	
MB 680-279977/39	Method Blank	Total/NA	Water	350.1	

Field Service / Mobile Lab

Analysis Batch: 138346

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
660-54741-2	TH-77	Total/NA	Ground Water	Field Sampling	
660-54741-3	TH-76	Total/NA	Ground Water	Field Sampling	
660-54741-4	TH-72	Total/NA	Ground Water	Field Sampling	

Lab Chronicle

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Client Sample ID: BLANK EQUIPMENT 54741

Date Collected: 06/05/13 09:25

Date Received: 06/05/13 15:56

Lab Sample ID: 660-54741-1

Matrix: Ground Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	300.0		1	280120	06/11/13 20:46	PAT	TAL SAV
Total Recoverable	Prep	3005A			138200	06/07/13 13:15	RG	TAL TAM
Total Recoverable	Analysis	6010B		1	138341	06/12/13 10:18	GF	TAL TAM
Total/NA	Analysis	SM 2540C		1	138353	06/12/13 12:42	TO	TAL TAM
Total/NA	Analysis	350.1		1	279977	06/11/13 13:46	JE	TAL SAV

Client Sample ID: TH-77

Date Collected: 06/05/13 10:07

Date Received: 06/05/13 15:56

Lab Sample ID: 660-54741-2

Matrix: Ground Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	300.0		1	280120	06/11/13 20:58	PAT	TAL SAV
Total Recoverable	Prep	3005A			138200	06/07/13 13:15	RG	TAL TAM
Total Recoverable	Analysis	6010B		1	138341	06/12/13 10:21	GF	TAL TAM
Total/NA	Analysis	SM 2540C		1	138353	06/12/13 12:42	TO	TAL TAM
Total/NA	Analysis	350.1		1	279977	06/11/13 13:46	JE	TAL SAV
Total/NA	Analysis	Field Sampling		1	138346	06/05/13 10:07		TAL TAM

Client Sample ID: TH-76

Date Collected: 06/05/13 11:15

Date Received: 06/05/13 15:56

Lab Sample ID: 660-54741-3

Matrix: Ground Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	300.0		1	280120	06/11/13 21:11	PAT	TAL SAV
Total Recoverable	Prep	3005A			138200	06/07/13 13:15	RG	TAL TAM
Total Recoverable	Analysis	6010B		1	138341	06/12/13 10:25	GF	TAL TAM
Total/NA	Analysis	SM 2540C		1	138353	06/12/13 12:42	TO	TAL TAM
Total/NA	Analysis	350.1		1	279977	06/11/13 13:47	JE	TAL SAV
Total/NA	Analysis	Field Sampling		1	138346	06/05/13 11:15		TAL TAM

Client Sample ID: TH-72

Date Collected: 06/05/13 12:18

Date Received: 06/05/13 15:56

Lab Sample ID: 660-54741-4

Matrix: Ground Water

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	300.0		10	280120	06/11/13 21:23	PAT	TAL SAV
Total Recoverable	Prep	3005A			138200	06/07/13 13:15	RG	TAL TAM
Total Recoverable	Analysis	6010B		1	138341	06/12/13 10:28	GF	TAL TAM
Total/NA	Analysis	SM 2540C		1	138353	06/12/13 12:42	TO	TAL TAM
Total/NA	Analysis	350.1		5	279977	06/11/13 14:36	JE	TAL SAV
Total/NA	Analysis	Field Sampling		1	138346	06/05/13 12:18		TAL TAM

TestAmerica Tampa

Lab Chronicle

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Laboratory References:

TAL SAV = TestAmerica Savannah, 5102 LaRoche Avenue, Savannah, GA 31404, TEL (912)354-7858
TAL TAM = TestAmerica Tampa, 6712 Benjamin Road, Suite 100, Tampa, FL 33634, TEL (813)885-7427

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15

Method Summary

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Method	Method Description	Protocol	Laboratory
300.0	Anions, Ion Chromatography	MCAWW	TAL SAV
6010B	Metals (ICP)	SW846	TAL TAM
350.1	Nitrogen, Ammonia	MCAWW	TAL SAV
SM 2540C	Solids, Total Dissolved (TDS)	SM	TAL TAM
Field Sampling	Field Sampling	EPA	TAL TAM

Protocol References:

EPA = US Environmental Protection Agency

MCAWW = "Methods For Chemical Analysis Of Water And Wastes", EPA-600/4-79-020, March 1983 And Subsequent Revisions.

SM = "Standard Methods For The Examination Of Water And Wastewater",

SW846 = "Test Methods For Evaluating Solid Waste, Physical/Chemical Methods", Third Edition, November 1986 And Its Updates.

Laboratory References:

TAL SAV = TestAmerica Savannah, 5102 LaRoche Avenue, Savannah, GA 31404, TEL (912)354-7858

TAL TAM = TestAmerica Tampa, 6712 Benjamin Road, Suite 100, Tampa, FL 33634, TEL (813)885-7427

Certification Summary

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Laboratory: TestAmerica Tampa

All certifications held by this laboratory are listed. Not all certifications are applicable to this report.

Authority	Program	EPA Region	Certification ID	Expiration Date
Alabama	State Program	4	40610	06-30-13
Florida	NELAP	4	E84282	06-30-13
Georgia	State Program	4	905	06-30-13
USDA	Federal		P330-11-00177	04-20-14

Laboratory: TestAmerica Savannah

All certifications held by this laboratory are listed. Not all certifications are applicable to this report.

Authority	Program	EPA Region	Certification ID	Expiration Date
A2LA	DoD ELAP		399.01	07-31-13
Alabama	State Program	4	41450	06-30-13
Alaska (UST)	State Program	10	UST-104	06-19-13
Arkansas DEQ	State Program	6	88-0692	02-01-13 *
California	NELAP	9	3217CA	07-31-13
Colorado	State Program	8	N/A	12-31-13
Connecticut	State Program	1	PH-0161	03-31-15
Florida	NELAP	4	E87052	06-30-13
GA Dept. of Agriculture	State Program	4	N/A	12-31-13
Georgia	State Program	4	N/A	06-30-13
Georgia	State Program	4	803	06-30-13
Hawaii	State Program	9	N/A	06-30-13
Illinois	NELAP	5	200022	11-30-13
Indiana	State Program	5	N/A	06-30-13
Iowa	State Program	7	353	07-01-13 *
Kentucky	State Program	4	90084	12-31-12 *
Kentucky (UST)	State Program	4	18	03-31-13 *
Louisiana	NELAP	6	30690	06-30-13
Louisiana	NELAP	6	LA100015	12-31-13
Maine	State Program	1	GA00006	08-16-14
Maryland	State Program	3	250	12-31-13
Massachusetts	State Program	1	M-GA006	06-30-13
Michigan	State Program	5	9925	06-30-13
Mississippi	State Program	4	N/A	06-30-13
Montana	State Program	8	CERT0081	01-01-14
Nebraska	State Program	7	TestAmerica-Savannah	06-30-13 *
New Jersey	NELAP	2	GA769	06-30-13
New Mexico	State Program	6	N/A	06-30-13
New York	NELAP	2	10842	04-01-14
North Carolina DENR	State Program	4	269	12-31-13
North Carolina DHHS	State Program	4	13701	07-31-13
Oklahoma	State Program	6	9984	08-31-13
Pennsylvania	NELAP	3	68-00474	06-30-13 *
Puerto Rico	State Program	2	GA00006	01-01-14
South Carolina	State Program	4	98001	06-30-13
Tennessee	State Program	4	TN02961	06-30-13
Texas	NELAP	6	T104704185-08-TX	11-30-13
USDA	Federal		SAV 3-04	04-07-14
Virginia	NELAP	3	460161	06-14-13 *
Washington	State Program	10	C1794	06-10-13 *
West Virginia	State Program	3	9950C	12-31-13

* Expired certification is currently pending renewal and is considered valid.

TestAmerica Tampa

Certification Summary

Client: Hillsborough County Public Utilities Dep
Project/Site: SELF-IAMP Monitoring Wells

TestAmerica Job ID: 660-54741-1

Laboratory: TestAmerica Savannah (Continued)

All certifications held by this laboratory are listed. Not all certifications are applicable to this report.

Authority	Program	EPA Region	Certification ID	Expiration Date
West Virginia DEP	State Program	3	94	06-30-13
Wisconsin	State Program	5	999819810	08-31-13
Wyoming	State Program	8	8TMS-Q	06-30-13

3.7° C Cu^{0.7}

6712 Benjamin Road Suite 100
Tampa, FL 33634
Phone (813) 885-7427 Fax (813) 885-7049

TestAmerica

THE LEADER IN ENVIRONMENTAL TESTING

[illegible]

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15

PURGING DATA

WELL VOLUME PURGE: 1 WELL VOLUME = (TOTAL WELL DEPTH - STATIC DEPTH TO WATER) X WELL CAPACITY

EQUIPMENT VOLUME PURGE: 1 EQUIPMENT VOL. = PUMP VOLUME + (TUBING CAPACITY X TUBING LENGTH) + FLOW CELL VOLUME

INITIAL PUMP OR TUBING DEPTH IN WELL (feet):	FINAL PUMP OR TUBING DEPTH IN WELL (feet):	PURGING INITIATED AT:	PURGING ENDED AT:	TOTAL VOLUME PURGED (gallons):
177.35	177.35	10:22	11:11	14.5

WELL CAPACITY (Gallons Per Foot): 0.75" = 0.02; 1" = 0.04; 1.25" = 0.06; 2" = 0.16; 3" = 0.37; 4" = 0.65; 5" = 1.02; 6" = 1.47; 12" = 5.88
TUBING INSIDE DIA. CAPACITY (Gal./Ft.): 1/8" = 0.0006; 3/16" = 0.0014; 1/4" = 0.0026; 5/16" = 0.004; 3/8" = 0.008; 1/2" = 0.010; 5/8" = 0.016

PURGING EQUIPMENT CODES: B = Baller; BP = Bladder Pump; ESP = Electric Submersible Pump; PP = Peristaltic Pump; O = Other (Specify)

SAMPLED BY (PRINT) / AFFILIATION: Andrew Balloun / Mike Townsend	SAMPLER(S) SIGNATURE(S): 	SAMPLING INITIATED AT: 11:13	SAMPLING ENDED AT: 11:15
---	---	------------------------------	--------------------------

FIELD DECONTAMINATION:	PUMP	Y	(N)	TUBING	Y	(N replaced)	DUPLICATE:	Y	(N)
------------------------	------	---	-----	--------	---	--------------	------------	---	-----

SAMPLE CONTAINER SPECIFICATION	SAMPLE PRESERVATION	INTENDED ANALYSIS AND/OR	SAMPLING EQUIPMENT	SAMPLE PUMP FLOW RATE
--------------------------------	---------------------	--------------------------	--------------------	-----------------------

REMARKS:

SEE C.D.C. FOR ANALYSIS

SAMPLING EQUIPMENT CODES: APP = After Peristaltic Pump; B = Bailer; BP = Bladder Pump; ESP = Electric Submersible Pump;
RFPP = Reverse Flow Peristaltic Pump; SM = Straw Method (Tubing Gravity Drain); O = Other (Specify)

2. **STABILIZATION CRITERIA FOR RANGE OF VARIATION OF LAST THREE CONSECUTIVE READINGS (SEE FS 2212, SECTION 3)**

Revision Date: February 12, 2009

Age Group	Percentage
1	10%
2	10%
3	10%
4	10%
5	10%
6	10%
7	10%
8	10%
9	10%
10	10%
11	10%
12	10%
13	10%
14	10%
15	10%

Age Group	Percentage
1	10%
2	10%
3	10%
4	10%
5	10%
6	10%
7	10%
8	10%
9	10%
10	10%
11	10%
12	10%
13	10%
14	10%
15	10%

Age Group	Percentage
1	10%
2	10%
3	10%
4	10%
5	10%
6	10%
7	10%
8	10%
9	10%
10	10%
11	10%
12	10%
13	10%
14	10%
15	10%

Age Group	Percentage
1	10%
2	10%
3	10%
4	10%
5	10%
6	10%
7	10%
8	10%
9	10%
10	10%
11	10%
12	10%
13	10%
14	10%
15	10%

Age Group	Percentage
1	10%
2	10%
3	10%
4	10%
5	10%
6	10%
7	10%
8	10%
9	10%
10	10%
11	10%
12	10%
13	10%
14	10%
15	10%

Age Group	Percentage
1	10%
2	10%
3	10%
4	10%
5	10%
6	10%
7	10%
8	10%
9	10%
10	10%
11	10%
12	10%
13	10%
14	10%
15	10%

Age Group	Percentage
1	10%
2	10%
3	10%
4	10%
5	10%
6	10%
7	10%
8	10%
9	10%
10	10%
11	10%
12	10%
13	10%
14	10%
15	10%

Age Group	Percentage
1	10%
2	10%
3	10%
4	10%
5	10%
6	10%
7	10%
8	10%
9	10%
10	10%
11	10%
12	10%
13	10%
14	10%
15	10%

Age Group	Percentage
1	10%
2	10%
3	10%
4	10%
5	10%
6	10%
7	10%
8	10%
9	10%
10	10%
11	10%
12	10%
13	10%
14	10%
15	10%

Age Group	Percentage
1	10%
2	10%
3	10%
4	10%
5	10%
6	10%
7	10%
8	10%
9	10%
10	10%
11	10%
12	10%
13	10%
14	10%
15	10%

Login Sample Receipt Checklist

Client: Hillsborough County Public Utilities Dep

Job Number: 660-54741-1

Login Number: 54741

List Source: TestAmerica Tampa

List Number: 1

Creator: Redding, Charles S

Question	Answer	Comment
Radioactivity wasn't checked or is $\leq$ background as measured by a survey meter.	N/A	
The cooler's custody seal, if present, is intact.	True	
Sample custody seals, if present, are intact.	True	
The cooler or samples do not appear to have been compromised or tampered with.	True	
Samples were received on ice.	True	
Cooler Temperature is acceptable.	True	
Cooler Temperature is recorded.	True	
COC is present.	True	
COC is filled out in ink and legible.	True	
COC is filled out with all pertinent information.	True	
Is the Field Sampler's name present on COC?	True	
There are no discrepancies between the containers received and the COC.	True	
Samples are received within Holding Time.	True	
Sample containers have legible labels.	True	
Containers are not broken or leaking.	True	
Sample collection date/times are provided.	True	
Appropriate sample containers are used.	True	
Sample bottles are completely filled.	True	
Sample Preservation Verified.	True	
There is sufficient vol. for all requested analyses, incl. any requested MS/MSDs	True	
Containers requiring zero headspace have no headspace or bubble is $<6\text{mm}$ (1/4").	N/A	
Multiphasic samples are not present.	True	
Samples do not require splitting or compositing.	True	
Residual Chlorine Checked.	N/A	

Login Sample Receipt Checklist

Client: Hillsborough County Public Utilities Dep

Job Number: 660-54741-1

Login Number: 54741

List Number: 1

Creator: Conner, Keaton

List Source: TestAmerica Savannah

List Creation: 06/07/13 08:42 AM

Question	Answer	Comment
Radioactivity wasn't checked or is $\leq$ background as measured by a survey meter.	True	
The cooler's custody seal, if present, is intact.	True	
Sample custody seals, if present, are intact.	True	
The cooler or samples do not appear to have been compromised or tampered with.	True	
Samples were received on ice.	True	
Cooler Temperature is acceptable.	True	
Cooler Temperature is recorded.	True	
COC is present.	True	
COC is filled out in ink and legible.	True	
COC is filled out with all pertinent information.	True	
Is the Field Sampler's name present on COC?	N/A	
There are no discrepancies between the containers received and the COC.	True	
Samples are received within Holding Time.	True	
Sample containers have legible labels.	True	
Containers are not broken or leaking.	True	
Sample collection date/times are provided.	True	
Appropriate sample containers are used.	True	
Sample bottles are completely filled.	True	
Sample Preservation Verified.	True	
There is sufficient vol. for all requested analyses, incl. any requested MS/MSDs	True	
Containers requiring zero headspace have no headspace or bubble is $<6\text{mm}$ (1/4").	True	
Multiphasic samples are not present.	True	
Samples do not require splitting or compositing.	True	
Residual Chlorine Checked.	N/A	