## Smith, George

From:	Al-Khalaf, Laila <lal-khalaf@scsengineers.com></lal-khalaf@scsengineers.com>
Sent:	Wednesday, March 24, 2021 2:46 PM
То:	Tafuni, Steven; SWD_Waste
Cc:	Robert.shankle; Bryan White (bryan.white@mymanatee.org); Anthony Detweiler
	(anthony.detweiler@mymanatee.org); Cooper, Dan; Restrepo, Carlos; Townsend, Stephen
Subject:	2021 First Quarter Landfill Gas Monitoring Report - Lena Road Landfill WACS #44795
Attachments:	Lena Road LF - Q1 2021 Gas Probe Monitoring Report.pdf

Mr. Tafuni,

Please find the attached Landfill Gas Monitoring Report for the first quarter of 2021 for the Lena Road Landfill in Manatee County (WACS # 44795). Included in this report are the LFG perimeter monitoring probes and buildings sampling results.

There were no exceedances observed during this event.

Please let us know if you have any questions or require any additional information.

Thank you,

Laila Al-Khalaf, M.S. Associate Staff Professional SCS Engineers 3922 Coconut Palm Drive, Suite 102 Tampa, FL 33619 813.270.0518 (C) 813.621.0080 (W) Ial-khalaf@scsengineers.com

### **Driven by Client Success**

www.scsengineers.com



# SCS ENGINEERS

March 24, 2021 File No. 09217088.21

Mr. Steve Tafuni Florida Department of Environmental Protection Southwest District Office 13051 N. Telecom Parkway Temple Terrace, FL, 33737-0926

Subject: Landfill Gas Monitoring Report, First Quarter 2021 Methane Perimeter Probes and Buildings Sampling Lena Road Landfill, Manatee County, Florida Permit # 39884-021-S0/01

### Dear Mr. Tafuni:

SCS Engineers (SCS) is pleased to submit the results of the first quarter 2021 landfill gas (LFG) monitoring probes and buildings monitoring at Lena Road Landfill in accordance with Rule 62-701.530(2)(c), F.A.C. per specific condition Part E-4 of the landfill's operations permit #39884-021-S0-01. Provided below is a description of our activities, summary of the monitoring results, and recommendations.

## Background

At Lena Road Landfill, Stage I and Stage III are currently not accepting waste and have intermediate cover, while Stage II contains the active area of the site. There is an active LFG collection system encompassing Stage I, Stage II, and Stage III. Stage II contains the most recent addition to the LFG collection system with the expansion project completed on July 16, 2020. The current LFG collection system contains vertical and horizontal LFG extraction wells removing gas from the landfill.

LFG monitoring probes are designed to monitor whether methane and other gases are migrating underground outside of the landfill area. There are 11 LFG monitoring probes located on site around the boundaries of the Lena Road Landfill. Attachment 1 is a site map showing the LFG monitoring probe locations. This quarterly monitoring was conducted in accordance with Rule 62-701.530(2)(c), F.A.C. per specific condition Part E-4 of the landfill's operations permit #39884-021-S0-01.

Additionally, rule 62-701.530(1)(a) of the Florida Administrative Code (F.A.C.) requires the following:

- The methane concentration may not exceed 25 percent of the lower explosive limit (LEL) in structures on- or off-site. The LEL for methane is five percent by volume in air. Therefore, the maximum allowable concentration in on-site or off-site structures is 1.25 percent methane by volume.
- The methane concentration at or beyond the landfill property boundary may not exceed the LEL (i.e., five percent (5.0%) methane by volume).

Mr. Tafuni March 24, 2021 Page 2

## **Monitoring results**

On March 11, 2021, SCS personnel monitored the LFG monitoring probes and on-site structures using a Landtec GEM-5000 gas monitor to measure gas composition. The GEM-5000 measures gas by percent volume of methane, carbon dioxide, oxygen, and balance gas, which is considered to be composed primarily of nitrogen. The instrument was calibrated prior to use during the sampling events and the calibration sheets are included in Attachment 3.

### LFG Monitoring Probes

Attachment 2 shows the readings obtained from the 11 LFG monitoring probes along the property boundary, no methane was detected in the monitoring probes. A site plan showing the probe locations is included in Attachment 1.

Monitoring of On-Site Structures

No methane was detected in any of the monitored structures on site, as shown in Attachment 2. In the buildings, SCS monitored both restrooms, the offices, and common areas. Readings were taken while walking around the buildings and interior rooms in a continuous manner. The location of the buildings monitored can be seen in Attachment 1.

### Conclusions

The methane percentage values are all below the regulatory threshold for the 11 LFG monitoring probes and structures. The facility is thus in compliance with its operations permit for gas migration and monitoring and no further tests are required until the second quarter of 2021.

Please call us at (813) 621-0080 if you have any questions or would like additional information.

Sincerely,


Laila Al-Khalaf Associate Staff Professional SCS Engineers

Carlos A. Restrepo, P.E. Project Manager SCS Engineers

Attachment

cc: Robert Shankle – Utilities Department Director, Manatee County (electronic) Bryan White – Landfill Superintendent, Manatee County (electronic) Anthony Detweiler – Operations Supervisor, Manatee County (electronic)

# ATTACHMENT 1 LFG MONITORING PROBE LOCATIONS

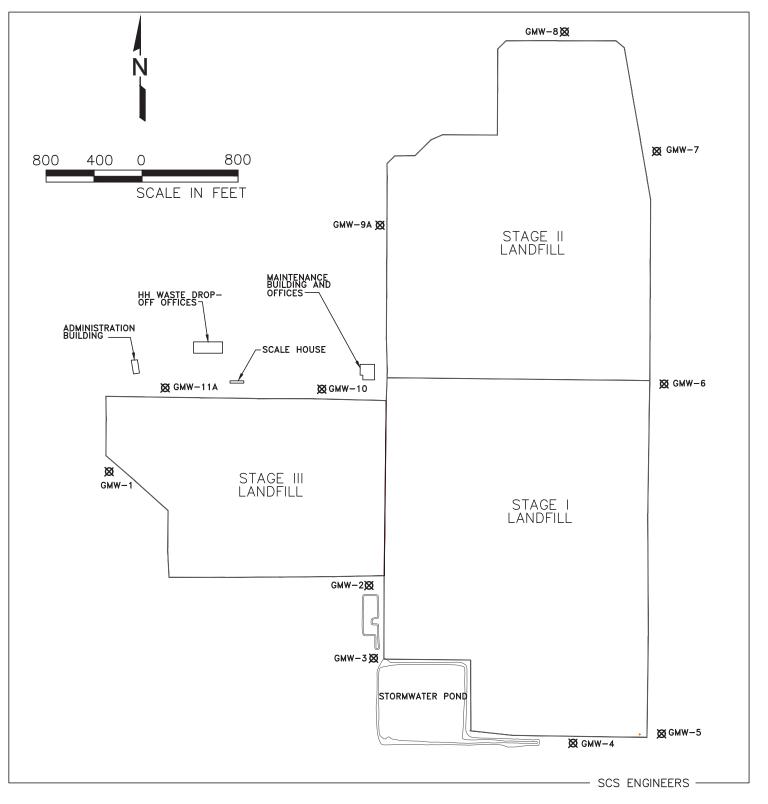

\\tam-fs01\Tampa\Files\PROJECT\09217088.10\Task 3 - LFG\2019 Quarterly Probe Monitoring\Gas Probe Maps\Gas Probe Map.dwg Jul 03, 2019 - 11:16am Layout Name: Map By: 4430swt

Lena Road Landfill, Manatee County, Florida Attachment 1: Gas Monitoring Probes & Building Locations

# ATTACHMENT 2

# **1ST QUARTER PROBE/BUILDING MONITORING RESULTS**

### ATTACHMENT 2 LANDFILL GAS MIGRATION MONITORING 1ST QUARTER 2021 LENA ROAD LANDFILL, MANATEE COUNTY, FLORIDA

Probe No.	CH <sub>4</sub>	CO <sub>2</sub>	<b>O</b> <sub>2</sub>	Balance	Comments	
Frobe No.	(%)	(%)	(%)	(%)	Comments	
GMW-1	0.0	0.8	19.9	79.3	Below regulatory threshold	
GMW-2	0.0	0.4	19.8	79.7	Below regulatory threshold	
GMW-3	0.0	1.1	19.6	79.3	Below regulatory threshold	
GMW-4	0.0	0.6	19.6	79.8	Below regulatory threshold	
GMW-5	0.0	0.5	19.8	79.7	Below regulatory threshold	
GMW-6	0.0	1.3	19.0	79.6	Below regulatory threshold	
GMW-7	0.0	0.6	19.8	79.5	Below regulatory threshold	
GMW-8	0.0	0.3	19.9	79.8	Below regulatory threshold	
GMW-9A	0.0	3.6	16.8	79.6	Below regulatory threshold	
GMW-10	0.0	0.3	20.0	79.7	Below regulatory threshold	
GMW-11A	0.0	2.2	18.3	79.5	Below regulatory threshold	

On-Site Structures	CH <sub>4</sub> (%)	% LEL
HH Waste Drop-off Area (Recycling Bldg)	0.0	0.0
HH Waste Drop-off Office (Recycling Bldg)	0.0	0.0
Scale House Bldg	0.0	0.0
Administration Bldg	0.0	0.0
Maintenance Office	0.0	0.0
Maintenance Bldg	0.0	0.0

Notes:

1. Monitoring performed by SCS Engineers on: 3/11/2021

- 2. Temperature: 73°F
- 3. Barometric Pressure: 30.31 "Hg
- 4. % LEL = % CH\_4 above background / 5% Volume for CH\_4 LEL \* 100

# ATTACHMENT 3 GEM CALIBRATION SHEET

#### **GEM-5000 Field Calibration Data Sheet**

GEM-5000 Instrument Data	Calibration Gas Manufacturer's Data		
Instrument Serial No.: G500213	Manufactured by:	Pine	
Technician Name: Laila Al-Khalaf	Manufactured date:	18-Oct	
Date and Time: 3/11/2021 9:55 AM	Lot Number:	KBI-399-S-4	
Last Factory Calibration Date: August 2020	Expiration Date:	10/24/2022	

Prior to taking any measurements the instrument must undergo a full calibration according to manufacturer's instructions. This should then be followed by a calibration verification using ambient air and calibration gas to verify instrument performance prior to measurement.

Tabulated below are the acceptable gas concentrations that should be demonstrated when zeroing the instrument and calibrating the span gas concentrations.

Zero Gas Composition				
CH <sub>4</sub> (%)	CO <sub>2</sub> (%)	N <sub>2</sub> (%)	O <sub>2</sub> (%)	
0.0	0.0	0.0	0.0 (Calibration Gas)	

Span Gas Composition				
CH <sub>4</sub> (%)	CO <sub>2</sub> (%)	N <sub>2</sub> (%)	O <sub>2</sub> (%)	
15.0	15.0	Bal	0.0	

#### Calibration must be verified by conducting the following procedures:

1) Turn on the instrument and allow it to run and purge with ambient air for 3 minutes and then record the gas concentration readings.

2) Apply calibration gas to the instrument, wait 1 minute for the readings to stabilize and then record the gas concentration readings.

3) Determine if the reading is within 10% of calibration gas concentration. If so indicate that the instrument "Passes" the field calibration for that gas.

4) If any of the sensors display a reading outside of the acceptable range, then a full manufacturer's calibration must be performed.

Target Gas (%)	Ambient Air Purge Gas Readings (%)	Acceptable Ambient Air Range (%)	Calibration Gas Instrument Readings (%)	Acceptable Calibration Gas Range (%)	Pass/Fail
$CH_4$	0.0	0.0 - 0.3	15.2	12.0 - 18.0	Pass
CO <sub>2</sub>	0.0	0.0 - 0.3	15.3	12.0 - 18.0	Pass
O <sub>2</sub>	21.1	19.9 - 21.9	0.0	0.0 - 1.0	Pass

Page 1 of 1