

Ramey, Ashleigh

From: Al-Khalaf, Laila <LAI-Khalaf@scsengineers.com>
Sent: Wednesday, October 12, 2022 11:31 AM
To: SWD_Waste; Tafuni, Steven
Cc: Cooper, Dan; Dickey, Donovan; Bryan White; Anthony Detweiler (anthony.detweiler@mymanatee.org); Richard Jones
Subject: 2022 Third Quarter Landfill Gas Monitoring Report - Lena Road Landfill
Attachments: Lena Road LF - Q3 2022 Gas Probe Monitoring Report.pdf

EXTERNAL MESSAGE

This email originated outside of DEP. Please use caution when opening attachments, clicking links, or responding to this email.

Mr. Tafuni,

Please find the attached Landfill Gas Monitoring Report for the third quarter of 2022 for the Lena Road Landfill in Manatee County (WACS #44795). Included in this report are the LFG perimeter monitoring probes and buildings sampling results.

There were no exceedances observed during this event.

Please let us know if you have any questions or require any additional information.

Thank you,
Laila Al-Khalaf, E.I.T.
Staff Professional
SCS Engineers
3922 Coconut Palm Drive, Suite 102
Tampa, FL 33619
813.270.0518 (C)
lal-khalaf@scsengineers.com

Driven by Client Success
www.scsengineers.com

October 10, 2022
File No. 09217088.24

Mr. Steve Tafuni
Florida Department of Environmental Protection
Southwest District Office
13051 N. Telecom Parkway
Temple Terrace, FL, 33737-0926

Subject: Landfill Gas Monitoring Report, Third Quarter 2022
Methane Perimeter Probes and Buildings Sampling
Lena Road Landfill, Manatee County, Florida
Permit # 39884-021-SO/01

Dear Mr. Tafuni:

On behalf of Manatee County, Solid Waste Division, SCS Engineers (SCS) hereby submits the results of the third quarter 2022 landfill gas (LFG) monitoring probes and buildings monitoring at Lena Road Landfill. Monitoring was conducted in accordance with Rule 62-701.530(2)(c), F.A.C. and specific condition Part E-4 of the landfill's operations permit #39884-021-SO/01. Provided below is a description of our activities, summary of the monitoring results, and recommendations.

Background

At Lena Road Landfill, Stage I and Stage III are currently not accepting waste and have intermediate cover, while Stage II contains the active area of the site. There is an active LFG collection system encompassing Stage I, Stage II, and Stage III. Stage II contains the most recent addition to the LFG collection system, a horizontal collector system completed in Cell 4C completed in September 2022. The current LFG collection system contains vertical and horizontal LFG extraction wells removing gas from the landfill.

LFG monitoring probes are designed to monitor whether methane and other gases are migrating underground outside of the landfill area. There are 11 LFG monitoring probes located on site around the boundaries of the Lena Road Landfill. **Attachment 1** is a site map showing the LFG monitoring probe locations. This quarterly monitoring was conducted in accordance with Rule 62-701.530(2)(c), F.A.C. and specific condition Part E-4 of the landfill's operations permit #39884-021-SO-01.

Additionally, rule 62-701.530(1)(a) of the Florida Administrative Code (F.A.C.) requires the following:

- The methane concentration may not exceed 25 percent of the lower explosive limit (LEL) in structures on- or off-site. The LEL for methane is five percent by volume in air. Therefore, the maximum allowable concentration in on-site or off-site structures is 1.25 percent methane by volume.
- The methane concentration at or beyond the landfill property boundary may not exceed the LEL (i.e., five percent (5.0%) methane by volume).

Monitoring results

On August 5th, 2022, SCS personnel monitored the LFG monitoring probes and on-site structures using a Landtec GEM-5000 gas monitor to measure gas composition. The GEM-5000 measures gas by percent volume of methane, carbon dioxide, oxygen, and balance gas, which is considered to be composed primarily of nitrogen. The instrument was calibrated prior to use during the sampling events and the calibration sheets are included in **Attachment 3**.

LFG Monitoring Probes

Attachment 2 shows the readings obtained from the 11 LFG monitoring probes along the property boundary, no methane was detected in the monitoring probes above the LEL. A site plan showing the probe locations is included in **Attachment 1**.

Monitoring of On-Site Structures

Methane was detected at below background concentrations in all of the monitored structures on site, as shown in **Attachment 2**. The Gem 5000 recorded 0.2 methane in ambient air during calibration. For there to be a detection in the %LEL methane would have to be detected above 0.1 or background, therefore the %LEL is still represented as 0 as methane did not exceed the background concentrations. In the buildings, SCS monitored both restrooms, the offices, and common areas. Readings were taken while walking around the buildings and interior rooms in a continuous manner. The location of the buildings monitored can be seen in **Attachment 1**.

Conclusions

The methane percentage values are all below the regulatory threshold for the 11 LFG monitoring probes and structures. The facility is thus in compliance with its operations permit for gas migration and monitoring and no further tests are required until the fourth quarter of 2022.

Please call us at (813) 621-0080 if you have any questions or would like additional information.

Sincerely,



Laila Al-Khalaf, E.I.T.
Staff Professional
SCS Engineers




Carlos Restrepo, P.E.
Project Manager
SCS Engineers

Attachment

cc: Bryan White – Landfill Superintendent, Manatee County (electronic)
Anthony Detweiler – Operations Supervisor, Manatee County (electronic)

ATTACHMENT 1
LFG MONITORING PROBE LOCATIONS

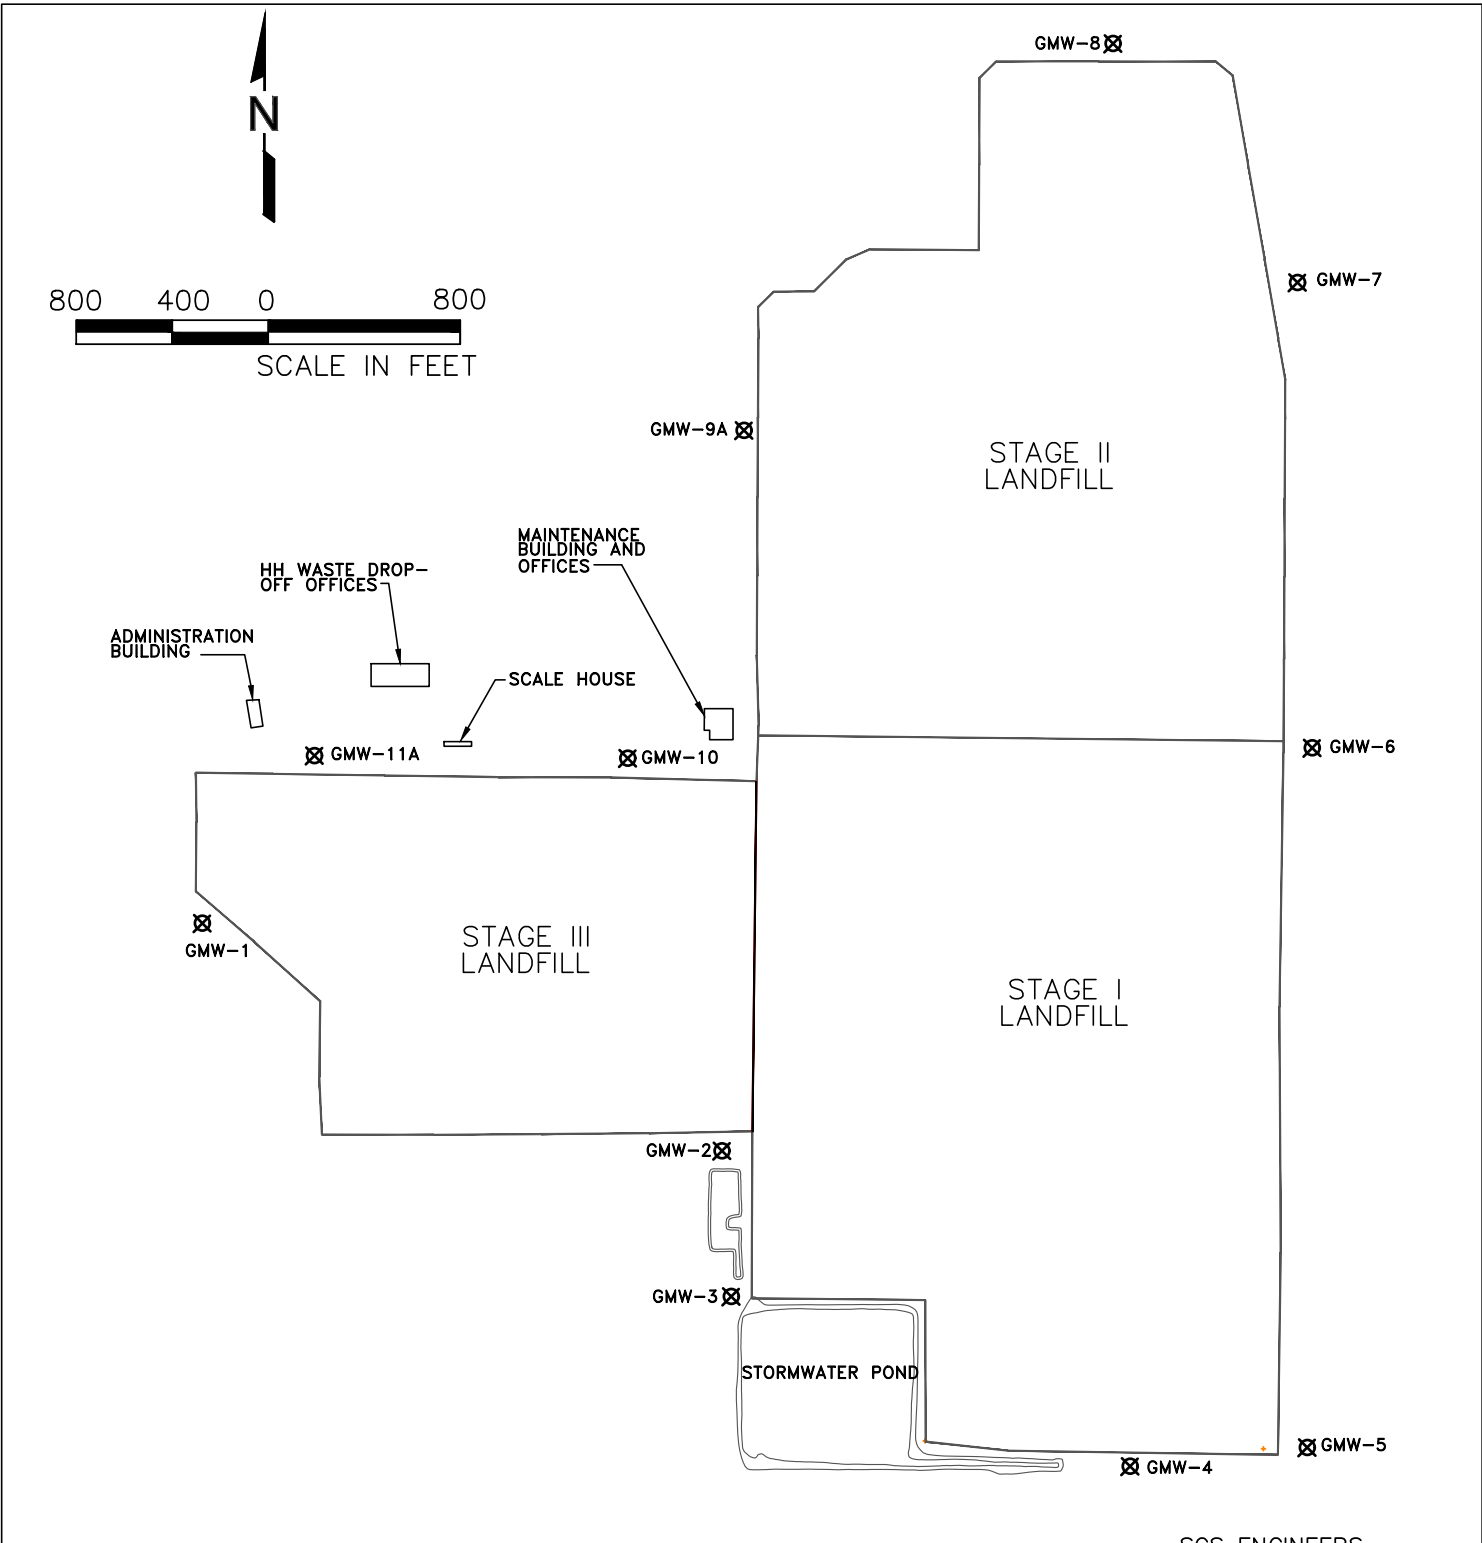

Lena Road Landfill, Manatee County, Florida
Attachment 1: Gas Monitoring Probes & Building Locations

ATTACHMENT 2
3RD QUARTER PROBE/BUILDING MONITORING RESULTS

ATTACHMENT 2
LANDFILL GAS MIGRATION MONITORING
3rd QUARTER 2022
LENA ROAD LANDFILL, MANATEE COUNTY, FLORIDA

Probe No.	CH₄ (%)	CO₂ (%)	O₂ (%)	Balance (%)
GMW-1	0.0	1.7	19.3	79.0
GMW-2	0.0	1.0	17.8	81.2
GMW-3	0.1	2.6	16.5	80.8
GMW-4	0.0	1.2	17.8	81.0
GMW-5	0.0	6.5	13.0	80.5
GMW-6	0.0	0.7	18.1	81.2
GMW-7	0.0	1.3	18.2	80.5
GMW-8	0.0	0.5	19.1	80.4
GMW-9A	0.0	1.0	18.8	80.2
GMW-10	0.0	0.2	19.7	80.1
GMW-11A	0.0	3.9	17.3	78.8

On-Site Structures	CH₄ (%)	% LEL
HH Waste Drop-off Area (Recycling Bldg)	0.0	0.0
HH Waste Drop-off Office (Recycling Bldg)	0.0	0.0
Scale House Bldg	0.0	0.0
Administration Bldg	0.0	0.0
Maintenance Office	0.0	0.0
Maintenance Bldg	0.0	0.0
Maintenance Shop	0.0	0.0

Notes:

1. Monitoring performed by SCS Engineers on: 8/5/2022
2. Temperature: 92°F
3. Barometric Pressure: 30.09"
4. % LEL = % CH₄ above background / 5% Volume for CH₄ LEL * 100

ATTACHMENT 3
GEM CALIBRATION SHEET

GEM-5000 Field Calibration Data Sheet

GEM-5000 Instrument Data

Instrument Serial No.: G500213
 Technician Name: Donovan Dickey
 Date and Time: 8/5/2022 1230 P.M.
 Last Factory Calibration Date: June 2022

Calibration Gas Manufacturer's Data

Manufactured by:	Pine
Manufactured date:	18-Oct
Lot Number:	KBI-399-S-4
Expiration Date:	5/30/23

Prior to taking any measurements the instrument must undergo a full calibration according to manufacturer's instructions. This should then be followed by a calibration verification using ambient air and calibration gas to verify instrument performance prior to measurement.

Tabulated below are the acceptable gas concentrations that should be demonstrated when zeroing the instrument and calibrating the span gas concentrations.

Zero Gas Composition			
CH ₄ (%)	CO ₂ (%)	N ₂ (%)	O ₂ (%)
0.0	0.0	0.0	0.0 (Calibration Gas)

Span Gas Composition			
CH ₄ (%)	CO ₂ (%)	N ₂ (%)	O ₂ (%)
15.0	15.0	Bal	0.0

Calibration must be verified by conducting the following procedures:

- 1) Turn on the instrument and allow it to run and purge with ambient air for 3 minutes and then record the gas concentration readings.
- 2) Apply calibration gas to the instrument, wait 1 minute for the readings to stabilize and then record the gas concentration readings.
- 3) Determine if the reading is within 10% of calibration gas concentration. If so indicate that the instrument "Passes" the field calibration for that gas.
- 4) If any of the sensors display a reading outside of the acceptable range, then a full manufacturer's calibration must be performed.

Target Gas (%)	Ambient Air Purge Gas Readings (%)	Acceptable Ambient Air Range (%)	Calibration Gas Instrument Readings (%)	Acceptable Calibration Gas Range (%)	Pass/Fail
CH ₄	0.2	0.0 - 0.3	15.3	12.0 - 18.0	Pass
CO ₂	0.0	0.0 - 0.3	14.5	12.0 - 18.0	Pass
O ₂	19.9	19.9 - 21.9	0.0	0.0 - 1.0	Pass